

---

**HP 9000 Series 700  
Model 715/725 Workstation  
Price & Configuration Guide  
Addendum**

*International Edition  
September 1988*

---

**New 715/75 Configuration**

**New 725/75 Configuration**


**HP Computer Museum**  
**[www.hpmuseum.net](http://www.hpmuseum.net)**

**For research and education purposes only.**

# New!

**Model 715/75 Performance Desktop Workstation**  
 75MHz PA-RISC Processor with integrated 75MHz Floating Point Co-Processor  
 SPECint92 = 61 ----- SPECfp92 = 113

## Options Diagram

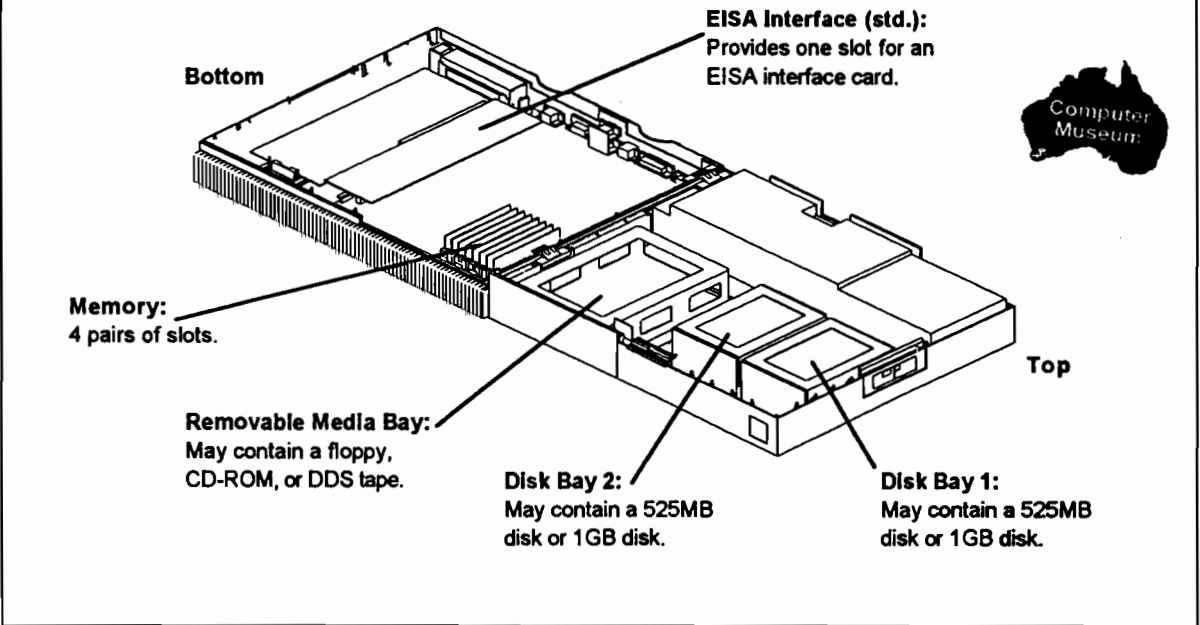

## Configuration Constraints

<b>Total Amount of RAM</b>	256MB	<b>Total No. of SCSI II Buses</b> 1 <input type="checkbox"/> One internal single-ended SCSI II bus <input type="checkbox"/> One add-on fast differential SCSI II bus via EISA slot
<b>Total Disk Capacity</b>	68.6GB	
<b>Number of EISA Slots</b>	1 (std.) EISA not available on CRX-24, CRX-24Z, and CRX-48Z	
<b>Internal Storage Configuration Constraints</b> Configurable with a maximum of two 3.5" SCSI II disks and one removable media device		
<b>Standard Single-ended SCSI II Bus Configuration Constraints</b> Supports a total of seven devices (including internal)		

ENTER "X" IN BRACKETS BELOW

Customer Name: \_\_\_\_\_

Quantity: \_\_\_\_\_

**MODEL 715/75 PA-RISC DESKTOP WORKSTATION**

Product #

<b>1. Required: Select Base Configuration</b> <input type="checkbox"/> 715/75 SPU with 32MB RAM	A2896A
<b>1.1 Required: Select One Graphics/Monitor Option</b> <input type="checkbox"/> Grayscale, 19" monitor <input type="checkbox"/> Color, 19" monitor <input type="checkbox"/> CRX-24 Color, 24-plane CRX graphics, 19" monitor <input type="checkbox"/> CRX-24Z Color, 24-plane CRX with accelerator and Z-buffer, 19" Monitor <input type="checkbox"/> CRX-48Z Color, 24-plane double buffered CRX with accelerator and Z-Buffer, 19" Monitor	AQ6 AQ7 AQ8 AQ9 AQA
<b>1.2 Optional: Additional Factory Integrated Memory - Select ONE only</b> <input type="checkbox"/> Add 32MB memory, for a total of 64MB <input type="checkbox"/> Add 96MB memory, for a total of 128MB <input type="checkbox"/> Add 224MB memory, for a total of 256MB	ANN ANY UFN
<b>1.3 Required: Factory Integrated Disks - Must Select ONE (Maximum of two internal disks)</b> qty <input type="checkbox"/> Add 525MB Single-Ended SCSI II Disk Drive. qty <input type="checkbox"/> Add 1GB Single-Ended SCSI II Disk Drive.	AT9 AT7
<b>1.4 Optional: Additional Factory Integrated Removable Media - Select ONE only</b> <input type="checkbox"/> Add 1.4MB 3.5" SCSI II Floppy Disk Drive. <input type="checkbox"/> Add 600MB 5.25" CD-ROM SCSI II Drive. <input type="checkbox"/> Add 2GB 3.5" DDS SCSI II Tape Drive. <input type="checkbox"/> Add 4-8GB DDS Tape Drive w/Data Compression	AMB AM8 AMW AMX
<b>1.5 Optional: Support Options - Select ONE only</b> <input type="checkbox"/> Upgrades warranty to 1-year next-day <input type="checkbox"/> Upgrades warranty to 1-year 4-hour <input type="checkbox"/> Upgrades warranty to 1-year next-day with phone support <input type="checkbox"/> Upgrades warranty to 1-year 4-hour with phone support <input type="checkbox"/> Installation	OS0 OS1 OS2 OS3 OS4
<b>2. Required: Workstation Localization Kit (Keyboard, Mouse, Powercord &amp; Doc.) - Must Select ONE</b> <input type="checkbox"/> HP-HIL Keyboard <input type="checkbox"/> PC Style Keyboard	A1099C A2205B
<b>2.1 Required: HP-UX Documentation Release</b> <input checked="" type="checkbox"/> HP-UX 9.0 Documentation	APH
<b>2.2 Required: Localized Option (See November '92 Price Guide for Complete List)</b> <input checked="" type="checkbox"/> _____	_____
<b>3. Recommended: Ethernet Kit (ThickLAN (AUI) connector is standard)</b> <input type="checkbox"/> Add-on ThinLAN Ethernet Transceiver <input type="checkbox"/> Add-on EtherTwist Transceiver	A2670A A2671A


To select Instant Ignition and pre-loaded software continue on Page 28 of the June Quick Reference

**New!**

**Model 725/75 Performance Desktop Workstation**

75MHz PA-RISC Processor with integrated 75MHz Floating Point Co-Processor  
 SPECint92 = 61 ----- SPECfp92 = 113

**Options Diagram**

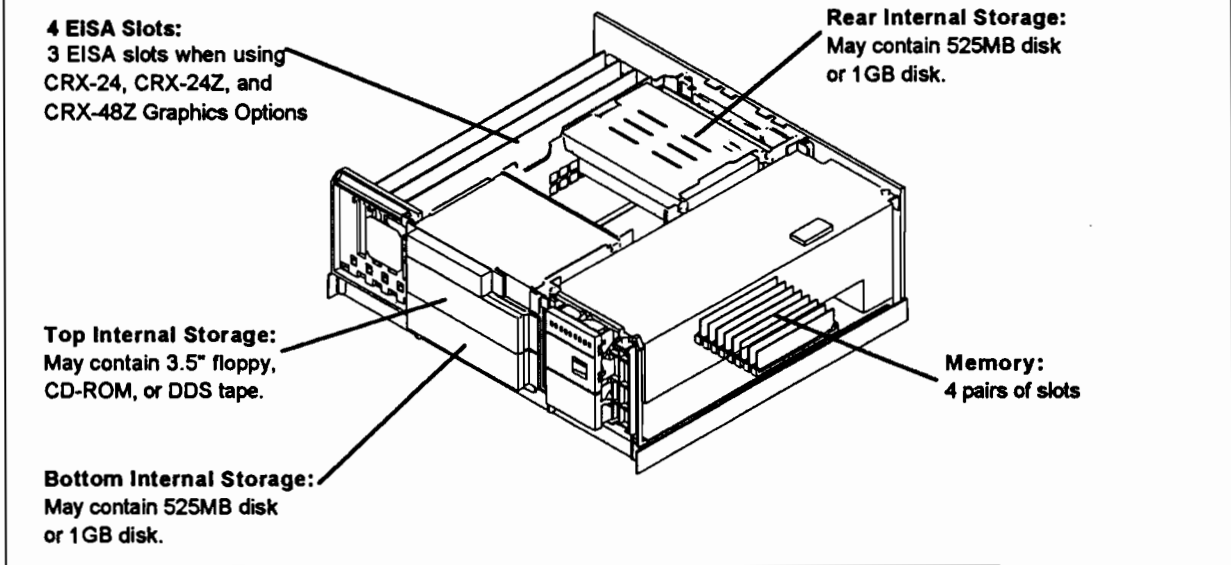

**Configuration Constraints**

<b>Total Amount of RAM</b>	256MB	<b>Total No. of SCSI II Buses</b> 1
<b>Total Disk Capacity</b>	239.8GB	
<b>Number of EISA slots</b>	4 (std.)	
<input type="checkbox"/> Only 3 EISA available on CRX-24, CRX-24Z, and CRX-48Z		<input type="checkbox"/> One internal single-ended SCSI II bus <input type="checkbox"/> Up to four add-on fast differential SCSI II buses available via EISA/SCSI card(s)
<b>Internal Storage Configuration Constraints</b>		
Configurable with a maximum of two 3.5" SCSI II disks and one removable media device		
<b>Standard Single-ended SCSI II Bus Configuration Constraints</b>		
Supports a total of seven devices (including internal)		

ENTER "X" IN BRACKETS BELOW












Customer Name: \_\_\_\_\_ Quantity: \_\_\_\_\_

**MODEL 725/75 PA-RISC DESKTOP WORKSTATION**

<b>1. Required: Select Base Configuration</b>		
<input type="checkbox"/>	725/75 SPU with 32MB RAM	A2897A
<b>1.1 Required: Select One Graphics/Monitor Option</b>		
<input type="checkbox"/>	Grayscale, 19" monitor	AQ6
<input type="checkbox"/>	Color, 19" monitor	AQ7
<input type="checkbox"/>	CRX-24 Color, 24-plane CRX graphics, 19" monitor	AQ8
<input type="checkbox"/>	CRX-24Z Color, 24-plane CRX with accelerator and Z-buffer, 19" Monitor	AQ9
<input type="checkbox"/>	CRX-48Z Color, 24-plane double buffered CRX with accelerator and Z-Buffer, 19" Monitor	AQA
<b>1.2 Optional: Additional Factory Integrated Memory - Select ONE only</b>		
<input type="checkbox"/>	Add 32MB memory, for a total of 64MB	ANN
<input type="checkbox"/>	Add 96MB memory, for a total of 128MB	ANY
<input type="checkbox"/>	Add 224MB memory, for a total of 256MB	UFN
<b>1.3 Required: Factory Integrated Disks - Must Select ONE (Maximum of two internal disks)</b>		
qty <input type="checkbox"/>	Add 525MB Single-Ended SCSI II Disk Drive.	AT9
qty <input type="checkbox"/>	Add 1GB Single-Ended SCSI II Disk Drive.	AT7
<b>1.4 Optional: Additional Factory Integrated Removable Media - Select ONE only</b>		
<input type="checkbox"/>	Add 1.4MB 3.5" SCSI II Floppy Disk Drive.	AMB
<input type="checkbox"/>	Add 600MB 5.25" CD-ROM SCSI II Drive.	AM8
<input type="checkbox"/>	Add 2GB 3.5" DDS SCSI II Tape Drive.	AMW
<input type="checkbox"/>	Add 4-8GB DDS Tape Drive w/Data Compression	AMX
<b>1.5 Optional: Support Options - Select ONE only</b>		
<input type="checkbox"/>	Upgrades warranty to 1-year next-day	OS0
<input type="checkbox"/>	Upgrades warranty to 1-year 4-hour	OS1
<input type="checkbox"/>	Upgrades warranty to 1-year next-day with phone support	OS2
<input type="checkbox"/>	Upgrades warranty to 1-year 4-hour with phone support	OS3
<input type="checkbox"/>	Installation	OS4
<b>2. Required: Workstation Localization Kit (Keyboard, Mouse, Powercord &amp; Doc.) - Must Select ONE</b>		
<input type="checkbox"/>	HP-HIL Keyboard	A1099C
<input type="checkbox"/>	PC Style Keyboard	A2205B
<b>2.1 Required: HP-UX Documentation Release</b>		
<input checked="" type="checkbox"/>	HP-UX 9.0 Documentation	APH
<b>2.2 Required: Localized Option (See November '92 Price Guide for Complete List)</b>		
<input checked="" type="checkbox"/>	_____	_____
<b>3. Recommended: Ethernet Kit (ThickLAN (AUI) connector is standard)</b>		
<input type="checkbox"/>	Add-on ThinLAN Ethernet Transceiver	A2670A
<input type="checkbox"/>	Add-on EtherTwist Transceiver	A2671A

To select Instant Ignition and pre-loaded software continue on Page 28 of the June Quick Reference

# Series 700 CPU Upgrades

From (with prerequisite)	To	Return to Factory	Product #
<b>Model 705</b> (Color)		<b>Model 710</b>	705 CPU A2647A
<b>Model 705</b> (Color, HP-UX 9.0, and MAU)		<b>Model 715/50</b>	705 CPU A2835A
<b>Model 710</b> (Color, HP-UX 9.0, and MAU)		<b>Model 715/50</b>	710 CPU A2836A
<b>Model 715/33</b> (19" Color/Grayscale 32MB RAM, EISA)		<b>Model 715/50</b>	715/33 CPU A2805A
<b>Model 715/33</b> (19" Color/Grayscale 32MB RAM, 525MB Disk, EISA Slot)		<b>Model 715/75</b>	715/33 CPU A2806A
<b>Model 715/50</b> (32MB RAM, 525MB Disk)		<b>Model 715/75</b>	715/50 CPU A2807A
<b>Model 720</b> (EISA Upgrade and HP-UX 9.0)		<b>Model 730</b>	720 CPU A1957A
<b>Model 720</b> (EISA Upgrade and HP-UX 9.0)		<b>Model 735</b> Options: Install LAN AUI Install FDDI	720 CPU A2605A #008 #009
<b>Model 725/50</b>		<b>Model 725/75</b>	725/50 CPU A2808A
<b>Model 730</b> (HP-UX 9.0)		<b>Model 735</b> Options: Install LAN AUI Install FDDI	730 CPU A2606A #008 #009
<b>Model 750</b> (HP-UX 9.0)		<b>Model 755</b> Options: Select LAN AUI Select FDDI	750 CPU A2248AU #AL9 #009



