



Disk Product Specifications and Site Environmental Requirements



HP Part No. 5955-3456
Printed in USA JUNE 1989

Fourteenth Edition
E0689

Notice

The information contained in this document is subject to change without notice.

HEWLETT-PACKARD MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. HEWLETT-PACKARD shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

HEWLETT-PACKARD assumes no responsibility for the use or reliability of its software on equipment that is not furnished by HEWLETT-PACKARD.

This document contains proprietary information, which is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced or translated to another language without the prior written consent of HEWLETT-PACKARD Company.

HP Computer Museum
www.hpmuseum.net

For research and education purposes only.

Printing History

New editions incorporate all update material since the previous edition. Updating Supplements, which are issued between editions, contain additional and revised information to be incorporated into the manual by the user. The date on the title page changes only when a new edition is published.

First Edition	AUG 1981
Second Edition	JAN 1982
Third Edition	MAY 1982
Fourth Edition	SEP 1982
Fifth Edition	APR 1983
Sixth Edition	AUG 1983
Seventh Edition	JAN 1984
Update 1	APR 1984
Eighth Edition	MAY 1984
Ninth Edition	NOV 1984
Update 1	1 FEB 1985
Tenth Edition	MAR 1985
Update 1	14 JUN 1985
Eleventh Edition	JUNE 1986
Update 1	20 OCT 1986
Update 2	15 MAY 1987
Twelfth Edition	AUGUST 1987
Update 1	27 APRIL 1988
Thirteenth Edition	JULY 1988
Fourteenth Edition	JUNE 1989

Preface

This manual contains detailed product specifications and environmental requirements for Hewlett-Packard disk products. This information is intended primarily to aid HP CEs in assisting customers in establishing the proper operating environment for their disk products. However, this manual may be of use to anyone involved in the planning of computer operating sites. It is assumed anyone involved in site preparation is familiar with the terms and concepts associated with product specifications and environmental topics.

The information in this manual is organized into the following chapters and appendixes:

- Chapters 1 - 3 contain general information about environmental parameters and factors involved in site selection. This material should provide a better understanding of environmental issues and how they affect the performance and reliability of disk products.
- Appendix A contains the detailed product specifications and environmental requirements information. A table at the beginning of the appendix lists all the products included.
- Appendixes B and C contains condensed specifications and environmental requirements for products not included in Appendix A. These are disk products no longer in production.
- Appendix D contains power cord option information.

This manual should be available early enough in the site planning stage to allow the customer adequate time to provide the proper operating environment for the disk product when it arrives. Using the information in Appendix A, the customer can establish the environmental operating limits that meet the product requirements.

Regulatory Statements

The products listed in Appendix A meet either FCC classification A or B. Refer to the Electromagnetic Emissions specifications to determine the classification of the product.

For USA Only

The Federal Communications Commission (in 47 CFR 15.818) has specified that the following notice be brought to the attention of the users of this product.

FEDERAL COMMUNICATIONS COMMISSION RADIO FREQUENCY INTERFERENCE STATEMENT

Warning: This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, may cause interference to radio communications. It has been tested and found to comply with the limits for Class A computing devices pursuant to Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

For USA Only

The Federal Communications Commission (in 47 CFR 15.838) has specified that the following notice be brought to the attention of the users of this product.

FEDERAL COMMUNICATIONS COMMISSION RADIO FREQUENCY INTERFERENCE STATEMENT

Warning: This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing device in accordance with the specifications in Subpart J of Part 15 of FCC Rules, which are designed to provide reasonable protection

against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: re-orient the receiving antenna; relocate the computer with respect to the receiver; move the computer away from the receiver; plug the computer into a different branch circuit. If necessary, the user should consult the dealer or authorized field service representative for additional suggestions. The user may find the following booklet prepared by the Federal Communications Commission helpful: *Interference Handbook*. This booklet is available from the U.S. Government Printing Office, Washington, DC 20402. Stock No. 004-000-00450-7.

Contents

1. General Information	
Introduction	1-1
Product Testing	1-1
Customer Responsibility	1-2
Customer Engineering Services	1-2
2. Environmental Requirements	
Introduction	2-1
Effects of Climate	2-2
Vibration and Shock	2-3
Altitude	2-4
Electromagnetic Susceptibility	2-7
Radiated Interference Susceptibility	2-7
Conducted Interference Susceptibility	2-8
Electrostatic Discharge	2-8
Magnetic Susceptibility	2-8
Power Line Irregularities	2-8
Contaminants	2-11
Particulate Contaminants	2-13
Corrosive Contaminants	2-13
Cooling Requirements	2-15
Tilting	2-15
3. Site Planning	
Introduction	3-1
Environmental Specifications	3-1
Recommended Specifications	3-2
Operating Specifications	3-2
Nonoperating Specifications	3-2
Long-Term Storage	3-2

Environments	3-3
Controlled Computer Room Environment	3-3
General Office Environment	3-3
Acoustics	3-4

A. Product Specifications

Introduction	A-1
HP 7907A Disk Drive Specifications	A-3
Operating Specifications	A-3
Physical Characteristics	A-4
Operating Characteristics	A-5
Environmental Requirements	A-7
HP 7911, 7912, and 7914 Disk Drives Specifications	A-11
Operating Specifications	A-11
Physical Characteristics	A-13
Operating Characteristics	A-15
Environmental Requirements	A-18
HP 7914ST Disk/Tape Subsystem Specifications	A-22
Physical Characteristics	A-22
Operating Characteristics	A-22
Environmental Requirements	A-25
HP 7914TD Disk/Tape Subsystem Specifications	A-29
Physical Characteristics	A-29
Operating Characteristics	A-29
Environmental Requirements	A-32
HP 7914CT Disk/Tape Drive Specifications	A-36
Operating Specifications	A-36
Physical Characteristics	A-38
Operating Characteristics	A-39
Environmental Requirements	A-41
HP 7933H/35H and 7933XP/35XP Disk Drives Specifications	A-45
Operating Specifications	A-45
Physical Characteristics	A-47
Operating Characteristics	A-47
Environmental Requirements	A-50
HP 97935A Media Module Specifications	A-56
Environmental Requirements	A-56
HP 7941A and 7945A Disk Drives Specifications	A-59



Operating Specifications	A-59
Physical Characteristics	A-60
Operating Characteristics	A-61
Environmental Requirements	A-63
HP 7942A and 7946A Disk Drives Specifications	A-68
Operating Specifications	A-68
Physical Characteristics	A-70
Operating Characteristics	A-71
Environmental Requirements	A-73
HP 7957A and 7958A Disk Drives Specifications	A-78
Operating Specifications	A-78
Physical Characteristics	A-79
Operating Characteristics	A-80
Environmental Requirements	A-82
HP 7936H/37H, 7936XP/37XP, and 7936FL/37FL Disk Drives Specifications	A-87
Operating Specifications	A-87
Physical Characteristics	A-89
Operating Characteristics	A-89
Environmental Requirements	A-92
HP 19514A Cabinet Specifications	A-97
Physical Characteristics	A-97
Operating Characteristics	A-97
Environmental Requirements	A-100
HP 7957B, 7958B, and 7959B Disk Drives Specifications	A-107
Operating Specifications	A-107
Physical Characteristics	A-108
Operating Characteristics	A-109
Environmental Requirements	A-111
HP 7957S, 7958S, and 7959S Disk Drives Specifications	A-116
Operating Specifications	A-116
Physical Characteristics	A-117
Operating Characteristics	A-118
Environmental Requirements	A-120
HP 7961B, 7962B, and 7963B Disk Drives Specifications	A-125
Operating Specifications	A-125
Physical Characteristics	A-126
Operating Characteristics	A-127

Environmental Requirements	A-130
HP 9262B and 9263B Disk Drives Specifications	A-135
Operating Specifications	A-135
Physical Characteristics	A-136
Operating Characteristics	A-137
Environmental Requirements	A-141

B. Typical Current Useage for Products No Longer In Production	
Introduction	B-1

C. Environmental Requirements for Products No Longer In Production	
Introduction	C-1

D. Power Cord Options	
Introduction	D-1

Index

Figures

2-1. Random Vibration Profile 1: Operating	2-5
2-2. Random Vibration Profile 2: Nonoperating	2-5
2-3. Random Vibration Profile 3: Operating	2-6
2-4. Random Vibration Profile 4: Nonoperating	2-6
2-5. Shock Profile: Operating and Nonoperating	2-7
2-6. Transient Voltage Waveforms	2-10
2-7. Size of Common Air Contaminants	2-11
2-8. Contaminant Sizes Compared to Disk/Head Spacing	2-12
A-1. HP 7911R/7912R/7914R Dimensions	A-14
A-2. HP 7933/7935 Power Cords	A-54
A-3. PDU Power Cord	A-105
A-4. Wall Breaker Trip Requirements	A-106
D-1. Power Cord Options	D-2

Tables

A-1. Disk Products Covered	A-2
A-2. Nominal Worst Case Current	A-49
B-1. Typical Current For Products No Longer In Production	B-1
C-1. Environmental Requirements For Products No Longer In Production	C-2
D-1. Power Cord Options By Country	D-4

General Information

Introduction

This manual provides product specifications and environmental requirements for many of Hewlett-Packard's rigid disk products. The disk products covered in this manual are listed in appendixes A, B, and C.

The information in this manual covers only the specified Hewlett-Packard disk products. The customer is responsible for meeting the site environmental requirements for the rest of the system components. If the disk product is to be installed on Hewlett-Packard computer equipment, appropriate site preparation documentation, including environmental requirements, will be provided for each system component.

Product Testing

The quality and reliability features of a product must be developed early in the product design stage and carried through the manufacturing process. Hewlett-Packard seeks to design and build the highest quality and reliability into our products starting at the bread-board design stage.

To ensure that the product design meets its quality goals, Hewlett-Packard employs a rigorous type testing program. With type testing, a group of units are tested and the results are used to represent that particular product.

Due to the length of testing time, and in some cases the increased stress levels applied to the product, it is not practical to test each product manufactured to every environmental specification. However, certain tests are performed on each product as it completes the manufacturing cycle. This testing ensures that each product is as good as the product that was environmentally tested.

Customer Responsibility

While Hewlett-Packard provides consultation on site environmental requirements, the scheduling, planning, preparation and verification of a site environment suitable for installation of an HP disk product is the customer's responsibility. Hewlett-Packard Sales and Support Personnel are available during the pre-installation period to assist the customer.

The customer is responsible for furnishing all labor and materials for site preparation, site maintenance, conformance to local codes, and the compatibility of Hewlett-Packard products with local laws, codes and licenses. The customer is solely responsible for establishing and maintaining the site requirements specified at the site planning meeting. Failures resulting from such unspecified environmental or physical phenomena are not covered by warranty or maintenance agreement. Such phenomena include, but are not limited to, unusual shock or electrical damage, accident, fire or water damage, neglect, air conditioning failure, humidity control failure, damages during transportation by customer or causes other than ordinary use, or toxic or corrosive chemicals present in the air.

Customer Engineering Services

Hewlett-Packard offers complete on-site customer engineering maintenance service on a world-wide basis. Charges for this service, quoted as a basic monthly maintenance charge (BMMC), are among the lowest in the industry, contributing to the low overall cost of ownership associated with the purchase of an HP disk product.

Provisions of the BMMC require compliance with the specifications and/or recommendations listed in this manual, unless escalation procedures are implemented. Conditions that are identified as having a detrimental effect on product performance (e.g., corrosive gases, noisy or unstable power source, etc.) must be corrected prior to installation.

For further details, contact your nearest Hewlett-Packard Sales and Support Office.

1-2 General Information

Environmental Requirements

Introduction

Environmental requirements are those items required to ensure that Hewlett-Packard disk products meet their published operational characteristics. Each environmental item has a specific measurable parameter or information that affects the operational characteristics of the drive. Continual operation of a disk product outside the limits of the recommended environmental limits may result in degradation of product operation. The environmental requirements cover both the actual physical location of the disk product and the associated area.

The following items are considered environmental requirements:

- Temperature.
- Humidity.
- Shock.
- Vibration.
- Altitude.
- Electromagnetic Susceptibility.
- Power.
- Contaminants.
- Cooling Requirements.
- Tilting.



Effects of Climate

All HP disk products can operate in an environment suitable for human occupancy as long as moisture will not condense within the environment, and room air does not contain chemical contaminants which may degrade disk product components. Along with the environment in which the product operates, the effects of outside temperature, humidity, altitude and other regional characteristics must be taken into consideration. For example:

- At higher altitudes, the efficiency of a cooling fan decreases because of reduced air density. Consider keeping the disk product enclosure at a lower temperature to compensate for the reduced air density at the air intake vents.
- In locations where extremes of temperature and humidity prevail, consider the effects of such conditions on the disk product when the main power is shut down. For instance, in northern regions, the effects of winter nighttime temperatures should be considered when the main power is shut off.
- In warm, humid regions, a fungus growth prevention program should be considered.
- In shoreline installations, the site may require special air conditioners, dehumidifiers, and other items to reduce high humidity and corrosive salt in the air.

Reliability and performance are maximized when the product is operated within the recommended temperature and humidity range. The recommended temperature and relative humidity limits for each disk product are included in appendix A.

2-2 Environmental Requirements



Vibration and Shock

Vibration can cause slow degradation of mechanical parts and, when severe, can cause data errors in disk products; therefore, it should be avoided or controlled. Also, mechanical connections such as PCA connectors and cable connectors may be affected. The best preventive measure is to locate the site away from vibration-generating sources, such as heavy industrial machinery (stamp mills, etc.). Care in handling the disk product will also avoid problems resulting from sudden shock.

Hewlett-Packard disk products are tested using random vibration techniques. Random vibration is superior as a test technique in that all product resonances can be excited simultaneously. This is especially necessary with products whose performance characteristics are statistical in nature and can only be measured over a period of time, such as disk drives and tape drives. It is impractical to do a long-duration, single-frequency test at every frequency. In addition, a sweep through the frequency range does not give adequate statistics for problem frequencies. Only random vibration offers both thoroughness and timeliness.

Some environments contain vibration at discrete frequencies, whereas other environments contain broadband vibrations. Random vibration test-and-measurement techniques work for both environments. A frequency spectrum reveals the nature and magnitude of the vibration environment and can be compared directly to the spectra in this specification.

Random vibration testing has been used extensively in military and aerospace applications but does not have widespread use in commercial markets due to the high cost of test equipment. In our continuing effort to build quality products, cost alone cannot justify a compromised test program. Because it is relatively new in this market, some explanation of terms and concepts is appropriate.

Random vibration has a magnitude that is not specified for any given instant of time. The instantaneous magnitude of a random vibration is specified only by probability distribution functions giving probable fraction of the total time that the magnitude lies within a specified frequency range. Random vibration contains no periodic or quasi-periodic constituents.

The magnitude of this distribution is measured in power spectral density (PSD) which is the limiting mean square acceleration per unit bandwidth. It

is measured in g^2/Hz and reveals how much energy is applied at a particular frequency.

A site can be qualified by comparing a frequency spectrum of the intended environment to the product specification spectra. The environment should be under the specification at every frequency. Exceptions will be evaluated on a case-by-case basis.

The two pairs of unpackaged vibration profiles used to test HP disk products are shown in Figure 2-1 through Figure 2-4. Each product is tested using one of the profile pairs, which include both operating and nonoperating vibration profiles. Each product's vibration specifications refer to the vibration profiles used to test the product. The vibration test verifies the product's operational and mechanical integrity.

The unpackaged operating and nonoperating shock profile used to test most HP disk products is shown in Figure 2-5. The shock test also verifies the product operational and mechanical integrity. The product shock specifications indicate the maximum acceleration levels at which no data loss will occur and no operator intervention will be required.

Altitude

Altitude must be considered for operating conditions. In the operating environment, the lower air density at extremely high altitudes may be insufficient to provide adequate cooling to the disk product, which may decrease performance and reliability.

2-4 Environmental Requirements

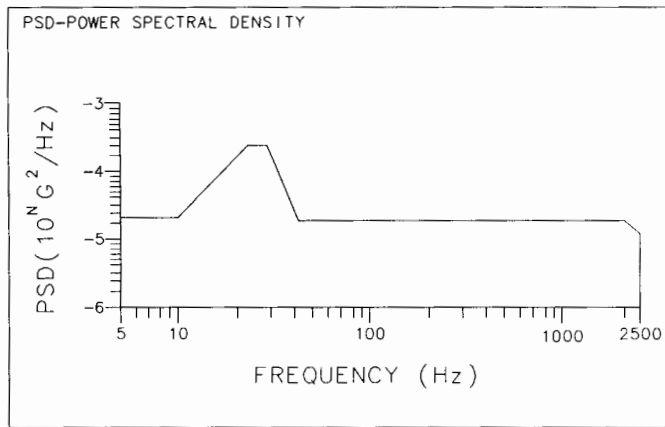


Figure 2-1. Random Vibration Profile 1: Operating

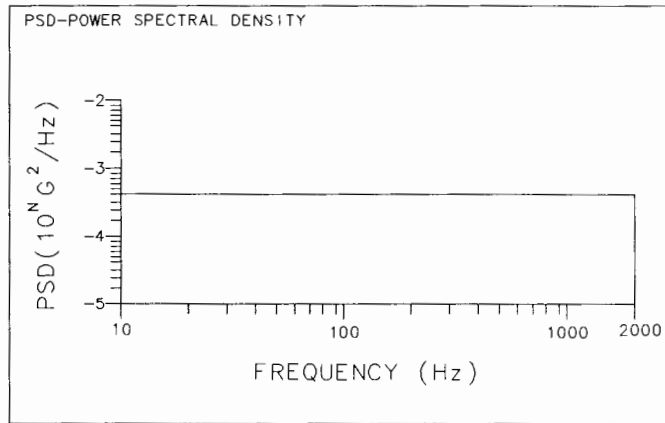


Figure 2-2. Random Vibration Profile 2: Nonoperating

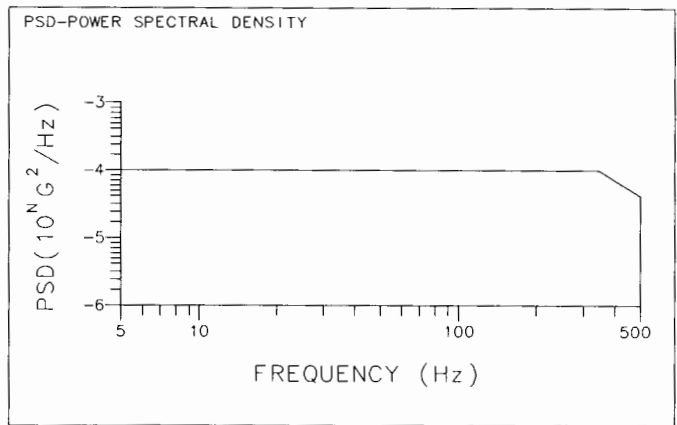


Figure 2-3. Random Vibration Profile 3: Operating

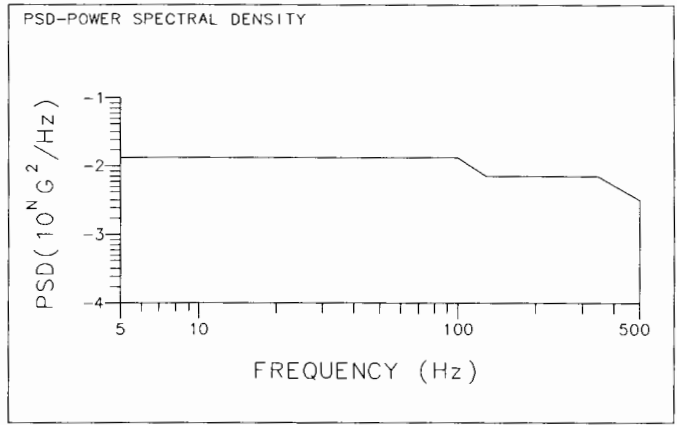


Figure 2-4. Random Vibration Profile 4: Nonoperating

2-6 Environmental Requirements

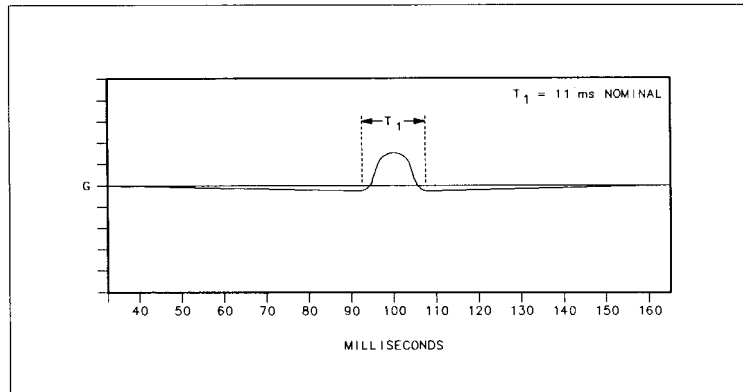


Figure 2-5. Shock Profile: Operating and Nonoperating


Electromagnetic Susceptibility

Every reasonable attempt is made to make HP disk products resistant to electromagnetic interference (EMI). However, in order to minimize the possibility of experiencing difficulty, it may be necessary to take unique steps. Such steps may include, but not be limited to, the following:

- Improving grounding techniques.
- Placing the drive in a grounded screen enclosure.
- Placing grounded copper screens on all windows.

Radiated Interference Susceptibility

Electronic equipment, including disk drives and tape drives, may exhibit unacceptable behavior if operation is attempted in environments where electromagnetic fields exist. Such environments might occur near radio and TV transmitting towers, or near radar installations like those found at airports. If radiated electromagnetic fields are suspected or verified (by direct measurement



using spectrum analyzers or field strength meters), precautions should be taken to shield the product from the electromagnetic field.

Conducted Interference Susceptibility

Radio frequency noise may be introduced into a disk product through the ac power line as well as through the air as an electric field. Power line conditioners and line filters are very effective in eliminating conducted radio frequency interference (RFI).

Electrostatic Discharge

Electrostatic discharge, commonly known as static electricity, may cause corruption of data, improper operation, or electronic failure. Carpeting, low humidity, and leather-soled shoes may all contribute to unacceptable electrostatic fields. If static discharges are detected (as when touching door knobs, or metallic objects), humidifiers, antistatic mats and other antistatic procedures should be implemented.

Magnetic Susceptibility

Disk drives, tape drives, and magnetic media (tapes, floppy disks and removable disk packs), may all exhibit destruction of stored data if exposed to magnetic fields. Keep all magnetic materials away from magnetic media and recording devices.

Power Line Irregularities

In some geographic areas, the available power used for the disk product may experience excessive voltage sags, surges, transients, outages, or other irregularities unacceptable for reliable operation. Therefore, a power quality survey must be conducted. The results of the survey should be analyzed for correct voltage, current, and phase; and the absence of detrimental power line transients and conducted interference, which can cause a malfunction to occur. If any item does not meet the specified requirements, action must be taken to correct the situation.

2-8 Environmental Requirements



Power line irregularities may be divided into the following categories:

- **Line Dropout.** HP disk products are designed to recover gracefully from short duration line dropouts. However, to ensure that long duration power line dropouts do not affect the continued operation of the disk product, an uninterruptible power supply (UPS) is required. Line conditioners and regulators will not help in this situation.
- **Over or Under Voltage.** Fluctuations from the nominal line voltage are experienced as the result of equipment on the power distribution network being turned on or off. Line voltage fluctuations can be caused by equipment anywhere on the power distribution network, not only that in the immediate vicinity. A power failure many miles away may cause voltage fluctuations. In a worst case situation, (e. g. brown out), a UPS is one example of a device that can provide uninterrupted power.
- **Line Transients.** Just as radio frequency noise may be transmitted over the ac power line, electrical noise may also be evidenced at the ac power outlet. Line transients may result in interrupted operation, blown fuses, or electrical failure. The waveforms used to test the power line transient response of HP disk products are shown in Figure 2-6. Two of the waveforms in the figure (A and B) are described in the *IEEE Guide on Surge Voltages in AC Circuits up to 600V, Final Draft*.
- **Neutral-to-Ground Noise.** This is the noise exhibited between the neutral and ground lines.
- **Ground-to-Ground Noise.** This is the noise exhibited between the product ground and earth ground.
- **Power Line Distortion.** This is an undesirable change in the original signal waveform that results in an unfaithful representation of the desired waveform. Waveform clipping is one example of this type of distortion. Noise in the form of extraneous signals superimposed on the desired waveform is not defined as distortion.

Power line conditioners may be helpful in regulating and conditioning ac power. Problems associated with power line irregularities are often very difficult to diagnose due to the unpredictable and intermittent nature of the problem.

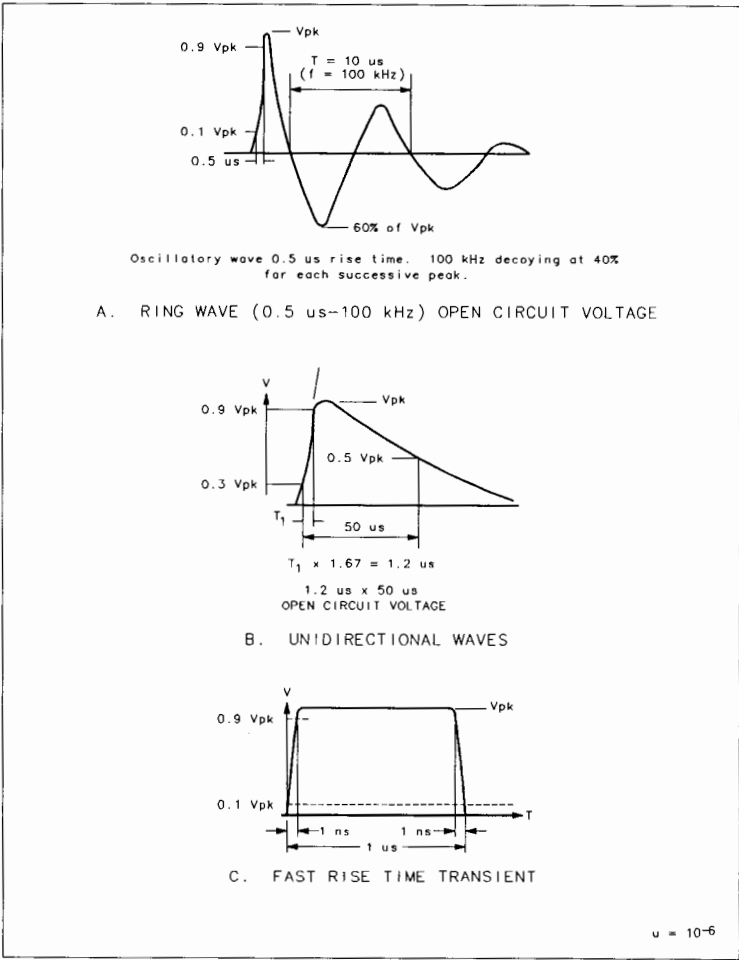


Figure 2-6. Transient Voltage Waveforms

Contaminants

Contaminants consist primarily of particulates or corrosives. Both may be airborne in atmospheric dust as a complex mixture of smokes, mists, fumes, dry granular particles, and fibers. The components of any mixture may consist of soot and smoke, silica, clay, organic materials, and metallic fragments. A sample may also include living organisms such as mold spores and bacteria.

Contaminants vary with locality, season of the year, direction and strength of the wind, and proximity of dust sources. Size of the particles also varies with differing conditions. The size ranges of typically encountered airborne particles are shown in Figure 2-7. The comparative sizes of some common contaminants and the head/disk gap of a disk drive are shown in Figure 2-8.

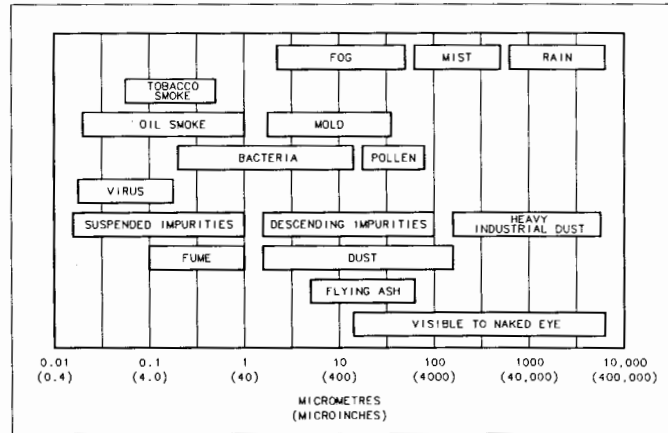


Figure 2-7. Size of Common Air Contaminants

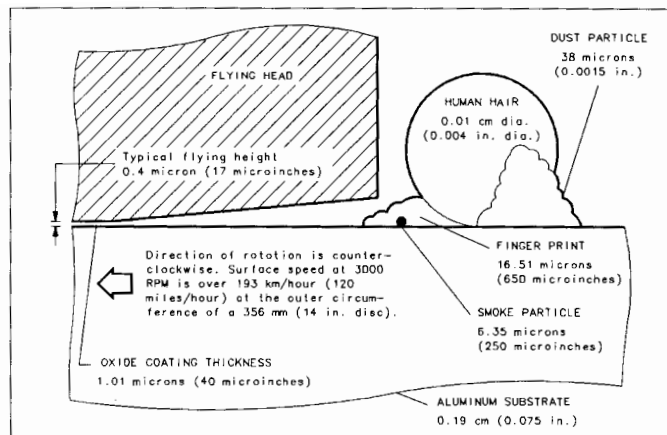


Figure 2-8. Contaminant Sizes Compared to Disk/Head Spacing

Note



Contaminants as yet have no measurable parameters except as rated for the product's particulate filter. Chemical contaminants that can corrode disk product components are presently being researched by Hewlett-Packard. Operating a disk product in an environment known to contain significant amounts of the listed contaminants will lead to malfunctions requiring extensive servicing. Therefore, we recommend that HP disk products not be stored or operated in areas that contain the corrosive contaminants listed in the following paragraphs.

2-12 Environmental Requirements

Particulate Contaminants

Particulate contaminants consist primarily of dust particles which are of various physical compositions. These particles present a clear abrasive hazard if introduced into the disk product's operating environment. In some instances, the particles are conductive and can short-circuit wiring in the disk product if an excessive amount accumulates. Also, film-forming particles and residues cause connector problems. Avoid operation in particularly dusty areas (e.g., factory floors, sawmills, etc).

In environments that contain hydrocarbons, particulate accumulation on the printed circuit assemblies (PCAs) causes an increase in the internal temperature of the disk product. Continual accumulations of particulates eventually prevent the product from maintaining the correct amount of cooling on the PCAs. This causes the product to operate beyond the specified temperature range and a malfunction may occur.

The particulate upper limit is expressed as the arithmetic mean value in micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) or micrograms per square centimeter per 30 days ($\mu\text{g}/\text{m}^2/30$ days). If particulate limits are not available for a product, the limits will not be listed in the table for that product. Operating an HP disk product at the upper limit may require an increase in the number of times the absolute filter must be changed, resulting in an increased basic monthly maintenance charge (BMMC).

Corrosive Contaminants

Corrosion is a complex form of material deterioration and is generally defined as the destruction of material by chemical or electrochemical reaction with its environment. Some effects of corrosion in disk products are the destruction of magnetic surfaces on disks and tapes, deterioration of plastics used in the equipment, and general degradation of conformal coatings on PCAs.

Many common problems can be avoided by isolating the product from contaminant-producing machinery. Examples of this type of machinery are office copiers, milling machines, and equipment that produces corrosive vapors or particulates. However, in areas where the atmosphere contains large amounts of various corrosive contaminants, more drastic measures must be taken to ensure clean air in the environment where the disk product is used.

Most environments are corrosive to some degree. Examples are air and moisture; fresh, distilled, or salt water; urban and industrial atmospheres; steam and other gases such as chlorine, ammonia, hydrogen sulfide, sulfur dioxide, and fuel gases; mineral acids such as hydrochloric, sulfuric, and nitric.

In general, inorganic materials are more corrosive than organic. For example, corrosion in the petroleum industry is due more to sodium chloride, sulfur, hydrochloric and sulfuric acids, and water than to oil, naphtha, or gasoline.

Corrosive environments such as that found in steel, acid, and paper manufacturing industries usually preclude the use of filtered ambient air for forced convection cooling. Corrosives generally cannot be filtered out by normal filtration methods, and the techniques that must be used are complex and costly. In these cases, the disk product must be enclosed in a highly controlled environment.

Note

Although the term "environment" as used here refers only to atmospheric contaminants, there is a strong link between corrosion rates and temperature and humidity conditions. Many corrosion processes (film thickness build-up, etc.) accelerate rapidly at high humidities and temperatures. This means that corrosive environments that possess high temperatures and humidities should be of particular concern.

The following are typical corrosive contaminants:

- **Sulfur Dioxide.** Sulfur dioxide is generally considered the most corrosive of the common contaminant gases. In combination with water, it forms sulfurous acid mist, an active and rapidly corrosive compound. It is known to produce molecular separation in polymers, and to cause spots on microfilm materials. This acid is found in industrial environments and causes deterioration of disk surfaces.
- **Total Oxidants.** The presence of strong oxidizing gases in the atmosphere, particularly ozone, is known to be potentially harmful to any organic material. The damaging effects most often encountered are the cross linking of elastomers, the cracking of stressed rubber, and the oxidation of silver.

2-14 Environmental Requirements

- **Hydrogen Sulfide.** Hydrogen sulfide is a rapid corrosive agent, particularly to copper and silver. Hydrogen sulfide is a common atmospheric contaminant found near oil fields, sulfur springs, and marshy areas, and occasionally is emitted from industrial or sewage treatment activities.
- **Ammonia.** In sufficient concentrations, ammonia has been found to cause cracking of stressed brass, decreased insulation resistance, and increased loss factor in certain insulators.
- **Halogens.** Halogens are chemical elements that are fairly corrosive. The halogens include fluorine, bromine, chlorine, and iodine. Halogens react strongly with metals and hydrogen to form halides. The metal halides are solid water-soluble salts such as table salt (sodium chloride). Halogens usually occur in salt deposits and sea water environments. Halogens (and their compounds) are widely used in medicine, photographic films, sanitation processes, disinfectants, insecticides, some textile processes, paints, bleaches and plastics.

Cooling Requirements

An internal fan provides adequate ventilation when the disk product is operated in the appropriate environment. To obtain maximum efficiency, allow the required clearances between the front and rear of the disk product. Air conditioning may be required to maintain the correct operating temperature. Install required air conditioning before operating HP disk products.

Tilting

Operating the drive at an angle greater than that specified may result in decreased performance due to increased seek times. A tilted drive may not be capable of meeting its seek time specifications. If the tilt angle is severe enough, the drive may be unable to seek at all.



Site Planning

Introduction

The purpose of site planning is to provide an optimum environment for computer products. By providing this optimum environment, customers will receive maximum satisfaction and success from their equipment. Continually operating a product at an extreme of the environmental requirements can reduce the product reliability.

Since Hewlett-Packard is dedicated to customer satisfaction, we make every effort to provide recommended operating environmental limits for our disk products. By providing an environment that fits within the range of the recommended environmental specifications, customers should receive maximum long-term, trouble-free operation of their Hewlett-Packard disk products.

Environmental Specifications

Three different specifications are given for most environmental requirements:

- Recommended Specifications.
- Operating Specifications.
- Nonoperating Specifications.

Recommended Specifications

Through experience, Hewlett-Packard has defined the specifications that will provide maximum long-term success for our customers. These are the recommended specifications

If the product specifications do not include a recommended value for a specific environmental parameter, we recommend that the customer provide an environment that fits into the mid-range of the operating specifications, where practical.

Operating Specifications

Operating specifications are those specifications that Hewlett-Packard, through type testing, has determined provide a safe (survival) operating range for the product. It also must be understood that continual operation at the extremes of this operating range results in stress on the product and can result in early failure or less reliable operation.

All possible combinations of stresses have not been type tested. The results of simultaneously applying worst case extremes of several environmental parameters are unpredictable.

Nonoperating Specifications

Nonoperating specifications are designated limits for transit and short-term storage of the product. Type testing has been completed to ensure that HP disk products will operate properly if these nonoperating specifications are not exceeded.

Long-Term Storage

If the product will be stored for an extended period of time, it must be properly packaged. The shipping carton is not designed to serve as a storage container and does not offer the necessary protection for long-term storage.

Long-term storage frequently requires the use of hermetically sealed packaging and desiccant. If you are not familiar with the requirements involved in preparing electro-mechanical equipment for long-term storage, contact a

3-2 Site Planning

commercial packaging company specializing in long-term storage for help in designing the proper packaging.

For further information contact your local Hewlett-Packard Sales Office.

Environments

There are basically two environments in which Hewlett-Packard disk products should be operated: the controlled computer room environment, and the general office environment.

Note



While many HP disk products have been operated successfully in environmental circumstances not optimally suited for reliable operation, there have also been circumstances where reliability has been adversely affected.

It is Hewlett-Packard's goal that our customers be highly successful in the use of our products. Therefore, we highly recommend that the time, energy, and effort be made to provide a benign environment for our products. Such an effort will be to the long term benefit of our customers.

Controlled Computer Room Environment

A controlled computer room is a physical area where all elements of the environment are closely controlled and monitored. Temperature, humidity, power, and all other environmental parameters are constantly maintained at levels consistent with the recommended specifications of the disk products and other equipment within the area.

As the name implies, this type of environment is usually created to support large computer systems which require strict environmental control. The disk products connected to such systems are typically the larger, higher capacity models.

General Office Environment

The general office environment includes those areas where personnel work on a full-time basis, and where environmental elements are subject to greater variations than those in a controlled computer room. Although greater environmental variations occur within this type of environment, the environmental limits of the disk products must not be exceeded.

When operating disk products in a general office environment it is recommended that customers make every effort to minimize adverse affects on the product. This includes, but is not limited to, providing a clean power source, reducing temperature and humidity swings, and controlling the circumstances where electrostatic discharge can cause reliability problems.

Acoustics

There are two methods of specifying acoustic emissions: sound pressure level and sound power level. Although sound pressure level is more commonly quoted because it yields a significantly lower number, sound power level is the more meaningful of the two measurements.

Sound pressure levels result from measuring only what reaches the sound meter. The disadvantage in comparing sound pressure levels is that the values are dependent upon test methods and measurement distances. For example, if sound pressure is measured from a long distance, the result is a very low number, although the product may be producing a lot of noise.

Sound power levels, however, take measurement distance and method into account and yield the actual noise level emitted by the product. Sound power level is the only valid number to use when comparing products.

Where applicable, the product specifications include both measurements to indicate the difference between the two values. The sound pressure values quoted in the product specifications are an average of nine points that lie on a parallelepiped whose surfaces are one meter from every product boundary.

3-4 Site Planning

Product Specifications

Introduction

This chapter contains detailed specifications and characteristics for the Hewlett-Packard disk products listed in table A-1. The information for each product is divided into four categories:

- Operating specifications - includes performance and capacity data.
- Physical characteristics - includes information on the size and weight of the product.
- Operating characteristics - includes such product characteristics as power, heat dissipation, acoustic emissions, electromagnetic emissions, and compliance to safety standards.
- Environmental requirements - includes operating, nonoperating, and recommended environmental limits for the product.

All product specifications are type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure they continue to meet published specifications. The specifications and characteristics for each disk product are applicable only when the product is installed and operated within its environmental limits.

For long-term, trouble-free operation, disk products should not be operated at their maximum environmental limits for extended periods of time. The recommended operating conditions included in each table define a less stressful operating environment for the product. Operating the product within its recommended operating range will ensure maximum customer satisfaction.

Note

Environmental specifications apply when the product is not connected to an HP system. When the product is connected to an HP system, the most stringent environmental and performance specifications listed for any single HP component within the system are applicable and supersede the disk product specifications.

Table A-1. Disk Products Covered

Product	Page
HP 7907A	A-3
HP 7911, 7912, 7914	A-11
HP 7914ST	A-22
HP 7914TD	A-29
HP 7914CT	A-36
HP 7933H, 7935H, 7933XP, 7935XP	A-45
HP 97935A (Media Module)	A-56
HP 7941A, 7945A	A-59
HP 7942A, 7946A	A-68
HP 7957A, 7958A	A-78
HP 7936H, 7937H, 7936XP, 7937XP, 7936FL, 7937FL	A-87
HP 19514A	A-97
HP 7957B, 7958B, 7959B	A-107
HP 7957S, 7958S, 7959S	A-116
HP 7961B, 7962B, 7963B	A-125
HP 9262B, 9263B	A-135

A-2 Product Specifications

HP 7907A Disk Drive Specifications

OPERATING SPECIFICATIONS

Note

The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	4.0 ms
Average seek time (including settling):	30 ms
Average rotational delay:	8.5 ms
Average time to transfer 1 kilobyte: (at 625 kilobytes/sec)	1.8 ms

Total average transaction time: (excluding system overhead)	44.3 ms
----------------------------------------------------------------	---------

Disk performance index:	22.6 I/Os per second ¹
-------------------------	-----------------------------------

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*



FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,384	64		
Surface	10,272,768	40,128	627	1
Removable	20,545,536	80,256	1,254	2
Total	41,091,072	160,512	2,508	4

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height (with feet):	180.3 mm (7.1 in.)
Height (without feet):	174.1 mm (6.9 in.)
Width:	325.1 mm (12.8 in.)
Depth:	487.7 mm (19.2 in.)

SERVICE CLEARANCE:

Front:	177.8 cm (7 in.)
Rear:	10.2 cm (4 in.)

WEIGHT

Net:	24.9 kg (55 lb)
Shipping:	29.1 kg (64.2 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum: 200 W (683 Btu/hr; 172 kcals/hr)
Typical: 145 W (495 Btu/hr; 125 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level B computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <5.25 milligauss at 4.6 m (15 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):
115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

HP 7907A

Frequency:	47.5 to 66 Hz
Maximum Power:	115 V setting; 200 W (90 V, 60 Hz) 230 V setting; 200 W (180 V, 50 Hz)
Typical Power:	115 V setting; 145 W (115 V, 60 Hz) 230 V setting; 145 W (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 3.0 A (true rms at 90 V, 60 Hz) 230 V setting; 1.7 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 1.7 A (true rms at 115 V, 60 Hz) 230 V setting; 1.0 A (true rms at 230 V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	54 dB(A)
Sound power level (L_{wA}):	67 dB(A)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

A-6 Product Specifications

ENVIRONMENTAL REQUIREMENTS

Note

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	10°C to 40°C (50°F to 104°F)
Nonoperating range:	-40°C to 75°C (-40°F to 167°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	5% to 95% relative humidity, noncondensing
Nonoperating:	5% to 95% relative humidity, noncondensing

VIBRATION

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g ² /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.00005 g ² /Hz at 500 Hz.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g ² /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g ² /Hz from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.0039 g ² /Hz at 500 Hz.

SHOCK

Recommended operating range:	<1.0 g
Operating:	2 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 3,000 m (9,840 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms

Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V rms
Operating limit:	<1 V rms
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<15 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 20 μ s wide pulse):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)
Fast rise time transients:	
Recommended operating limit:	<500 V (into 50 Ω load)
Operating limit:	<1 kV (into 50 Ω load)

POWER REQUIREMENTS

Voltages (true rms):	
115 V setting:	100 V, 115 V, 120 V, single phase (inclusive tolerance range is 90 V to 132 V)
230 V setting:	220 V, 240 V, single phase (inclusive tolerance range is 180 V to 264 V)

HP 7907A

Frequency:	47.5-66 Hz
Maximum Power:	115 V setting; 270 VA (90 V, 60 Hz) 230 V setting; 306 VA (230 V, 50 Hz)
Typical Power:	115 V setting; 195 VA (115 V, 60 Hz) 230 V setting; 230 VA (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 3.0 A (true rms at 90 V, 60 Hz) 230 V setting; 1.7 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 1.7 A (true rms at 115 V, 60 Hz) 230 V setting; 1.0 A (true rms at 230 V, 50 Hz)
Distortion:	<5% flat-topped harmonic distortion
Line Surge and Sag:	
Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec
Line Dropout:	Must not exceed 10 ms


TILT

When mounted using an HP 19507A Rackmount Kit, the HP 7907 shall meet all performance specifications throughout a 360° rotation. Shock and vibration testing has not been performed on the HP 7907 while being tilted.



HP 7911, 7912, and 7914 Disk Drives Specifications

OPERATING SPECIFICATIONS

Note  The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

DISK DRIVE PERFORMANCE

	7911	7912	7914
Average controller overhead time:	4.0 ms	4.0 ms	4.0 ms
Average seek time:	27.1 ms	27.1 ms	28.1 ms
Average rotational delay:	8.3 ms	8.3 ms	8.3 ms
Average time to transfer 1 kilobyte:	1.2 ms	1.2 ms	1.2 ms
Total average transaction time: (excluding system overhead)	40.6 ms	40.6 ms	41.6 ms
Disk performance index: (in I/Os per second ¹)	24.6	24.6	24.0

¹ Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.

TAPE DRIVE PERFORMANCE

Read/write tape speed: 152.4 cm/s (60 in./s)
 Search/rewind tape speed: 228.2 cm/s (90 in./s)

Data transfer rate: 35 kilobyte/s maximum¹

¹ *Maximum sustained transfer rate does not necessarily reflect system throughput, which varies depending upon application, file structures, and driver implementation.*

DISK DRIVE FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,384	64		
Head:				
7911/7912	9,376,148	36,608	572	
7914	18,874,368	73,728	1,152	
HP 7911	28,114,944	109,824	1,716	3
HP 7912	65,601,536	256,256	4,004	7
HP 7914	132,120,576	516,096	8,064	7

TAPE DRIVE FORMATTED CAPACITY

Item	Data Bytes Per	Words Per	Blocks Per	Tracks Per
Word	2			
Block	1,024	512		
Track:				
150 ft	1,046,578	523,264	1,022	
600 ft	4,186,112	2,093,056	4,088	
Cartridge:				
150 ft	16,744,448	8,372,224	16,352	16
600 ft	66,977,792	33,488,896	65,408	16

PHYSICAL CHARACTERISTICS

DIMENSIONS

P-Model:
Height 720 mm (28.3 in.)
Width 354 mm (14.0 in.)
Depth 711 mm (28.0 in.)

See figure A-1 for R-model dimensions.

HP 7911, 7912, 7914

WEIGHT

P-Model:	
Net:	85.4 kg (188 lb)
Shipping:	117.1 kg (258 lb)
R-Model:	
Net:	67.2 kg (148 lb)
Shipping:	89.9 kg (198 lb)

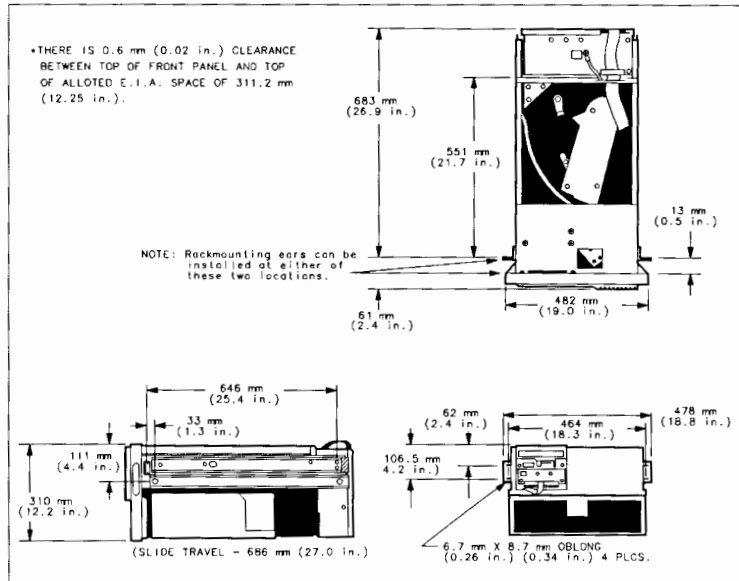


Figure A-1. HP 7911R/7912R/7914R Dimensions

A-14 Product Specifications

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum: 700 W (2389 Btu/hr; 602 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.
- The R-Model disk drive is intended for installation in an overall product that will affect the emissions characteristics. It is recommended that end-use products be tested for RFI emissions.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces

Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltage:	100, 120, 220, 240 V; +5%, -10%
Frequency:	50 Hz, 60 Hz; +10%, -5%
Phase:	Single
Maximum Current:	8 A at 120 V, 60 Hz
Typical Current:	4.2 A at 120 V, 60 Hz
Power:	700 watts maximum
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

ACOUSTIC EMISSIONS

P-Model:	
Average sound pressure level (L_{pA}):	54 dB(A)
Sound power level (L_{wA}):	68 dB(A)

R-Model not specified due to dependance on rack-mount configuration.

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range: **20°C to 25.5°C (68°F to 78°F)**
 Operating range: 10°C to 40°C (50°F to 104°F)
 Nonoperating range: -40°C to 60°C (-40°F to 140°F)

Maximum rate of change: 10°C (18°F) per hour

HUMIDITY

Operating: 20% to 80% relative humidity, noncondensing
 (wet bulb temp. not to exceed 25.6°C (78°F))

Nonoperating: 10% to 90% relative humidity, noncondensing
 (wet bulb temp. not to exceed 25.6°C (78°F))



VIBRATION

Operating:	
R-Model: (See figure 2-1)	Random vibration with power spectral density (PSD) of 0.000025 g ² /Hz from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of 0.00025 g ² /Hz from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of 0.000025 g ² /Hz from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of 0.0000125 g ² /Hz at 2500 Hz.
P-Model:	Random vibration with power spectral density (PSD) of 0.000009 g ² /Hz from 5 to 2500 Hz;
Nonoperating: (See figure 2-2)	Random vibration with power spectral density (PSD) of 0.0005 g ² /Hz from 10 to 2000 Hz.

SHOCK

Recommended operating range:	<0.67 g
Operating:	2 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4,600 m (15,000 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):

Recommended operating limit: <0.5 V/m
Operating limit: <3 V/m

Conducted (30 Hz to 50 kHz):

Recommended operating limit: <1 V rms
Operating limit: <3 V rms

Conducted (50 kHz to 400 MHz):

Recommended operating limit: <0.5 V (p-p)
Operating limit: <1 V (p-p)

Electrostatic Discharge:

Recommended operating limit: <5 kV
Operating limit: <12.5 kV

Magnetic:

<4 gauss, 47.5 to 198 Hz

Power line transients (per IEEE Standard P587.1/F):

Oscillatory wave (100 kHz ringing wave):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <1.5 kV (open circuit voltage)

Unidirectional wave (one 20 μ s wide pulse):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <1 kV (open circuit voltage)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS**Voltage:**

Recommended range: The daily average not to vary more than $\pm 2\%$ from the correct line voltage

Operating range: 100, 120, 220, 240 V; +5%, -10%

Frequency:

Recommended range: 47.5 to 52.5 Hz, 57 to 66 Hz

Operating range: 50 Hz, 60 Hz; +10%, -5%

Phase:

Single

Current:

8 A maximum at 120 V, 60 Hz)

Distortion:

<5% flat-topped harmonic distortion

Line Surge and Sag:

80% and 120% typical line voltage for 30 s

70% and 130% typical line voltage for 0.5 s

TILT

Can be operated in any position; however, the drive should not be rotated about its axis (vertical axis for P-model, horizontal axis for R-model) at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

HP 7914ST Disk/Tape Subsystem Specifications

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height	160 cm (62.9 in.)
Width:	63 cm (24.8 in.)
Depth:	81 cm (31.9 in.)

WEIGHT

Net (total):	
Standard:	269.0 kg (593 lb)
Option 114:	332.5 kg (846 lb)
Shipping (total):	
Standard (2 boxes):	294.8 kg (650 lb)
Option 114 (3 boxes):	383.7 kg (846 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Standard:	1,250 W (4,266 Btu/hr; 1,075 kcals/hr)
Option 240:	1,300 W (4,437 Btu/hr; 1,118 kcals/hr)
Option 114:	1,900 W (6,485 Btu/hr; 1,634 kcals/hr)
Option 240/114:	1950 W (6655 Btu/hr; 1677 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltage: 120, 220, 240 V, single phase; +5%, -10%

Frequency: 50 Hz, 60 Hz; +10%, -5%

Current: 16 A maximum at 120 V (with two drives)
8 A maximum at 220 or 240 V (with two drives)

Power:
Standard: 860 watts maximum at 66 Hz, 120 V
Option 114: 1,440 watts maximum at 66 Hz, 120 V

Line Dropout: No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

HP 7914ST

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	52 dB(A) (one drive) 54 dB(A) (two drives)
Sound power level (L_{wA}):	68 dB(A) (one drive) 68 dB(A) (two drives)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	15°C to 32°C (59°F to 90°F)
Maximum rate of change:	10°C (18°F) per hour

HUMIDITY

Operating:	20% to 80% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))
Nonoperating:	10% to 90% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))

VIBRATION (Tested in vertical axis only)

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g ² /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.00005 g ² /Hz at 500 Hz.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g ² /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g ² /Hz from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.0039 g ² /Hz at 500 Hz.

SHOCK

Recommended operating range:	<0.67 g
Operating:	2 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 3,000 m (9,840 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):

Recommended operating limit: <0.5 V/m
Operating limit: <3 V/m

Conducted (30 Hz to 50 kHz):

Recommended operating limit: <1 V rms
Operating limit: <3 V rms

Conducted (50 kHz to 400 MHz):

Recommended operating limit: <0.5 V (p-p)
Operating limit: <1 V (p-p)

Electrostatic Discharge:

Recommended operating limit: <5 kV
Operating limit: <10 kV

Magnetic:

<4 gauss, 47.5 to 198 Hz

Power line transients (per IEEE Standard P587.1/F):

Oscillatory wave (100 kHz ringing wave):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <1 kV (open circuit voltage)

Unidirectional wave (one 20 μ s wide pulse):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <1 kV (open circuit voltage)

POWER REQUIREMENTS

Voltage:

Recommended range: **The daily average not to vary more than $\pm 2\%$
from the correct line voltage**

Operating range: 120, 220, 240 V, single phase; +5%, -10%

Frequency:

Recommended range: **47.5 to 52.5 Hz, 57 to 66 Hz**

Operating range: 50 Hz, 60 Hz; +10%, -5%

Current:

16 A maximum at 120 V (with two drives)

8 A maximum at 220 or 240 V (with two drives)

Power:

Standard: 860 watts maximum at 66 Hz, 120 V

Option 114: 1,440 watts maximum at 66 Hz, 120 V

Distortion:

<5% flat-topped harmonic distortion

Line Surge and Sag:

80% and 120% typical line voltage for 30 s

70% and 130% typical line voltage for 0.5 s

TILT

Can be operated in any position; however, the drive should not be rotated about its axis (vertical axis for P-model, horizontal axis for R-model) at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

HP 7914TD Disk/Tape Subsystem Specifications

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height	161.3 cm (63.5 in.)
Width:	63.5 cm (25.0 in.)
Depth:	81.3 cm (32.0 in.)

WEIGHT

Net (total):	
Standard:	272.2 kg (600 lb)
Option 114:	339.4 kg (748 lb)
Shipping (total):	
Standard (2 boxes):	364.7 kg (804 lb)
Option 114 (3 boxes):	454.6 kg (1,002 lb)

OPERATING CHARACTERISTICS

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.

HP 7914TD

- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some IIP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltage: 120, 240 V, single phase; +5%, -10%
220 V, single phase; \pm 5%,
208, 240 V, two phase; +5%, -10%

Frequency: 50 Hz, 60 Hz; +10%, -5%

Current: 16 A maximum at 120 V (with two drives)
8 A maximum at 220 or 240 V (with two drives)

Power:
Standard: 925 watts maximum at 66 Hz, 120 V
Option 114: 1,625 watts maximum at 66 Hz, 120 V

Line Dropout: No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	60 dB(A) (two drives)
Sound power level (L_{wA}):	76 dB(A) (two drives)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range: 20°C to 25.5°C (68°F to 78°F)
Operating range: 10°C to 40°C (50°F to 104°F)
Nonoperating range: -40°C to 60°C (-40°F to 140°F)

Maximum rate of change: 10°C (18°F) per hour

HUMIDITY

Operating: 20% to 80% relative humidity, noncondensing
(wet bulb temp. not to exceed 25.6°C (78°F))

Nonoperating: 10% to 90% relative humidity, noncondensing
(wet bulb temp. not to exceed 25.6°C (78°F))

VIBRATION

Operating: (See figure 2-1)	Random vibration with power spectral density (PSD) of 0.000025 g ² /Hz from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of 0.00025 g ² /Hz from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of 0.000025 g ² /Hz from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of 0.0000125 g ² /Hz at 2500 Hz.
Nonoperating: (See figure 2-2)	Random vibration with power spectral density (PSD) of 0.0005 g ² /Hz from 10 to 2000 Hz.

SHOCK

Recommended operating range:	<0.67 g
Operating:	2 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 3,000 m (9,840 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms
Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V (p-p)
Operating limit:	<1 V (p-p)
Electrostatic Discharge:	
Recommended operating limit:	750 V
Operating limit:	<1.5 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 20 μ s wide pulse):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)



POWER REQUIREMENTS

Voltage:	120, 240 V, single phase; +5%, -10% 220 V, single phase; \pm 5%, 208, 240 V, two phase; +5%, -10%
Frequency:	
Recommended range:	47.5 to 52.5 Hz, 57 to 66 Hz
Operating range:	50 Hz, 60 Hz; +10%, -5%
Current:	16 A maximum at 120 V (with two drives) 8 A maximum at 220 or 240 V (with two drives)
Power:	
Standard:	925 watts maximum at 66 Hz, 120 V
Option 114:	1,625 watts maximum at 66 Hz, 120 V
Distortion:	<5% flat-topped harmonic distortion
Line Surge and Sag:	80% and 120% typical line voltage for 30 s 70% and 130% typical line voltage for 0.5 s

TILT

Can be operated in any position; however, the drive should not be rotated about its axis (vertical axis for P-model, horizontal axis for R-model) at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

HP 7914CT Disk/Tape Drive Specifications

OPERATING SPECIFICATIONS

Note



The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

DISK DRIVE PERFORMANCE

Average controller overhead time:	4.0 ms
Average seek time:	28.1 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kilobyte:	1.2 ms
Total average transaction time: (excluding system overhead)	41.6 ms
Disk performance index:	24 I/Os per second ¹

¹Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.

TAPE DRIVE PERFORMANCE

Read/write tape speed: 152.4 cm/s (60 in./s)
 Search/rewind tape speed: 228.2 cm/s (90 in./s)
 Data transfer rate: 35 kilobyte/s maximum¹

¹ *Maximum sustained transfer rate does not necessarily reflect system throughput, which varies depending upon application, file structures, and driver implementation.*

DISK DRIVE FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,384	64		
Head:	18,874,368	73,728	1,152	
HP 7914	132,120,576	516,096	8,064	7

TAPE DRIVE FORMATTED CAPACITY

Item	Data Bytes Per	Words Per	Blocks Per	Tracks Per
Word	2			
Block	1,024	512		
Track:				
150 ft	1,046,578	523,264	1,022	
600 ft	4,186,112	2,093,056	4,088	
Cartridge:				
150 ft	16,744,448	8,372,224	16,352	16
600 ft	66,977,792	33,488,896	65,408	16

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height	720 mm (28.3 in.)
Width:	375 mm (14.8 in.)
Depth:	777 mm (30.8 in.) (including baffle)

WEIGHT

Net:	109 kg (239 lb)
Shipping:	
Disk Drive	135 kg (297 lb)
Tape Drive	9 kg (19 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum: 700 W (2389 Btu/hr; 602 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some IIP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltage:	100, 120, 220, 240 V; +5%, -10%
Frequency:	50 Hz, 60 Hz; +10%, -5%
Phase:	Single
Current:	8 A maximum at 120 V, 60 Hz
Power:	700 watts maximum
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

ACOUSTIC EMISSIONS

P-Model:	
Average sound pressure level (L_{pA}):	50 dB(A)
Sound power level (L_{wA}):	63 dB(A)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range: 20°C to 25.5°C (68°F to 78°F)
Operating range: 10°C to 40°C (50°F to 104°F)
Nonoperating range: -40°C to 60°C (-40°F to 140°F)

Maximum rate of change: 10°C (18°F) per hour

HUMIDITY

Operating: 20% to 80% relative humidity, noncondensing
(wet bulb temp. not to exceed 24°C (75°F))
Nonoperating: 10% to 90% relative humidity, noncondensing
(wet bulb temp. not to exceed 25.6°C (78°F))

VIBRATION

Operating:	
R-Model:	Random vibration with power spectral density (PSD) of 0.000009 g ² /Hz from 10 to 2500 Hz.
Nonoperating: (See figure 2-2)	Random vibration with power spectral density (PSD) of 0.0005 g ² /Hz from 10 to 2000 Hz.

SHOCK

Recommended operating range:	<0.67 g
Operating:	2 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4,600 m (15,000 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms

Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V (p-p)
Operating limit:	<1 V (p-p)
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<12.5 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 20 μ s wide pulse):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltage:	
Recommended range:	The daily average not to vary more than $\pm 2\%$ from the correct line voltage
Operating range:	100, 120, 220, 240 V; +5%, -10%

HP 7914CT

Frequency:	
Recommended range:	47.5 to 52.5 Hz, 57 to 66 Hz
Operating range:	50 Hz, 60 Hz; +10%, -5%
Phase:	Single
Current:	8 A maximum at 120 V, 60 Hz
Distortion:	<5% flat-topped harmonic distortion
Line Surge and Sag:	80% and 120% typical line voltage for 30 s 70% and 130% typical line voltage for 0.5 s
Neutral-to-Ground Noise:	
Recommended limit:	<1 V (p-p)
Operating limit:	<10 V (p-p)
Ground-to-Ground Noise:	
Recommended limit:	<1 V (p-p)
Operating limit:	<10 V (p-p)

TILT

Can be operated in any position; however, the drive should not be rotated about its axis (vertical axis for P-model, horizontal axis for R-model) at a rate greater than 0.2 radians/second due to gyroscopic effects. Rotation beyond this rate can cause errors which require reinitialization of the media.

HP 7933H/35H and 7933XP/35XP Disk Drives Specifications

OPERATING SPECIFICATIONS

Note



The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.



FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	23,552	92		
Surface	31,112,192	121,532	1,321	1
Drive	404,458,496	1,579,916	17,173	13

PERFORMANCE

	XP-MODEL	H-MODEL
Average controller overhead:	4.5 ms	3.5 ms
Average seek time:	24.0 ms	24.0 ms
Average rotational delay ($\pm 10\%$):	11.1 ms	11.1 ms
Average time to transfer 1 kilobyte: (at 1 megabyte/sec)	1.0 ms	1.0 ms
Controller cache impact ¹ :	-16.6 ms	0 ms
Total average transaction time: (excluding system overhead)	24.0 ms	39.6 ms
Disk performance index: (in I/Os per second ²)	41.7	25.3

¹ The reduction in time is due to the reduced number of seeks required for a disk drive with controller cache. The actual performance improvement on a drive will vary, depending on the read hit rate and the read percentage; the listed values are based on a read hit rate of 70% and a read percentage of 70–75%. Hit rate is defined as the number of times the drive finds information in cache divided by the number of times the information is requested from the drive.

² Average disk transactions per second. Refers to fundamental disk performance; actual I/O rates are application dependent and must take into account system overhead, the system configuration, and the locality of data on the disk. The read hit rate and the read percentage will also have a significant impact on performance of the XP-model drive.

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height:	825 mm (32.5 in.)
Width:	552 mm (12.76 in.)
Depth:	834 mm (32.8 in.)

WEIGHT

Net:	154 kg (340 lb)
Shipping:	192 kg (423 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:	1,300 W (4,437 Btu/hr; 1,118 kcals/hr)
Typical:	1,100 W (3,754 Btu/hr; 946 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level A computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <10 gauss on all surfaces

POWER CHARACTERISTICS

Voltage: 120, 208, 220, 240 V; $\pm 10\%$
Frequency: 47.5 to 63 Hz
Phase: Single
Power: 1,300 watts maximum
Line Dropout: No effect on performance; no operator intervention required for dropout equal to or less than one-half cycle of the ac line (10.6 ms, 50 Hz; 8.3 ms, 60 Hz).

Current (nominal worst case): See table A-2.

Table A-2. Nominal Worst Case Current

Standard/ Option	Market Area	Voltage (Vac)	Disk Drive	Accessory Outlet	Total Current
Standard	USA	208	7.6 A	1.7 A	9.3 A
120	USA, Canada	120	13.0 A	3.0 A	16.0 A
210	Canada	208	7.6 A	1.7 A	9.3 A
220 221 222 223	Canada Continental Europe Switzerland Denmark	220	7.4 A	1.6 A	9.0 A
241 242	United Kingdom Australia, New Zealand	240	6.9 A	1.5 A	8.4 A

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}): 59 dB(A)
 Sound power level (L_{wA}): 73 dB(A)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
HP 7933 operating range:	10°C to 40°C (50°F to 104°F)
HP 7935 operating range:	10°C to 32°C (50°F to 90°F)
Nonoperating range:	-40°C to 65°C (-40°F to 149°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	8% to 80% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))
Nonoperating: (No media module installed)	5% to 95% relative humidity, noncondensing (wet bulb temp. not to exceed 29.5°C (85°F))

A-50 Product Specifications

VIBRATION

Operating: (See figure 2-1)	Random vibration with power spectral density (PSD) of 0.000025 g ² /Hz from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of 0.00025 g ² /Hz from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of 0.000025 g ² /Hz from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of 0.0000125 g ² /Hz at 2500 Hz.
Nonoperating: (See figure 2-2)	Random vibration with power spectral density (PSD) of 0.0005 g ² /Hz from 10 to 2000 Hz.

SHOCK

Recommended operating range:	<0.67 g
Operating:	2 g maximum at 11 ms, half sine waveform.
Nonoperating:	10 g maximum at 11 ms, half sine waveform.

ALTITUDE

Operating:	maximum 3,000 m (9,840 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<2 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms
Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V (p-p)
Operating limit:	<1 V (p-p)
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<15 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 20 μ s wide pulse):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)

COOLING REQUIREMENTS

Allow a minimum of 508 mm (20 in.) in front and 762 mm (30 in.) behind for adequate air flow.

POWER REQUIREMENTS

Power cords: See figure A-2 for required cords.

Voltage:

Recommended range: The daily average not to vary more than $\pm 2\%$ from the correct line voltage

Operating range: 120, 208, 220, 240 V; $\pm 10\%$

Frequency: 47.5 to 63 Hz

Phase: Single

Current (nominal worst case): See table A-2.

Power: 1,300 watts maximum

Distortion: $<5\%$ flat-topped harmonic distortion

Line Surge and Sag: 80% and 120% typical line voltage for 30 s
70% and 130% typical line voltage for 0.5 s

Neutral-to-Ground Noise:

Recommended limit: <1 V (p-p)

Operating limit: <2 V (p-p)

Ground-to-Ground Noise:

Recommended limit: <1 V (p-p)

Operating limit: <2 V (p-p)

HP 7933H/35H, 7933XP/35XP

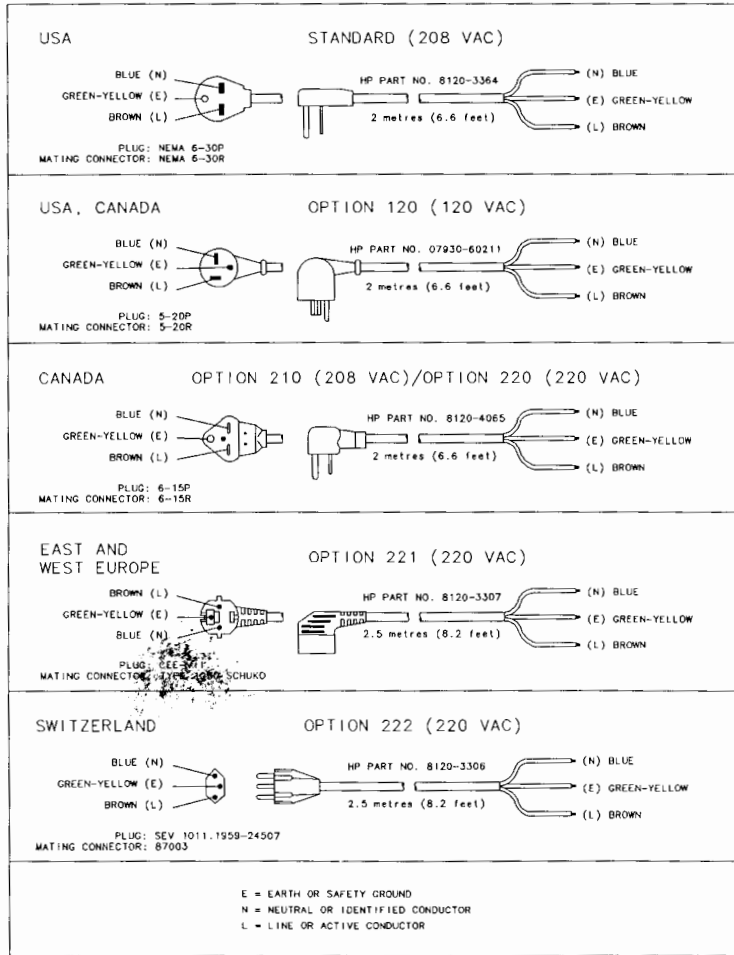


Figure A-2. HP 7933/7935 Power Cords

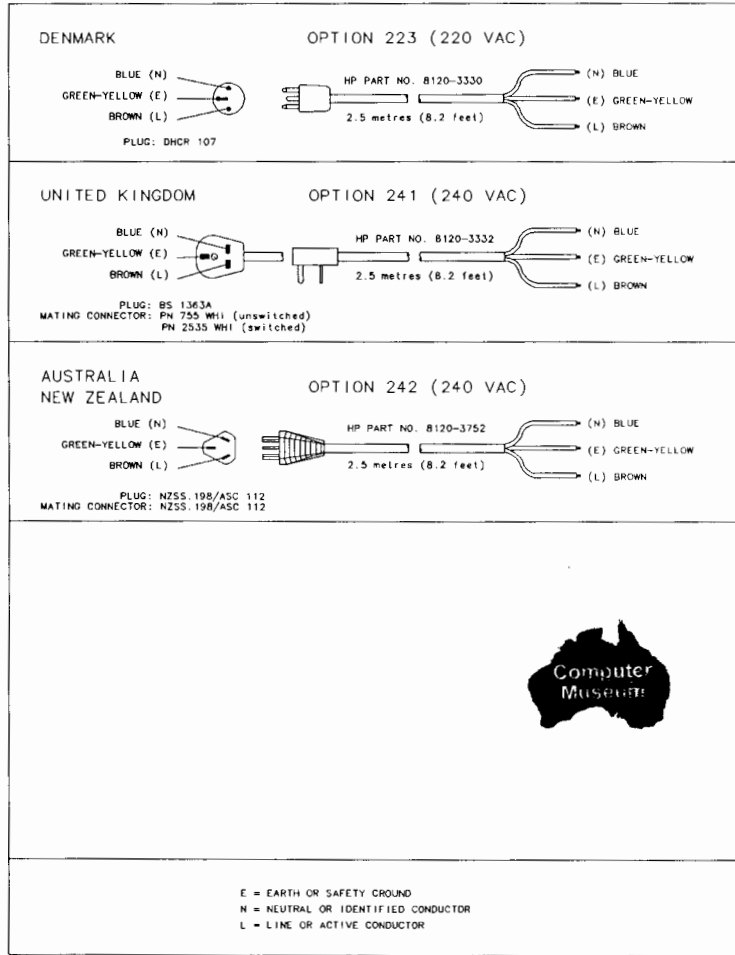


Figure A-2. HP 7933/7935 Power Cords (continued)

HP 97935A Media Module Specifications

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	10°C to 40°C (50°F to 104°F)
Nonoperating range:	-40°C to 65°C (-40°F to 149°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	8% to 80% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))
Nonoperating:	8% to 80% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))

Note

The media module should not be installed if there are signs of moisture condensation in or on the media module.

VIBRATION

Operating: (See figure 2-1)	Random vibration with power spectral density (PSD) of 0.000025 g ² /Hz from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of 0.00025 g ² /Hz from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of 0.000025 g ² /Hz from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of 0.0000125 g ² /Hz at 2500 Hz.
Nonoperating: (See figure 2-2)	Random vibration with power spectral density (PSD) of 0.0005 g ² /Hz from 10 to 2000 Hz.

SHOCK¹

Operating: 2 g maximum at 11 ms, half sine waveform
Nonoperating: 30 g maximum at 11 ms, half sine waveform

¹*In decreasing order of severity, the effects of excessive shock on the media module are head crash, premature failure of spindle and actuator, or error rate.*

ALTITUDE

Operating: maximum 3,000 m (9,840 ft)
Nonoperating: maximum 15,000 m (49,200 ft)

HP 7941A and 7945A Disk Drives Specifications

OPERATING SPECIFICATIONS

Note

The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	10.1 ms
Average seek time (including settling):	30 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kilobyte: (at 625 kilobytes/sec)	2 ms
Total average transaction time: (excluding system overhead)	50.4 ms
Disk performance index:	20 I/Os per second ¹

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

HP 7941A, 7945A

FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	8,129	32		
Surface	7,929,856	30,976	968	1
HP 7941A	23,789,568	92,928	2,904	3
HP 7945A	55,508,992	216,832	6,776	7

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height	130 mm (5.1 in.)
Width:	325 mm (12.8 in.)
Depth:	285 mm (11.2 in.)

WEIGHT

Net:	9.9 kg (21.8 lb)
Shipping:	12.9 kg (28.5 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum: 85 W (290 Btu/hr; 73 kcals/hr)
Typical: 65 W (222 Btu/hr; 56 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level B computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):
115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

HP 7941A, 7945A

Frequency:	47.5 to 66 Hz
Maximum Power:	115 V setting; 85 W (90 V, 60 Hz) 230 V setting; 85 W (198 V, 50 Hz)
Typical Power:	115 V setting; 65 W (115 V, 60 Hz) 230 V setting; 65 W (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 1.6 A (true rms at 90 V, 60 Hz) 230 V setting; 1.0 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 0.8 A (true rms at 115 V, 60 Hz) 230 V setting; 0.5 A (true rms at 230 V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	41 dB(A)
Sound power level (L_{wA}):	52 dB(A)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 45°C (41°F to 113°F)
Nonoperating range:	-40°C to 60°C (-40°F to 140°F)
Maximum rate of change:	10°C (18°F) per hour

HUMIDITY

Operating:	8% to 80% relative humidity, noncondensing (wet bulb temp. not to exceed 29°C (84°F))
Nonoperating:	5% to 90% relative humidity, noncondensing (wet bulb temp. not to exceed 29°C (84°F))

VIBRATION

Operating:
(See figure 2-3) Random vibration with power spectral density (PSD) of $0.0001 \text{ g}^2/\text{Hz}$ from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.00005 \text{ g}^2/\text{Hz}$ at 500 Hz.

Nonoperating:
(See figure 2-4) Random vibration with power spectral density (PSD) of $0.015 \text{ g}^2/\text{Hz}$ from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of $0.008 \text{ g}^2/\text{Hz}$ from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.0039 \text{ g}^2/\text{Hz}$ at 500 Hz.

SHOCK

Recommended operating range: <0.5 g
Operating: 1.5 g maximum at 11 ms, half sine waveform
Nonoperating: 20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating: maximum 4,600 m (15,000 ft)
Nonoperating: maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE**Radiated (14 kHz to 1 GHz):****Recommended operating limit:** <0.5 V/m

Operating limit: <3 V/m

Conducted (30 Hz to 50 kHz):**Recommended operating limit:** <1 V rms

Operating limit: <3 V rms

Conducted (50 kHz to 400 MHz):**Recommended operating limit:** <0.5 V rms

Operating limit: <1 V rms

Electrostatic Discharge:**Recommended operating limit:** <5 kV

Operating limit: <15 kV

Magnetic:

<4 gauss, 47.5 to 198 Hz

Power line transients (per IEEE Standard P587.1/F):**Oscillatory wave (100 kHz ringing wave):****Recommended operating limit:** <500 V (open circuit voltage)

Operating limit: <1.5 kV (open circuit voltage)

Unidirectional wave (one 20 μ s wide pulse):**Recommended operating limit:** <500 V (open circuit voltage)

Operating limit: <1 kV (open circuit voltage)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltages (true rms):

115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230 V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

Frequency: 47.5-66 Hz

Maximum Power: 115 V setting; 144 VA (90 V, 60 Hz)
230 V setting; 198 VA (200 V, 50 Hz)

Typical Power: 115 V setting; 92 VA (115 V, 60 Hz)
230 V setting; 115 VA (230 V, 50 Hz)

Maximum Current: 115 V setting; 1.6 A (true rms at 90 V, 60 Hz)
(occurs during spin-up) 230 V setting; 1.0 A (true rms at 180 V, 50 Hz)

Typical Current: 115 V setting; 0.8 A (true rms at 115 V, 60 Hz)
230 V setting; 0.5 A (true rms at 230 V, 50 Hz)

Distortion: <5% flat-topped harmonic distortion

Line Surge and Sag:

Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec

Line Dropout: Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.



HP 7942A and 7946A Disk Drives Specifications

OPERATING SPECIFICATIONS

Note



The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

DISK DRIVE PERFORMANCE

Average controller overhead time:	10.1 ms
Average seek time (including settling):	30 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kilobyte: (at 625 kilobytes/sec)	2 ms
Total average transaction time: (excluding system overhead)	50.4 ms
Disk performance index:	20 I/Os per second ¹

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

TAPE DRIVE PERFORMANCE

Read/write tape speed: 152.4 cm/s (60 in./s)
 Search/rewind tape speed: 228.2 cm/s (90 in./s)
 Maximum sustained transfer rate: 34 kilobyte/s¹

¹ *Maximum sustained transfer rate does not necessarily reflect system throughput, which varies depending upon application, file structures, and driver implementation.*

DISK DRIVE FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	8,129	32		
Surface	7,929,856	30,976	968	1
HP 7941A	23,789,568	92,928	2,904	3
HP 7945A	55,508,992	216,832	6,776	7

TAPE DRIVE FORMATTED CAPACITY

Item	Data Bytes Per	Words Per	Blocks Per	Tracks Per
Word	2	1		
Block	1,024	512		
Track:				
150 ft	1,046,578	523,264	1,022	
600 ft	4,186,112	2,093,056	4,088	
Cartridge:				
150 ft	16,744,448	8,372,224	16,352	16
600 ft	66,977,792	33,488,896	65,408	16

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height	208 mm (8.19 in.)
Width:	325 mm (12.8 in.)
Depth:	285 mm (11.2 in.)

WEIGHT

Net:	15.8 kg (34.8 lb)
Shipping:	19.6 kg (43.3 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum: 125 W (427 Btu/hr; 109 kcals/hr)
Typical: 120 W (410 Btu/hr; 103 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices.
- For Europe, designed to meet VDE 0871 for Level B computing devices. FTZ licensed on some HP systems. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):
115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

HP 7942A, 7946A

Frequency:	47.5 to 66 Hz
Maximum Power:	115 V setting; 125 W (100 V, 60 Hz) 230 V setting; 125 W (264 V, 50 Hz)
Typical Power:	115 V setting; 120 W (115 V, 60 Hz) 230 V setting; 120 W (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 2.3 A (true rms at 90 V, 60 Hz) 230 V setting; 1.3 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 1.50 A (true rms at 115 V, 60 Hz) 230 V setting; 0.80 A (true rms at 230 V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	40 dB(A)
Sound power level (L_{wA}):	52 dB(A)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

A-72 Product Specifications

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE



Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 40°C (41°F to 104°F)
Nonoperating range:	-40°C to 60°C (-40°F to 140°F)
Maximum rate of change:	10°C (18°F) per hour

HUMIDITY

Operating:	20% to 80% relative humidity, noncondensing (wet bulb temp. not to exceed 29°C (84°F))
Nonoperating:	5% to 95% relative humidity, noncondensing (wet bulb temp. not to exceed 29°C (84°F))

VIBRATION

Operating: (See figure 2-1)	Random vibration with power spectral density (PSD) of 0.000025 g ² /Hz from 5 to 10 Hz; 7.5 dB/octave from 10 to 25 Hz; PSD of 0.00025 g ² /Hz from 25 to 30 Hz; -24 dB/octave from 30 to 40 Hz; PSD of 0.000025 g ² /Hz from 40 to 2000 Hz; -9.3 dB/octave from 2000 to 2500 Hz; PSD of 0.0000125 g ² /Hz at 2500 Hz.
Nonoperating: (See figure 2-2)	Random vibration with power spectral density (PSD) of 0.0005 g ² /Hz from 10 to 2000 Hz.

SHOCK

Recommended operating range:	<0.5 g
Operating:	1.5 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4,600 m (15,000 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):

Recommended operating limit: <0.5 V/m

Operating limit: <3 V/m

Conducted (30 Hz to 50 kHz):

Recommended operating limit: <1 V rms

Operating limit: <3 V rms

Conducted (50 kHz to 400 MHz):

Recommended operating limit: <0.5 V rms

Operating limit: <1 V rms

Electrostatic Discharge:

Recommended operating limit: <5 kV

Operating limit: <15 kV

Magnetic:

<4 gauss, 47.5 to 198 Hz

Power line transients (per IEEE Standard P587.1/F):

Oscillatory wave (100 kHz ringing wave):

Recommended operating limit: <500 V (open circuit voltage)

Operating limit: <1.5 kV (open circuit voltage)

Unidirectional wave (one 20 μ s wide pulse):**Recommended operating limit:** <500 V (open circuit voltage)

Operating limit: <1 kV (open circuit voltage)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltages (true rms):

115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230 V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

Frequency: 47.5-66 Hz

Maximum Power: 115 V setting; 207 VA (90 V, 60 Hz)
230 V setting; 234 VA (200 V, 50 Hz)

Typical Power: 115 V setting; 173 VA (115 V, 60 Hz)
230 V setting; 184 VA (230 V, 50 Hz)

Maximum Current: 115 V setting; 2.3 A (true rms at 90 V, 60 Hz)
(occurs during spin-up) 230 V setting; 1.3 A (true rms at 180 V, 50 Hz)

Typical Current: 115 V setting; 1.50 A (true rms at 115 V, 60 Hz)
230 V setting; 0.80 A (true rms at 230 V, 50 Hz)

Distortion: <5% flat-topped harmonic distortion

Line Surge and Sag:
Transparent surge: 120% nominal line voltage for 0.5 sec
Recoverable surge/sag: 115 V setting; 70% and 130% typical
(per MIL-T-28800) line voltage for 0.5 sec

Line Dropout: Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.

HP 7957A and 7958A Disk Drives Specifications

OPERATING SPECIFICATIONS

Note



The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	3.0 ms
Average seek time (including settling):	29 ms
Average rotational delay:	8.3 ms
Average time to transfer 1 kilobyte: (at 853 kilobytes/sec)	1.2 ms

Total average transaction time: (excluding system overhead)	41.5 ms
----------------------------------------------------------------	---------

Disk performance index:	24.1 I/Os per second ¹
-------------------------	-----------------------------------

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,128	63		
Surface	16,337,664	63,819	1,013	1
HP 7957A	81,688,320	319,095	5,065	5
HP 7958A	130,701,312	510,552	8,104	8

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height	132 mm (5.2 in.)
Width:	325 mm (12.8 in.)
Depth:	285 mm (11.2 in.)

WEIGHT

Net:	
Standard:	9.9 kg (21.8 lb)
Shipping:	
Standard:	12.9 kg (28.5 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:	85 W (290 Btu/hr; 73 kcals/hr)
Typical:	65 W (222 Btu/hr; 56 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices. These products comply with the limits for a Class B computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

Magnetic nonoperating:	<2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating:	<5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):	
115 V setting:	100 V, 115 V, 120 V, single phase (inclusive tolerance range is 90 V to 132 V)
230V setting:	220 V, 240 V, single phase (inclusive tolerance range is 180 V to 264 V)

Frequency:	47.5 to 66 Hz
Maximum Power:	115 V setting; 85 W (90 V, 60 Hz) 230 V setting; 85 W (198 V, 50 Hz)
Typical Power:	115 V setting; 65 W (115 V, 60 Hz) 230 V setting; 65 W (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 1.6 A (true rms at 90 V, 60 Hz) 230 V setting; 1.0 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 0.8 A (true rms at 115 V, 60 Hz) 230 V setting; 0.5 A (true rms at 230 V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	41 dB(A)
Sound power level (L_{wA}):	52 dB(A) maximum

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS**Note**

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 45°C (41°F to 113°F)
Nonoperating range:	-40°C to 65°C (-40°F to 149°F)
Maximum rate of change:	10°C (18°F) per hour

HUMIDITY

Operating:	8% to 90% relative humidity, noncondensing (wet bulb temp. not to exceed 29°C (84°F))
Nonoperating:	8% to 90% relative humidity, noncondensing (wet bulb temp. not to exceed 29°C (84°F))

VIBRATION

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of $0.0001 \text{ g}^2/\text{Hz}$ from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.00005 \text{ g}^2/\text{Hz}$ at 500 Hz.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of $0.015 \text{ g}^2/\text{Hz}$ from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of $0.008 \text{ g}^2/\text{Hz}$ from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.0039 \text{ g}^2/\text{Hz}$ at 500 Hz.

SHOCK

Recommended operating range:	<0.67 g
Operating:	2 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4,500 m (14,800 ft)
Nonoperating:	maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms
Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V rms
Operating limit:	<1 V rms
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<15 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 50 μ s wide pulse):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)
Fast rise time transients:	
Recommended operating limit:	<500 V (into 50 Ω load)
Operating limit:	<1 kV (into 50 Ω load)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltages (true rms):

115 V setting:	100 V, 115 V, 120 V, single phase (inclusive tolerance range is 90 V to 132 V)
230 V setting:	220 V, 240 V, single phase (inclusive tolerance range is 180 V to 264 V)

Frequency: 47.5-66 Hz

Maximum Power: 115 V setting; 184 VA (90 V, 60 Hz)
230 V setting; 230 VA (200 V, 50 Hz)

Typical Power: 115 V setting; 92 VA (115 V, 60 Hz)
230 V setting; 115 VA (230 V, 50 Hz)

Maximum Current: 115 V setting; 1.6 A (true rms at 90 V, 60 Hz)
(occurs during spin-up) 230 V setting; 1.0 A (true rms at 180 V, 50 Hz)

Typical Current: 115 V setting; 0.8 A (true rms at 115 V, 60 Hz)
230 V setting; 0.5 A (true rms at 230 V, 50 Hz)

Distortion: <5% flat-topped harmonic distortion

HP 7957A, 7958A

Line Surge and Sag:

Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec

Line Dropout: Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.



HP 7936H/37H, 7936XP/37XP, and 7936FL/37FL Disk Drives Specifications

OPERATING SPECIFICATIONS

Note


The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.



FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	31,488	123		
Surface	43,957,248	171,708	1,396	1
HP 7936	307,700,736	1,201,956	9,772	7
HP 7937	571,444,224	2,232,204	18,148	13

PERFORMANCE

	H- MODEL	FL- MODEL	XP- MODEL
Average controller overhead:	<1.0 ms	<1.4 ms	<1.2 ms
Average seek time:	20.5 ms	20.5 ms	20.5 ms
Average rotational delay ($\pm 10\%$):	8.3 ms	8.3 ms	8.3 ms
Average time to transfer 1 kilobyte: (at 1 megabyte/sec)	1.0 ms	0.54 ms	1.0 ms
Controller cache impact ¹ :	0 ms	0 ms	-15.8 ms
Total average transaction time: (excluding system overhead)	30.8 ms	30.74 ms	15.2 ms
Disk performance index: (in I/Os per second ²)	32.5	35.2	66.0

¹ The reduction in time is due to the reduced number of seeks required for a disk drive with controller cache. The actual performance improvement on a drive will vary, depending on the read hit rate and the read percentage; the listed values are based on a read hit rate of 70% and a read percentage of 70-75%. Hit rate is defined as the number of times the drive finds information in cache divided by the number of times the information is requested from the drive.

² Average disk transactions per second. Refers to fundamental disk performance; actual I/O rates are application dependent and must take into account system overhead, the system configuration, and the locality of data on the disk. The read hit rate and the read percentage will also have a significant impact on performance of the XP-model drive.

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height:	271.6 mm (10.69 in.)
Width:	324.2 mm (12.76 in.)
Depth:	740.7 mm (29.16 in.)

WEIGHT

Net:	
Standard:	56.7 kg (125 lb)
Shipping:	
Standard:	74.4 kg (164 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:	350 W (1194 Btu/hr; 300 kcals/hr)
Typical:	320 W (1092 Btu/hr; 275 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices. These products comply with the limits for a Class B computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):

115 V setting: 100 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230V setting: 200 V, 208 V, 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

Frequency: 48 to 52 Hz; 58 to 62 Hz

Maximum Power: 115 V setting; 350 W (120 V, 60 Hz)
230 V setting; 350 W (240 V, 50 Hz)

Typical Power: 115 V setting; 320 W (120 V, 60 Hz)
230 V setting; 320 W (240 V, 50 Hz)

HP 7936H/37H, 7936XP/37XP, 7936FL/37FL

Maximum Current: 115 V setting; 9.5 A (true rms at 90 V, 50 Hz)
(occurs for 9 sec. during 230 V setting; 4.5 A (true rms at 180 V, 50 Hz)
spin-up)

Typical Current: 115 V setting; 3.6 A (true rms at 90 V, 60 Hz)
115 V setting; 3.35 A (true rms at 100 V, 60 Hz)
115 V setting; 3.05 A (true rms at 120 V, 50 Hz)
115 V setting; 3.0 A (true rms at 120 V, 60 Hz)
230 V setting; 1.65 A (true rms at 180 V, 60 Hz)
230 V setting; 1.6 A (true rms at 200 V, 60 Hz)
230 V setting; 1.5 A (true rms at 208 V, 60 Hz)
230 V setting; 1.5 A (true rms at 220 V, 60 Hz)
230 V setting; 1.5 A (true rms at 240 V, 50 Hz)
230 V setting; 1.5 A (true rms at 240 V, 60 Hz)

Line Dropout: No effect on performance; no operator intervention
required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

(Measured outside cabinet)

Average sound pressure level (L_{pA}): <55 dB(A)
Sound power level (L_{wA}): <68 dB(A) maximum

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	0°C to 55°C (32°F to 131°F)
Nonoperating range:	-40°C to 70°C (-40°F to 158°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	5% to 95% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))
Nonoperating:	5% to 95% relative humidity, noncondensing

Note



Allow a minimum of 4 hours for temperature/humidity stabilization before operating the product when moving from one climate extreme to another.



VIBRATION

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g ² /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz in any direction.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g ² /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g ² /Hz from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; sine vibration acceleration level of 0.56, 5 to 500 Hz.

SHOCK

Recommended operating range: <0.67 g

Operating: 2 g maximum at 11 ms, half sine waveform.
This product will operate with no operator intervention through a 1-inch tilt drop about any of its base edges on a hard surface.

Nonoperating: This product will survive a 4-inch drop about any of its base edges on a hard surface.

ALTITUDE

Operating: maximum 4,572 m (15,000 ft)

Nonoperating: maximum 15,000 m (49,200 ft)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):

Recommended operating limit: <0.5 V/m

Operating limit: <3 V/m

Conducted (30 Hz to 50 kHz):

Recommended operating limit: <1 V rms

Operating limit: <3 V rms

Conducted (50 kHz to 400 MHz):

Recommended operating limit: <0.5 V rms

Operating limit: <1 V rms

A-94 Product Specifications

HP 7936H/37H, 7936XP/37XP, 7936FL/37FL

Electrostatic Discharge:

Recommended operating limit: <5 kV
Operating limit: <15 kV

Magnetic: <4 gauss, 47.5 to 198 Hz

Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):

Oscillatory wave (100 kHz ringing wave):

Recommended operating limit: <1.0 kV (open circuit voltage)
Operating limit: <3.0 kV (open circuit voltage)

Unidirectional wave (one 50 μ s wide pulse):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <1 kV (open circuit voltage)

Fast rise time transients:

Recommended operating limit: <500 V (into 50 Ω load)
Operating limit: <1.0 kV (into 50 Ω load)

COOLING REQUIREMENTS

Allow a minimum of 152 mm (6 in.) in front and behind for adequate air flow.

POWER REQUIREMENTS

Voltages (true rms):

115 V setting: 100 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230V setting: 200 V, 208 V, 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

HP 7936H/37H, 7936XP/37XP, 7936FL/37FL

Frequency:	48 to 52 Hz; 58 to 62 Hz
Maximum Power:	115 V setting; 184 VA (90 V, 60 Hz) 230 V setting; 230 VA (200 V, 50 Hz)
Typical Power:	115 V setting; 92 VA (115 V, 60 Hz) 230 V setting; 115 VA (230 V, 50 Hz)
Maximum Current: (occurs for 9 sec during spin-up)	115 V setting; 9.5 A (true rms at 90 V, 50 Hz) 230 V setting; 4.5 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 3.0 A (true rms at 120 V, 60 Hz) 230 V setting; 1.65 A (true rms at 180 V, 60 Hz)
Distortion:	<5% flat-topped harmonic distortion
Line Surge and Sag:	
Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec
Line Dropout:	Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 10 degrees of parallel to the horizon.

HP 19514A Cabinet Specifications

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height:	160 cm (63.0 in.)
Width:	90 cm (35.4 in.)
Depth:	82.5 cm (32.5 in.)

WEIGHT

Net:	
Cabinet:	180.0 kg (397 lb)
PDU:	36.1 kg (79.6 lb)
Disk Drives (8):	455 kg (1003 lb)
Total:	671.1 kg (1480 lb)
Shipping:	
Cabinet and PDU:	262 kg (589 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:	2600 W (8874 Btu/hr; 2236 kcals/hr)
----------	-------------------------------------

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices. These products comply with the limits for a Class B computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

POWER CHARACTERISTICS

Voltage (nominal):	200/208 V, 220/230 V, 240 V \pm 10%
Frequency:	50, 60 Hz \pm 2 Hz
Inrush Current*:	
Transformer inrush:	150 A for 2 ms (264 v)
Power supply inrush:	88 A for 2 cycles (264 v)
Motor spin-up inrush:	33 A for 8 seconds (180 v)
Minimum Steady-State Current*:	9.8 A (200 V, 60 Hz)
(no drives seeking)	9.5 A (208 V, 60 Hz)
	9.1 A (220 V, 60 Hz)
	8.7 A (240 V, 60 Hz)

Maximum Steady-State Current*:	16.0 A (200 V, 60 Hz)
(all drives seeking)	15.4 A (208 V, 60 Hz)
	14.6 A (220 V, 60 Hz)
	13.4 A (240 V, 60 Hz)

**All current measurements reflect a cabinet fully loaded with eight drives.*

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}): <70 dB(A)

SAFETY

- Compliant to CSA 22.2 No. 220
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 40°C (41°F to 104°F)
Nonoperating range:	-40°C to 70°C (-40°F to 158°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	5% to 95% relative humidity, noncondensing (wet bulb temp. not to exceed 25.6°C (78°F))
Nonoperating:	5% to 95% relative humidity, noncondensing

Note

Allow a minimum of 4 hours for temperature/humidity stabilization before operating the product when moving from one climate extreme to another.

VIBRATION (Vertical Axis Only)

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g ² /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz (~0.21 g rms), 30 minute duration.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g ² /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 150 Hz; then constant 150 to 350 Hz; -6 dB/octave from 350 to 500 Hz (~1.76 g rms), 10 minute duration.

SHOCK

Recommended operating range:	<0.67 g
Operating:	4 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating: maximum 4,572 m (15,000 ft)
Nonoperating: maximum 15,240 m (50,000 ft)
Maximum rate of change: <5,000 ft/minute (1,524 m/minute)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):

Recommended operating limit: <0.5 V/m
Operating limit: <3 V/m

Conducted (30 Hz to 50 kHz):

Recommended operating limit: <1 V rms
Operating limit: <3 V rms

Conducted (50 kHz to 400 MHz):

Recommended operating limit: <0.5 V rms
Operating limit: <1 V rms

Electrostatic Discharge:

Recommended operating limit: <7.5 kV
Operating limit: <15 kV

Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):

Oscillatory wave (100 kHz ringing wave):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <3 kV (open circuit voltage)

Unidirectional wave (one 50 μ s wide pulse):

Recommended operating limit: <500 V (open circuit voltage)
Operating limit: <1 kV (open circuit voltage)

Fast rise time transients:

Recommended operating limit: <500 V (into 50 Ω load)
Operating limit: <1 kV (into 50 Ω load)



VENTILATION

The rear of the cabinet must be a minimum of 61 cm (2 ft) from any solid surface to provide adequate ventilation. There are no special air conditioning requirements other than what may be required to maintain the specified temperature.

FLOOR LOADING

The fully loaded cabinet asserts a maximum floor load of 200 lbs per square foot and a maximum point load of 500 lbs. The location of the loaded cabinet should be verified against these numbers to ensure a safe installation.

POWER CORDS

The cabinet power cord and connector requirements are shown in figure A-3.

WALL CIRCUIT BREAKER REQUIREMENTS

When choosing wall circuit breaker for this installation refer to figure A-4. Trip characteristics for the wall circuit breaker and/or power conditioner must meet or exceed the supplied circuit breaker curve shown in figure A-4.

TRANSPORTATION SPECIFICATIONS

The transportation specifications assume that the cabinet is packaged and mounted on a pallet.

Warning



Following installation of the drives, the cabinet may be moved short distances on its casters for proper positioning. However, do not move a loaded cabinet long distances over rough surfaces or down an incline.

Impact:	The package will survive a vertical drop from 30 cm (12 inches) on the flat base. The package will survive four rotational edge drops from 30 cm (12 inches) or up to maximum height before tipover, whichever is less.
Swept Sine Vertical Vibration:	0.5 g (0 to peak) from 5 to 200 to 5 Hz resonant search; 1 octave per minute sweep rate; 5 minute resonant dwell at the package resonance.
Random Vertical Vibration:	Random vibration with power spectral density (PSD) of $0.015 \text{ g}^2/\text{Hz}$ from 5 to 100 Hz; -6 dB/octave from 100 to 200 Hz ($\sim 1.57\text{g RMS}$); 30 minute duration.

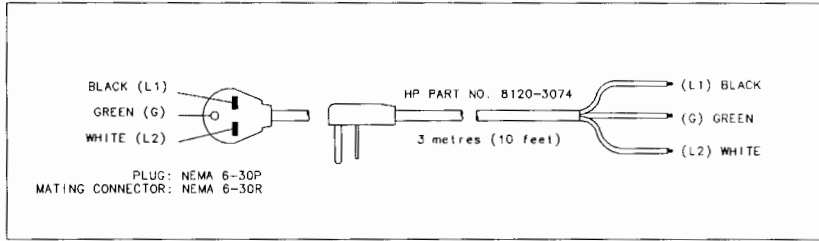


Figure A-3. PDU Power Cord

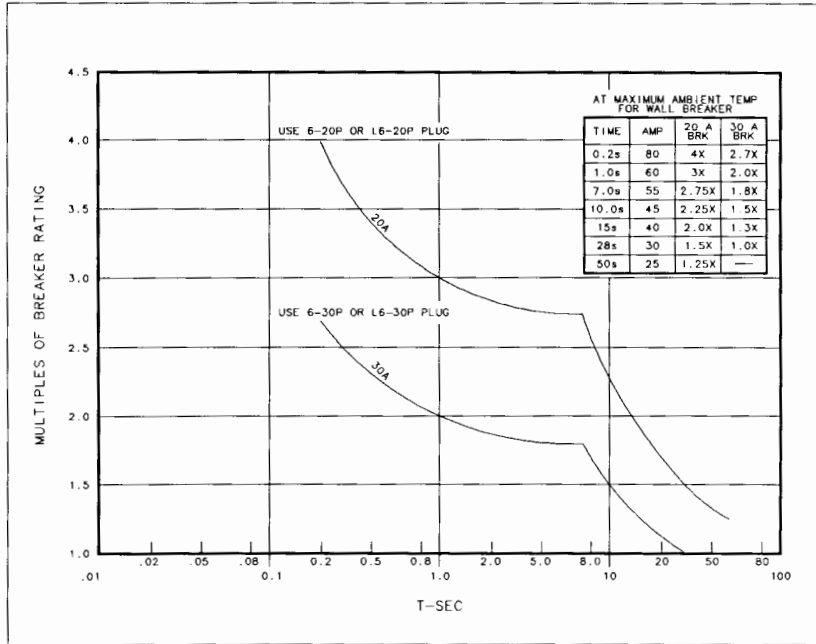


Figure A-4. Wall Breaker Trip Requirements

HP 7957B, 7958B, and 7959B Disk Drives Specifications**OPERATING SPECIFICATIONS**

Note

The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	<1.0 ms
Average seek time (including settling):	17 ms
Average rotational delay:	8.96 ms \pm 1%
Average time to transfer 1 kilobyte: (at 700 kilobytes/sec)	1.4 ms
Total average transaction time: (excluding system overhead)	28.36 ms
Disk performance index:	35.3 I/Os per second ¹

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

HP 7957B, 7958B, 7959B

FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,128	63		
Surface: 7957B	20,466,432	79,947	1,269	1
7958B/59B	25,353,216	99,036	1,572	1
HP 7957B	81,865,728	319,788	5,076	4
HP 7958B	152,119,296	594,216	9,432	6
HP 7959B	304,238,592	1,188,432	18,864	12

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height (with cabinet feet):	132 mm (5.2 in.)
Height (without cabinet feet):	129 mm (5.1 in.)
Width:	325 mm (12.8 in.)
Depth:	285 mm (11.2 in.)

WEIGHT

Net:	
Standard:	10.6 kg (23.2 lb)
Shipping:	
Standard:	13.6 kg (29.9 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum: 85 W (290 Btu/hr; 73 kcals/hr)
Typical: 65 W (222 Btu/hr; 56 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices. These products comply with the limits for a Class B computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):
115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

HP 7957B, 7958B, 7959B

Frequency:	47.5 to 66 Hz
Maximum Power:	115 V setting; 85 W (90 V, 60 Hz) 230 V setting; 85 W (198 V, 50 Hz)
Typical Power:	115 V setting; 65 W (115 V, 60 Hz) 230 V setting; 65 W (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 1.8 A (true rms at 90 V, 60 Hz) 230 V setting; 1.2 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 1.0 A (true rms at 115 V, 60 Hz) 230 V setting; 0.6 A (true rms at 230 V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	41 dB(A)
Sound power level (L_{wA}):	54 dB(A) maximum

SAFETY

- CSA certified to CSA 22.2 No. 154 and CSA 22.2 No. 220
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 45°C (41°F to 113°F)
Nonoperating range:	-40°C to 65°C (-40°F to 149°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	8% to 80% relative humidity, noncondensing
Nonoperating:	5% to 80% relative humidity, noncondensing

VIBRATION

Operating:
(See figure 2-3)

Random vibration with power spectral density (PSD) of $0.0001 \text{ g}^2/\text{Hz}$ from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.00005 \text{ g}^2/\text{Hz}$ at 500 Hz with no performance degradation beyond 10%, no damage and no operator intervention required.

Nonoperating:
(See figure 2-4)

Random vibration with power spectral density (PSD) of $0.015 \text{ g}^2/\text{Hz}$ from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of $0.008 \text{ g}^2/\text{Hz}$ from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.0039 \text{ g}^2/\text{Hz}$ at 500 Hz.

SHOCK

Recommended operating range: <1 g

Operating: 4 g maximum at 11 ms, half sine waveform

Nonoperating: 20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating: maximum 4,572 m (15,000 ft)

Nonoperating: maximum 15,240 m (50,000 ft)

Maximum rate of change: <5,000 ft/minute (1,524 m/minute)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):

Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m



Conducted (30 Hz to 50 kHz):

Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms

Conducted (50 kHz to 400 MHz):

Recommended operating limit:	<0.5 V rms
Operating limit:	<1 V rms

Electrostatic Discharge:

Recommended operating limit:	<5 kV
Operating limit:	<15 kV

Magnetic:

<4 gauss, 47.5 to 198 Hz

Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):

Oscillatory wave (100 kHz ringing wave):

Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)

Unidirectional wave (one 50 μ s wide pulse):

Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)

Fast rise time transients:

Recommended operating limit:	<500 V (into 50 Ω load)
Operating limit:	<1 kV (into 50 Ω load)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltages (true rms):

115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230 V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

Frequency: 47.5-66 Hz

Maximum Power: 115 V setting; 184 VA (90 V, 60 Hz)
230 V setting; 230 VA (200 V, 50 Hz)

Typical Power: 115 V setting; 92 VA (115 V, 60 Hz)
230 V setting; 115 VA (230 V, 50 Hz)

Maximum Current: 115 V setting; 1.8 A (true rms at 90 V, 60 Hz)
(occurs during spin-up) 230 V setting; 1.2 A (true rms at 180 V, 50 Hz)

Typical Current: 115 V setting; 1.00 A (true rms at 115 V, 60 Hz)
230 V setting; 0.6 A (true rms at 230 V, 50 Hz)

Distortion: <5% flat-topped harmonic distortion

Line Surge and Sag:

Transparent surge: 120% nominal line voltage for 0.5 sec
Recoverable surge/sag: 115 V setting; 70% and 130% typical
(per MIL-T-28800) line voltage for 0.5 sec

Line Dropout: Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.

HP 7957S, 7958S, and 7959S Disk Drives Specifications

OPERATING SPECIFICATIONS

Note



The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	<1.0 ms
Average seek time (including settling):	17 ms
Average rotational delay:	8.96 ms \pm 1%
Average time to transfer 1 kilobyte: (at 700 kilobytes/sec)	1.4 ms

Total average transaction time: (excluding system overhead)	28.36 ms
----------------------------------------------------------------	----------

Disk performance index:	35.3 I/Os per second ¹
-------------------------	-----------------------------------

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,384	64		
Surface	26,918,912	105,152	1,643	1
HP 7957S	107,675,648	420,608	6,572	4
HP 7958S	161,513,472	630,912	9,858	6
HP 7959S	323,026,944	1,261,824	19,716	12

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height (with cabinet feet):	132 mm (5.2 in.)
Height (without cabinet feet):	129 mm (5.1 in.)
Width:	325 mm (12.8 in.)
Depth:	285 mm (11.2 in.)

WEIGHT

Net:	
Standard:	9.9 kg (21.8 lb)
Shipping:	
Standard:	12.9 kg (28.5 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:	60 W (205 Btu/hr; 52 kcals/hr)
Typical:	45 W (154 Btu/hr; 39 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices. These products comply with the limits for a Class B computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

Magnetic nonoperating:	<2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating:	<5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):	
115 V setting:	100 V, 115 V, 120 V, single phase (inclusive tolerance range is 90 V to 132 V)
230V setting:	220 V, 240 V, single phase (inclusive tolerance range is 180 V to 264 V)

Frequency:	47.5 to 66 Hz
Maximum Power:	115 V setting; 60 W (90 V, 60 Hz) 230 V setting; 60 W (198 V, 50 Hz)
Typical Power:	115 V setting; 45 W (115 V, 60 Hz) 230 V setting; 45 W (230 V, 50 Hz)
Maximum Current: (occurs during spin-up)	115 V setting; 1.0 A (true rms at 90 V, 60 Hz) 230 V setting; 0.6 A (true rms at 180 V, 50 Hz)
Typical Current:	115 V setting; 0.7 A (true rms at 115 V, 60 Hz) 230 V setting; 0.4 A (true rms at 230 V, 50 Hz)
Line Dropout:	No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.



ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	41 dB(A)
Sound power level (L_{wA}):	54 dB(A) maximum

SAFETY

- CSA certified to CSA 22.2 No. 154 and CSA 22.2 No. 220
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478
- Meets VDE 0730 Part II

ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range: 20°C to 25.5°C (68°F to 78°F)
Operating range: 5°C to 45°C (41°F to 113°F)
Nonoperating range: -40°C to 65°C (-40°F to 149°F)

Maximum rate of change: 20°C (36°F) per hour

HUMIDITY

Operating: 8% to 80% relative humidity, noncondensing
Nonoperating: 5% to 80% relative humidity, noncondensing

VIBRATION

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g ² /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.00005 g ² /Hz at 500 Hz with no performance degradation beyond 10%, no damage and no operator intervention required.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g ² /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g ² /Hz from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.0039 g ² /Hz at 500 Hz.

SHOCK

Recommended operating range:	<1 g
Operating:	2 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4,572 m (15,000 ft)
Nonoperating:	maximum 15,240 m (50,000 ft)
Maximum rate of change:	<5,000 ft/minute (1,524 m/minute)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms
Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V rms
Operating limit:	<1 V rms
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<15 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 50 μ s wide pulse):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1 kV (open circuit voltage)
Fast rise time transients:	
Recommended operating limit:	<500 V (into 50 Ω load)
Operating limit:	<1 kV (into 50 Ω load)

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltages (true rms):

115 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
230 V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 180 V to 264 V)

Frequency: 47.5-66 Hz

Maximum Power: 115 V setting; 120 VA (90 V, 60 Hz)
230 V setting; 138 VA (200 V, 50 Hz)

Typical Power: 115 V setting; 80 VA (115 V, 60 Hz)
230 V setting; 92 VA (230 V, 50 Hz)

Maximum Current: 115 V setting; 1.0 A (true rms at 90 V, 60 Hz)
(occurs during spin-up) 230 V setting; 0.6 A (true rms at 180 V, 50 Hz)

Typical Current: 115 V setting; 0.7 A (true rms at 115 V, 60 Hz)
230 V setting; 0.4 A (true rms at 230 V, 50 Hz)

Distortion: <5% flat-topped harmonic distortion

HP 7957S, 7958S, 7959S

Line Surge and Sag:

Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec

Line Dropout: Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.

HP 7961B, 7962B, and 7963B Disk Drives Specifications

OPERATING SPECIFICATIONS

Note



The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	<1.0 ms
Average seek time (including settling):	17 ms
Average rotational delay:	8.96 ms \pm 1%
Average time to transfer 1 kilobyte: (at 700 kilobytes/sec)	1.4 ms
Total average transaction time: (excluding system overhead)	28.36 ms
Disk performance index:	35.3 I/Os per second ¹

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

HP 7961B, 7962B, 7963B

FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,128	63		
Surface: 7961B	20,466,432	79,947	1,269	1
7962B/63B	25,353,216	99,036	1,572	1
HP 7961B	81,865,728	319,788	5,076	4
HP 7962B	152,119,296	594,216	9,432	6
HP 7963B	304,238,592	1,188,432	18,864	12

PHYSICAL CHARACTERISTICS

DIMENSIONS

Height (with cabinet feet):	132 mm (5.2 in.)
Height (without cabinet feet):	129 mm (5.1 in.)
Width:	325 mm (12.8 in.)
Depth:	554 mm (21.8 in.)

WEIGHT

Net:	
Package with one disk mechanism:	14.8 kg (32.7 lb)
Each additional disk mechanism :	3.6 kg (7.9 lb)
Shipping:	
Package with one disk mechanism:	19.1 kg (42.1 lb)

A-126 Product Specifications

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:

One disk mechanism:	73.5 W (251 Btu/hr; 63 kcals/hr)
Two disk mechanisms:	110.3 W (376 Btu/hr; 95 kcals/hr)
Three disk mechanisms:	147 W (502 Btu/hr; 126 kcals/hr)

Typical:

One disk mechanism:	65 W (222 Btu/hr; 56 kcals/hr)
Two disk mechanisms:	88.2 W (300 Btu/hr; 75 kcals/hr)
Three disk mechanisms:	118 W (401 Btu/hr; 100 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class B computing peripheral devices. These products comply with the limits for a Class B computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

Magnetic nonoperating:	<2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating:	<5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):

120 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
240V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 198 V to 264 V)

Frequency: 47.5 to 63 Hz

Maximum Power:

Three disk mechanisms: 120 V setting; 147 W (120 V, 60 Hz)
240 V setting; 145 W (240 V, 50 Hz)

Typical Power:

One disk mechanism: 120 V setting; 65 W (120 V, 60 Hz)
240 V setting; 65 W (240 V, 50 Hz)
Two disk mechanisms: 120 V setting; 88 W (120 V, 60 Hz)
240 V setting; 87 W (240 V, 50 Hz)
Three disk mechanisms: 120 V setting; 118 W (120 V, 60 Hz)
240 V setting; 116 W (240 V, 50 Hz)

Maximum Current: (occurs during spin-up)

Three disk mechanisms: 120 V setting; 2.45 A (true rms at 120 V, 60 Hz)
240 V setting; 1.36 A (true rms at 240 V, 50 Hz)

Typical Current:

One disk mechanism:	120 V setting; 1.00 A (true rms at 120 V, 60 Hz) 240 V setting; 0.60 A (true rms at 240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 1.47 A (true rms at 120 V, 60 Hz) 240 V setting; 0.82 A (true rms at 240 V, 50 Hz)
Three disk mechanisms:	120 V setting; 1.96 A (true rms at 120 V, 60 Hz) 240 V setting; 1.09 A (true rms at 240 V, 50 Hz)

Line Dropout: No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	41 dB(A)
Sound power level (L_{wA}):	55 dB(A) maximum

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478



ENVIRONMENTAL REQUIREMENTS

Note



The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range:	20°C to 25.5°C (68°F to 78°F)
Operating range:	5°C to 40°C (41°F to 104°F)
Nonoperating range:	-40°C to 65°C (-40°F to 149°F)
Maximum rate of change:	20°C (36°F) per hour

HUMIDITY

Operating:	8% to 80% relative humidity, noncondensing
Nonoperating:	5% to 80% relative humidity, noncondensing

VIBRATION

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of $0.0001 \text{ g}^2/\text{Hz}$ from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.00005 \text{ g}^2/\text{Hz}$ at 500 Hz with no performance degradation beyond 10%, no damage and no operator intervention required.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of $0.015 \text{ g}^2/\text{Hz}$ from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of $0.008 \text{ g}^2/\text{Hz}$ from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of $0.0039 \text{ g}^2/\text{Hz}$ at 500 Hz.

SHOCK

Recommended operating range:	<1 g
Operating:	2 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4 572 m (15,000 ft)
Nonoperating:	maximum 15 240 m (50,000 ft)
Maximum rate of change:	<5000 ft/minute (1 524 m/minute)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms
Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V rms
Operating limit:	<1 V rms
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<15 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 50 μ s wide pulse):	
Recommended operating limit:	<100 V (open circuit voltage)
Operating limit:	<250 V (open circuit voltage)
Fast rise time transients:	
Recommended operating limit:	<500 V (into 50 Ω load)
Operating limit:	<1 kV (into 50 Ω load)

**COOLING
REQUIREMENTS**

Allow 76.2 mm (3 in.) in front and behind for adequate air flow



POWER REQUIREMENTS

Voltages (true rms):

120 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)

240 V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 198 V to 264 V)

Frequency: 47.5-63 Hz

Maximum Power:

Three disk mechanisms: 120 V setting; 251 VA (120 V, 60 Hz)
240 V setting; 266 VA (240 V, 50 Hz)

Typical Power:

Three disk mechanisms: 120 V setting; 200 VA (120 V, 60 Hz)
240 V setting; 215 VA (240 V, 50 Hz)

Maximum Current: (occurs during spin-up)

Three disk mechanisms: 120 V setting; 2.45 A (true rms at 120 V, 60 Hz)
240 V setting; 1.36 A (true rms at 240 V, 50 Hz)

HP 7961B, 7962B, 7963B

Typical Current:

One disk mechanism:	120 V setting; 1.00 A (true rms at 120 V, 60 Hz) 240 V setting; 0.60 A (true rms at 240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 1.47 A (true rms at 120 V, 60 Hz) 240 V setting; 0.82 A (true rms at 240 V, 50 Hz)
Three disk mechanisms:	120 V setting; 1.96 A (true rms at 120 V, 60 Hz) 240 V setting; 1.09 A (true rms at 240 V, 50 Hz)

Distortion: <5% flat-topped harmonic distortion

Line Surge and Sag:

Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec

Line Dropout: Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.

HP 9262B and 9263B Disk Drives Specifications

OPERATING SPECIFICATIONS

Note

The following information stipulates the specifications and characteristics of this product when installed and operated within the limits specified under ENVIRONMENTAL REQUIREMENTS found elsewhere in this section.

PERFORMANCE

Average controller overhead time:	<1.0 ms
Average seek time (including settling):	17 ms
Average rotational delay:	8.96 ms \pm 1%
Average time to transfer 1 kilobyte: (at 700 kilobytes/sec)	1.4 ms
Total average transaction time: (excluding system overhead)	28.36 ms
Disk performance index:	35.3 I/Os per second ¹

¹ *Maximum disk transactions per second, for 1 kilobyte transfers, less system overhead. Refers to fundamental disk performance; true I/O rates are application dependent and must take into account system overhead, including the individual system configuration specifications.*

FORMATTED CAPACITY

Item	Data Bytes Per	Sectors Per	Tracks Per	Heads Per
Sector	256			
Track	16,128	63		
Surface	25,353,216	99,036	1,572	1
HP 9262B	152,119,296	594,216	9,432	6
HP 9263B	304,238,592	1,188,432	18,864	12

PHYSICAL CHARACTERISTICS

DIMENSIONS

Cabinet:

Height (with cabinet feet):	132 mm (5.2 in.)
Height (without cabinet feet):	129 mm (5.1 in.)
Width:	325 mm (12.8 in.)
Depth:	577 mm (22.7 in.)

Disk Mechanism:

Height:	88 mm (3.5 in.)
Width:	151 mm (6.0 in.)
Depth:	272 mm (10.7 in.)

Transit Case:

Height:	178 mm (7.0 in.)
Width:	419 mm (16.5 in.)
Depth:	297 mm (11.7 in.)

WEIGHT

Net:

Cabinet only:	12.5 kg (27.6 lb)
Cabinet with one disk mechanism:	17.1 kg (37.7 lb)
Cabinet with two disk mechanisms:	21.7 kg (47.8 lb)

Disk mechanism only:	4.6 kg (10.1 lb)
Disk mechanism in transit case:	6.4 kg (14.2 lb)

Shipping:

Cabinet only:	16.8 kg (37.0 lb)
Disk mechanism in transit case:	7.7 kg (17.0 lb)

OPERATING CHARACTERISTICS

HEAT DISSIPATION

Maximum:

One disk mechanism:	73.5 W (251 Btu/hr; 63 kcals/hr)
Two disk mechanisms:	110.3 W (376 Btu/hr; 95 kcals/hr)

Typical:

One disk mechanism:	65 W (222 Btu/hr; 56 kcals/hr)
Two disk mechanisms:	88.2 W (300 Btu/hr; 75 kcals/hr)

ELECTROMAGNETIC EMISSIONS

Radiated and conducted interference:

- For U.S.A., designed to meet FCC docket 20780 for Class A computing peripheral devices. These products comply with the limits for a Class A computing device pursuant to Subpart J of part 15 of the FCC Rules. See instructions if interference to radio reception is suspected.
- For Europe, designed to meet EMI level FTZ 1046/84 and provides a Manufacturer's Declaration. Refer to your local sales representative for more information.

Magnetic nonoperating: <2 milligauss at 2 m (7 ft) on all surfaces
Magnetic operating: <5 gauss on all surfaces

POWER CHARACTERISTICS

Voltages (true rms):
120 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)
240V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 198 V to 264 V)
Frequency: 47.5 to 63 Hz

Maximum Power:

One disk mechanism:	120 V setting; 81 W (120 V, 60 Hz) 240 V setting; 81 W (240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 110 W (120 V, 60 Hz) 240 V setting; 108 W (240 V, 50 Hz)

Typical Power:

One disk mechanism:	120 V setting; 65 W (120 V, 60 Hz) 240 V setting; 65 W (240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 88 W (120 V, 60 Hz) 240 V setting; 87 W (240 V, 50 Hz)

Maximum Current: (occurs during spin-up)

One disk mechanism:	120 V setting; 1.25 A (true rms at 120 V, 60 Hz) 240 V setting; 0.75 A (true rms at 240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 1.84 A (true rms at 120 V, 60 Hz) 240 V setting; 1.02 A (true rms at 240 V, 50 Hz)

Typical Current:

One disk mechanism:	120 V setting; 1.00 A (true rms at 120 V, 60 Hz) 240 V setting; 0.60 A (true rms at 240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 1.47 A (true rms at 120 V, 60 Hz) 240 V setting; 0.82 A (true rms at 240 V, 50 Hz)

Line Dropout:

No effect on performance; no operator intervention required for dropout equal to or less than 10 ms.

ACOUSTIC EMISSIONS

Average sound pressure level (L_{pA}):	41 dB(A)
Sound power level (L_{wA}):	< 54 dB(A) (One disk mechanism)

SAFETY

- CSA certified to CSA 22.2 No. 154
- Meets all applicable safety standards of IEC 380 and IEC 435
- UL listed to UL 114 and UL 478

ENVIRONMENTAL REQUIREMENTS

Note

The environmental specifications listed herein apply when this product is not connected to a Hewlett-Packard (HP) system. When this product is connected with HP systems, the more stringent environmental and performance specifications listed for any single HP device within the HP system are applicable and supersede these specifications.

The following specifications were type-tested under controlled conditions. Hewlett-Packard maintains an active program of auditing production products to ensure these specifications remain true when products are again tested under the same conditions. The limits of these specifications do not represent the optimum for long, trouble-free operation and are specifically not recommended for maximum customer satisfaction. The recommended conditions are stated separately where appropriate.

TEMPERATURE

Recommended operating range: 20°C to 25.5°C (68°F to 78°F)
Operating range: 5°C to 40°C (41°F to 104°F)
Nonoperating range: -40°C to 65°C (-40°F to 149°F)

Maximum rate of change: 20°C (36°F) per hour

HUMIDITY

Operating: 8% to 80% relative humidity, noncondensing
Nonoperating: 5% to 80% relative humidity, noncondensing

VIBRATION

Operating: (See figure 2-3)	Random vibration with power spectral density (PSD) of 0.0001 g ² /Hz from 5 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.00005 g ² /Hz at 500 Hz with no performance degradation beyond 10%, no damage and no operator intervention required.
Nonoperating: (See figure 2-4)	Random vibration with power spectral density (PSD) of 0.015 g ² /Hz from 5 to 100 Hz; -6 dB/octave from 100 to 137 Hz; PSD of 0.008 g ² /Hz from 137 to 350 Hz; -6 dB/octave from 350 to 500 Hz; PSD of 0.0039 g ² /Hz at 500 Hz.

SHOCK

Recommended operating range:	<1 g
Operating:	2 g maximum at 11 ms, half sine waveform
Nonoperating:	20 g maximum at 11 ms, half sine waveform

ALTITUDE

Operating:	maximum 4 572 m (15,000 ft)
Nonoperating:	maximum 15 240 m (50,000 ft)
Maximum rate of change:	<5000 ft/minute (1 524 m/minute)

ELECTROMAGNETIC SUSCEPTIBILITY OPERATING RANGE

Radiated (14 kHz to 1 GHz):	
Recommended operating limit:	<0.5 V/m
Operating limit:	<3 V/m
Conducted (30 Hz to 50 kHz):	
Recommended operating limit:	<1 V rms
Operating limit:	<3 V rms
Conducted (50 kHz to 400 MHz):	
Recommended operating limit:	<0.5 V rms
Operating limit:	<1 V rms
Electrostatic Discharge:	
Recommended operating limit:	<5 kV
Operating limit:	<15 kV
Magnetic:	<4 gauss, 47.5 to 198 Hz
Power line transients (Oscillatory wave and unidirectional wave tests per IEEE Standard P587.1/F):	
Oscillatory wave (100 kHz ringing wave):	
Recommended operating limit:	<500 V (open circuit voltage)
Operating limit:	<1.5 kV (open circuit voltage)
Unidirectional wave (one 50 μ s wide pulse):	
Recommended operating limit:	<100 V (open circuit voltage)
Operating limit:	<250 V (open circuit voltage)
Fast rise time transients:	
Recommended operating limit:	<500 V (into 50 Ω load)
Operating limit:	<1 kV (into 50 Ω load)

HP 9262B, 9263B

COOLING REQUIREMENTS

Allow 76.2 mm (3 in.) in front and behind for adequate air flow

POWER REQUIREMENTS

Voltages (true rms):

120 V setting: 100 V, 115 V, 120 V, single phase
(inclusive tolerance range is 90 V to 132 V)

240 V setting: 220 V, 240 V, single phase
(inclusive tolerance range is 198 V to 264 V)

Frequency: 47.5-63 Hz

Maximum Power:

One disk mechanism: 120 V setting; 128 VA (120 V, 60 Hz)
240 V setting; 147 VA (240 V, 50 Hz)

Two disk mechanisms: 120 V setting; 188 VA (120 V, 60 Hz)
240 V setting; 200 VA (240 V, 50 Hz)

Typical Power:

One disk mechanism: 120 V setting; 102 VA (120 V, 60 Hz)
240 V setting; 117 VA (240 V, 50 Hz)

Two disk mechanisms: 120 V setting; 151 VA (120 V, 60 Hz)
240 V setting; 160 VA (240 V, 50 Hz)

Maximum Current: (occurs during spin-up)

One disk mechanism: 120 V setting; 1.25 A (true rms at 120 V, 60 Hz)
240 V setting; 0.75 A (true rms at 240 V, 50 Hz)

Two disk mechanisms: 120 V setting; 1.84 A (true rms at 120 V, 60 Hz)
240 V setting; 1.02 A (true rms at 240 V, 50 Hz)

Typical Current:	
One disk mechanism:	120 V setting; 1.00 A (true rms at 120 V, 60 Hz) 240 V setting; 0.60 A (true rms at 240 V, 50 Hz)
Two disk mechanisms:	120 V setting; 1.47 A (true rms at 120 V, 60 Hz) 240 V setting; 0.82 A (true rms at 240 V, 50 Hz)
Distortion:	<5% flat-topped harmonic distortion
Line Surge and Sag:	
Transparent surge:	120% nominal line voltage for 0.5 sec
Recoverable surge/sag: (per MIL-T-28800)	115 V setting; 70% and 130% typical line voltage for 0.5 sec
Line Dropout:	Must not exceed 10 ms

TILT

The drive shall meet all performance specifications when mounted in an upright orientation which maintains the horizontal plane of the device to within ± 15 degrees of parallel to the horizon.

B

Typical Current Usage for Products No Longer In Production

INTRODUCTION

The typical current usage for products no longer in production is listed in Table B-1. These products are not included in Appendix A.

Table B-1. Typical Current For Products No Longer In Production

PRODUCT TYPE	100 V	120 V	208 V	220 V	240 V
	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz	50Hz/60Hz
7906	9.4A/8.7A	8.1A/7.5A	4.3A/4.3A	4.5A/4.2A	2.5A/3.9A
7920	7.7A/8.6A	6.6A/7.5A	3.3A/3.2A	3.7A/4.3A	3.4A/4.0A
7925	8.4A/7.8A	7.2A/6.6A		3.9A/3.8A	3.6A/3.5A

Environmental Requirements for Products No Longer In Production

INTRODUCTION

The environmental requirements for products no longer in production are condensed in Table C-1. These products are not included in Appendix A.

**Table C-1.
Environmental Requirements For Products No Longer In
Production**

	7906	7920	7925	7908	7910
TEMPERATURE					
Recommended limit:	20 - 25.5°C 68 - 78°F	20 - 25.5°C 68 - 78°F	20 - 25.5°C 68 - 78°F	20 - 25.5°C 68 - 78°F	20 - 25.5°C 68 - 78°F
Operating limit:	10 - 40°C 50 - 104°F	10 - 40°C 50 - 104°F	10 - 40°C 50 - 104°F	10 - 40°C 50 - 104°F	0 - 45°C 50 - 113°F
HUMIDITY² (%)					
Recommended limit:	NS ¹	NS	NS	NS	NS
Operating limit:	8 - 80	8 - 80	8 - 80	20 - 80	8 - 80
TILT					
Recommended limit:	NS	NS	NS	NS	NS
Operating limit:	± 20°	NS	NS	<30°	NS
SHOCK					
Recommended limit:	<0.5 g	<0.5 g	<0.5 g	<0.67 g	<0.5 g
Operating limit:	NS	NS	NS	1 g	NS
VIBRATION					
Recommended limit:	See below ³	See below ³	See below ³	<0.05 g rms	NS
Operating limit:	NS	NS	NS	<0.1 g rms	NS
AC POWER					
Recommended limit:	See below ⁴	See below ⁴	See below ⁴	NS	NS
Operating limit:	+5%, -10%	+5%, -10%	+5%, -10%	NS	+5%, -10%
EMI⁵					
Recommended limit:	<0.1 V/m	<0.1 V/m	<0.1 V/m	<0.2 V/m	<0.1 V/m
Operating limit:	<0.5 V/m	NS	NS	<1 V/m	NS
ESD					
Recommended limit:	<500 V	<500 V	<500 V	<500 V	<500 V
Operating limit:	<12.5 kV	NS	NS	<12.5 kV	NS
¹ NS means Not Specified. ² Humidity is noncondensing. ³ PSD of 0.000004 g ² /Hz from 5 - 2500 Hz. ⁴ AC power daily average not to vary more than ±2% from nominal value. ⁵ EMI denotes radiated susceptibility.					

**C-2 Environmental Requirements for Products
No Longer In Production**



D

Power Cord Options

Introduction

Refer to the figure D-1 and table D-1 for all power cord options.

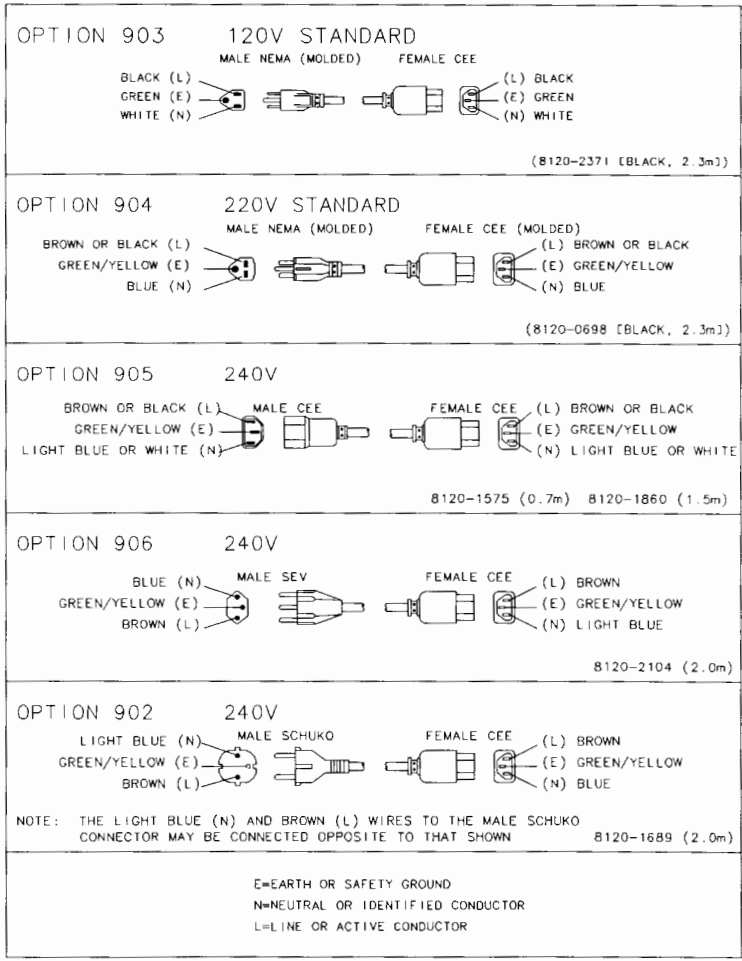


Figure D-1. Power Cord Options

D-2 Power Cord Options

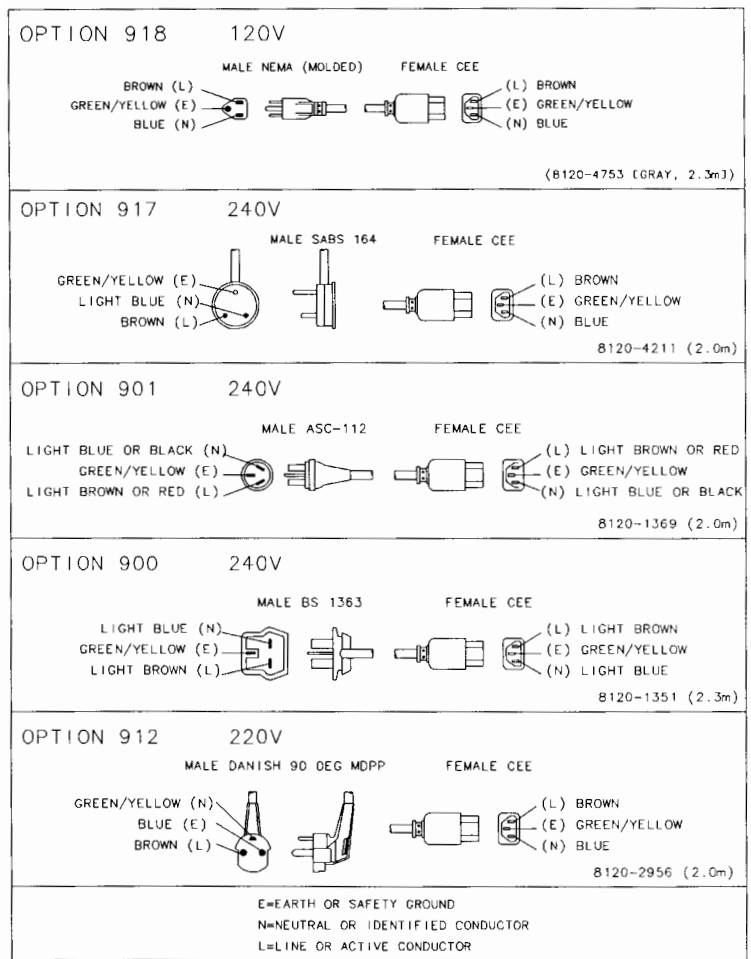


Figure D-1. Power Cord Options (continued)

Table D-1. Power Cord Options By Country

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
531	Afghanistan	902	220	50
481	Albania	902	220	50
721	Algeria	902	220	50
951	American Samoa	903	120	50
762	Angola	902	220	50
357	Argentina	901	220	50
602	Australia	901	240	50
433	Austria	902	220	50
467	Azores	902	220	50
236	Bahamas	903	120	60
525	Bahrain	900	240	50
538	Bangladesh	902	240	50
272	Barbados	900	240	50
423	Belgium	902	220	50
208	Belize (Br. Honduras)	903	120	60
761	Benin (Dahomey)	902	220	50
232	Bermuda	903	120	60
335	Bolivia	902	220	50
793	Botswana	900	240	50
351	Brazil	903	120	60
781	Br. Indian Ocean Terr.	900	240	50
561	Brunei	900	240	50
487	Bulgaria	902	220	50
546	Burma	902	240	50
767	Burundi	902	220	50
243	Caicos	903	120	60
742	Cameroon	902	220	50
122	Canada	903	120	60
733	Canary Islands	902	220	50
941	Canton	900	240	50

D-4 Power Cord Options

Table D-1. Power Cord Options By Country (continued)

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
244	Cayman Island	903	120	60
754	Central African Republic	902	220	50
756	Chad	902	220	50
337	Chile	902	220	50
570	China (Mainland)	901	220	50
583	China (Taiwan)	903	120	60
301	Columbia	903	120	60
789	Comoros	902	220	50
763	Congo (Brazzaville)	902	220	50
223	Costa Rica	903	120	60
239	Cuba	903	120	60
491	Cyprus	900	240	50
435	Czechoslovakia	902	220	50
409	Denmark	912	220	50
777	Djibouti	902	220	50
247	Dominican Republic	903	120	60
331	Ecuador	903	120	60
729	Egypt	902	220	50
211	El Salvador	903	120	60
941	Enderbury Island	900	240	50
738	Equatorial Guinea	900	240	50
447	Estonia	902	220	50
774	Ethiopia	902	220	50
372	Falkland Isl. (Is. Malvinas)	900	240	50
405	Finland	902	220	50
427	France	902	220	50
317	French Guiana	902	220	50
790	French Indian Ocean Areas	902	220	50
641	French Pacific Islands	902	220	50
283	French West Indies	903	120	50

Table D-1. Power Cord Options By Country (continued)

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
755	Gabon	902	220	50
750	The Gambia	900	240	50
512	Gaza Strip	902	220	50
429	Germany, Demo. Rep. (E)	902	220	50
428	Germany, Fed. Rep. (W)	902	220	50
749	Ghana	900	240	50
472	Gibraltar	900	240	50
473	Gozo	902	220	50
484	Greece	902	220	50
101	Greenland	912	220	50
935	Guam	903	120	60
205	Guatemala	903	120	60
746	Guinea	900	240	50
312	Guyana	903	120	60
245	Haiti	903	120	60
215	Honduras	903	120	60
582	Hong Kong	900	220	50
437	Hungary	902	220	50
400	Iceland	902	220	50
533	India	902	240	50
560	Indonesia	902	220	50
507	Iran	902	220	50
505	Iraq	902	220	50
419	Ireland	900	240	50
508	Israel	903	220	50
475	Italy	902	220	50
748	Ivory Coast	902	220	50
241	Jamaica	903	120	50
588	Japan	918	100	50
511	Jordan	902	220	50

D-6 Power Cord Options

Table D-1. Power Cord Options By Country (continued)

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
555	Kampuchea	903	120	50
779	Kenya	900	240	50
580	Korea, Republic of	903	100	60
513	Kuwait	902	240	50
553	Laos	903	220	50
449	Latvia	902	220	50
504	Lebanon	902	240	50
248	Leeward & Windward Isl.	903	120	50
799	Lesotho	900	240	50
765	Liberia	903	120	60
725	Libya	902	240	50
451	Lithuania	902	220	50
423	Luxembourg	902	220	50
566	Macao	900	240	50
759	Madeira Islands	902	220	50
788	Malagasy Republic	902	220	50
797	Malawi	900	240	50
557	Malaysia	900	240	50
745	Mali	902	220	50
473	Malta	902	220	50
741	Mauritania	902	220	50
785	Mauritius	900	240	50
201	Mexico	903	120	60
931	Midway Islands	903	120	60
161	Miquelon	902	220	60
574	Mongolia	902	220	50
714	Morocco	902	220	50
787	Mozambique	902	220	50
792	Namibia	902	240	50

Table D-1. Power Cord Options By Country (continued)

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
536	Nepal	902	240	50
277	Netherlands Antilles	902	220	50
421	Netherlands (Holland)	902	220	50
614	New Zealand	901	220	50
219	Nicaragua	903	220	50
751	Niger	902	240	50
753	Nigeria	900	240	50
579	North Korea	902	100	60
403	Norway	902	220	50
523	Oman	902	240	50
686	Other Pacific Isl.	903	120	60
535	Pakistan	902	240	50
225	Panama	903	120	60
604	Papua New Guinea	901	220	50
353	Paraguay	902	220	50
333	Peru	903	220	60
565	Phillippines	903	120	60
455	Poland	902	220	50
471	Portugal	902	220	50
903	Puerto Rico	903	120	60
518	Qatar	900	240	50
791	Republic of So. Africa	902	240	50
485	Romania	902	220	50
769	Rwanda	902	220	50
758	St. Helena	900	240	50
161	St. Pierre Islands	902	220	60
417	Saudi Arabia	902	220	50
744	Senegal	902	220	50
780	Seychelles	900	240	50
747	Sierra Leone	900	240	50

D-8 Power Cord Options

Table D-1. Power Cord Options By Country (continued)

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
559	Singapore	900	240	50
770	Somalia	902	220	50
568	Southern Asia	900	240	50
622	Southern Pacific Isl.	900	240	50
469	Spain	902	220	50
735	Spanish Africa	902	220	50
542	Sri Lanka (Ceylon)	902	240	50
732	Sudan	900	240	50
315	Suriname	903	120	60
795	Swaziland	900	240	50
401	Sweden	902	220	50
441	Switzerland	906	220	50
502	Syria	902	220	50
783	Tanzania	900	240	50
549	Thailand	903	220	50
274	Tobago	903	120	60
752	Togo	902	220	50
274	Trinidad	903	120	60
684	Trust Terr. of Pacific Isl.	903	120	60
723	Tunisia	902	220	50
489	Turkey	902	220	50
243	Turks Isl.	903	120	60
778	Uganda	900	240	50
520	United Arab Emirates	900	240	50
412	United Kingdom	900	240	50
760	Upper Volta	902	220	50
355	Uruguay	901	220	50
000	U.S.A.	903	120	60
461	USSR	902	220	50
307	Venezuela	903	120	60

Table D-1. Power Cord Options By Country (continued)

CTRY. CODES	COUNTRY	HP OPTION	VOLTS	HERTZ
552	Vietnam	903	120	50
911	Virgin Islands	903	120	60
933	Wake Island	903	120	60
764	Western Africa	902	220	50
737	Western Sahara	902	220	50
615	Western Samoa	901	240	50
522	Yemen (Aden)	900	240	50
521	Yemen (Sana)	900	240	50
479	Yugoslavia	902	220	50
766	Zaire	902	220	50
794	Zambia	900	240	50
796	Zimbabwe	900	240	50



Index

A

acoustics, 3-4
altitude, **2-4**
 effects of, 2-2
ammonia, 2-15

B

basic monthly maintenance charge, 1-2
BMMC. *See* basic monthly maintenance charge

C

climate
 effects of, 2-2
conducted interference susceptibility, 2-8
contaminants, **2-11**
 corrosive, 2-13
 particulate, 2-13
cooling requirements, 2-15
corrosive contaminants, 2-13
 ammonia, 2-15
 halogens, 2-15
 hydrogen sulfide, 2-14
 sulfur dioxide, 2-14
 total oxidants, 2-14
customer engineering services, 1-2
customer responsibility, 1-2

E

effects of climate, 2-2
electromagnetic interference, 2-7
electromagnetic susceptibility, **2-7**

 conducted interference, 2-8
 electrostatic discharge, 2-8
 magnetic susceptibility, 2-8
 power line irregularities, 2-8
 radiated interference, 2-7
electrostatic discharge, 2-8
EMI. *See* electromagnetic interference
environmental requirements
 list of, 2-1
 nonoperating, 3-2
 operating, 3-2
 recommended , 3-2

G

ground-to-ground noise, 2-9

H

halogens, 2-15
humidity
 effects of, 2-2
hydrogen sulfide, 2-14

L

line dropout, 2-9
line transients, 2-9
long-term storage, 3-2

M

magnetic fields
 susceptibility to, 2-8
magnetic susceptibility, 2-8
maintenance services, 1-2

N

neutral-to-ground noise, 2-9

noise

ground, 2-9

O

operating environments

controlled computer room, 3-3

general office, 3-4

over/under voltage, 2-9

P

particulate contaminants, 2-13

power cords, D-1

power line distortion, 2-9

power line irregularities, 2-8

ground-to-ground noise, 2-9

line dropout, 2-9

line transients, 2-9

neutral-to-ground noise, 2-9

over/under voltage, 2-9

power line distortion, 2-9

power spectral density, 2-3

product testing, 1-1

PSD. *See* power spectral density

R

radiated interference susceptibility, 2-7

random vibration, 2-3

responsibility

customer, 1-2

S

shock, 2-4

sound power level, 3-4

sound pressure level, 3-4

static electricity, 2-8

storage

long-term, 3-2

sulfur dioxide, 2-14

T

temperature

effects of, 2-2

testing

product, 1-1

type, 1-1

tilting

effects on performance, 2-15

total oxidants, 2-14

type testing, 1-1

V

vibration, 2-3

random, 2-3

SALES OFFICES

Arranged alphabetically by country

1

HEADQUARTERS OFFICES

If there is no sales office listed for your area, contact one of these headquarters offices.

ASIA

Hewlett-Packard Asia Ltd.
22/F, Bond Centre, West Tower
69 Queenway, Central
HONG KONG
G.P.O. Box 863, Hong Kong
Tel: 5-8487777
Telex: 76783 HPA HX
Cable: HPASAL TD

CANADA

Hewlett-Packard (Canada) Ltd.
8877 Goreway Drive
MISSISSAUGA, Ontario L4V 1M8
Tel: (416) 678-9430
Telex: 069-8644

EASTERN EUROPE

Hewlett-Packard Ges.m.b.H.
Liebigasse 1
P.O. Box 72
A-1222 **VIENNA**, Austria
Tel: (222) 2500-4
Telex: 13 4425 HEPA A

NORTHERN EUROPE

Hewlett-Packard S.A.
V. D. Hootaan 241
P.O. Box 999
NL-118 LN 15 **AMSTELVEEN**
The Netherlands
Tel: 20 5479999
Telex: 18919 tgnr

SOUTH EAST EUROPE

Hewlett-Packard S.A.
World Trade Center
110 Avenue Louis-Casas
1216 Coltrin, **GENEVA**, Switzerland
Tel: (022) 96 96 51
Telex: 27225 tpsr
Mail Address:
P.O. Box
CH-1211 Meyrin 1
GENEVA
Switzerland

MIDDLE EAST AND CENTRAL AFRICA

Hewlett-Packard S.A.
Middle East/Central
Africa Sales H.O.
7, rue du Bois-du-Lan
P.O. Box 364
CH-1211 Meyrin 1
GENEVA
Switzerland
Tel: (022) 83 12 12
Telex: 27853 hmea ch
Telefax: (022) 63 15 35
European Operations
Hewlett-Packard S.A.,
150, Route du Nant d'Avril
1217 Meyrin 2
GENEVA, Switzerland
Tel: 41 22/838111

UNITED KINGDOM

Hewlett-Packard Ltd.
Nine Mile Ride
WOKINGHAM
Berksire, RG11 3LL
Tel: 0344 773 100
Telex: 848805/8488 14/8488 12

UNITED STATES OF AMERICA

Customer Information Center
(800) 752-0900
6:00 AM to 5 PM Pacific Time

EASTERN USA

Hewlett-Packard Co.
4 Choke Cherry Road
ROCKVILLE, MD 20850
Tel: (301) 670-4300

MIDWESTERN USA

Hewlett-Packard Co.
5201 Tollview Drive
ROLLING MEADOWS, IL 60008
Tel: (312) 255-9800

SOUTHERN USA

Hewlett-Packard Co.
2015 South Park Place
ATLANTA, GA 30359
Tel: (404) 555-1500

WESTERN USA

Hewlett-Packard Co.
5151 Lankershim Blvd.
NORTH HOLLYWOOD, CA 91601
Tel: (818) 505-5600

OTHER INTERNATIONAL AREAS

Hewlett-Packard Co.
Intercontinental Headquarters
3495 Deer Creek Road
PALO ALTO, CA 94304
Tel: (415) 857-5027
Telex: 034-8300
Cable: HEWPACK

ALGERIA

Hewlett-Packard Trading S.A.
Bureau de Liaison Alger
Ville des Lions
9, Hai Gailou
DZ-BORDJ EL BARRIS
Tel: 78 03 36
Telex: 63343 alion dz

ANGOLA

Telecra Angola LDA
Empresa Técnica de Equipamentos
16 rue Cons. Julio de Vilhena
LUANDA
Tel: 355 15,355 16
Telex: 3134

ARGENTINA

Hewlett-Packard Argentina S.A.
Montañeses 2140/50
BUENOS AIRES
Tel: 54 1-11-141
Telex: 22796 HEW PAC-AR

Biotron S.A.C.I. M.s.r.
Av. Paso Colon 221, Piso 9
BUENOS AIRES
Tel: 541-333-490,
541-322-587
Telex: 17595 BIONAR
Laboratorio Rodriguez
Corrales S.R.L.
Misiones, 1156 - 1876
Bernal, Oeste
BUENOS AIRES
Tel: 252-3958, 252-4991

Intermaco S.R.L.
Florida 537/71
Galeria Jardin - Local 28
1005 BUENOS AIRES
Tel: 393-447 1/1828
Telex: 22796 HEW PAC-AR

Argentina Esanco S.R.L.
A/ASCO 2328
1416 BUENOS AIRES
Tel: 541-58-1981, 641-59-2767
Telex: 22796 HEW PAC-AR

All Computers S.A.
Montañeses 2140/50 5 Piso
1428 BUENOS AIRES
Tel: 781-4030/4898/783-4886
Telex: 18148 Ocm

AUSTRALIA

Customer Information Centre
Tel: (06) 635821

Adelaide, South Australia Office

Hewlett-Packard Australia Ltd.
153 Grenfell Road
PARKSIDE, S.A. 5063
Tel: 61-8-272-5911
Telex: 62536
Cable: HEWPARD Adelaide

Brisbane, Queensland Office

Hewlett-Packard Australia Ltd.
10 Payne Road
THE GAP, Queensland 4061
Tel: 61-7-300-4133
Telex: 42133
Cable: HEWPARD Brisbane

Canberra, Australia Capital Territory Office

Hewlett-Packard Australia Ltd.
Thyne Street, Farn Hill Park
BRIDE, A.C.T. 2817
P.O. Box 257
JAMISON, A.C.T. 2814
Tel: 61-62-80-4244
Telex: 62650
Cable: HEWPARD Canberra

Melbourne, Victoria Office

Hewlett-Packard Australia Ltd.
3141 Joseph Street
P.O. Box 221
BLACKBURN, Victoria 3130
Tel: (03) 895-2895
Telex: 31-024
Cable: HEWPARD Melbourne

Perth, Western Australia Office

Hewlett-Packard Australia Ltd.
Herdman Business Park
CLAREMONT, W.A. 6010
Tel: 61-8-383-2188
Telex: 53859
Cable: HEWPARD Perth

Sydney, New South Wales Office

Hewlett-Packard Australia Ltd.
17-29 Talavera Road
P.O. Box 308
NORTH RYDE, N.S.W. 2113
Tel: 61-2-888-4444
Telex: 21561
Cable: HEWPARD Sydney

AUSTRIA

Hewlett-Packard Ges.m.b.H.
Verkaufsbüro Graz
Grieshoferstrasse 94
A-8052 **GRATZ**
Tel: 43-316-291-5660
Telex: 312375
Hewlett-Packard Ges.m.b.H.
Liebigasse 1
P.O. Box 72
A-1222 **VIENNA**
Tel: 43-222-2500
Telex: 134425 HEPA A

BAHRAIN

Green Salon
P.O. Box 537
MANAMA
Tel: 255503-250950
Telex: 84419
Wael Pharmacy
P.O. Box 648
MANAMA
Tel: 256123
Telex: 8550 Wael BN

British Columbia Office

Zayani Computer Systems
218 Shaik Mubarak Building
Government Avenue
P.O. Box 5918
MANAMA
Tel: 276278
Telex: 9015 plans bn

BELGIUM

Hewlett-Packard Belgium S.A./N.V.
Eind de la Woluwe, 100
Woluweled
B-1200 BRUSSELS
Tel: (02) 32-2-761-31-11
Telex: 23494 hewpac

BERMUDA

Applied Computer Technologies
Atlantic House Building
P.O. Box HM 2091
Par-La-Ville Road
HAMILTON S
Tel: 295-1816
Telex: 380 3589/ACT BA

BOLIVIA

Arrellano Ltda
Av. 20 de Octubre #2125
Casilla 1385
LA PAZ
Tel: 368541

BRAZIL

Telex 810-matica S.A.
Alameda Rio Negro, 750-L. AND.
ALPHAVILLE
06400 Barueri SP
Tel: (011) 421-1311
Telex: (011) 71351 HPRR BR
Cable: HEWPACK Sao Paulo

Hewlett-Packard do Brasil S.A.
Praia de Botafogo 226-A-614
6. AND.-CONJ. 601
Edifício Argentina - Ala A
22250 RIO DE JANEIRO, RJ
Tel: (021) 552-8422
Telex: 21905 HPRR BR
Cable: HEWPACK Rio de Janeiro

Van Den Cientifica Ltda.
Rua Jose Bonifacio, 458
Todos os Santos
20711 RIO DE JANEIRO, RJ
Tel: (021) 553-8223
Telex: 33487 EGL BR

ANAMED I.C.E.I. Ltda.
Rua Vergueiro, 3001
04012 SAO PAULO, SP
Tel: (011) 572-1106
Telex: 1124740 AMED BR

BRUNEI

Komputer Wisman Sdn Bhd
G6, Chandrasekhar Cmpk.
Jalan Tutong
P.O. Box 1297
BANDAR SERI BEGAWAN
NEGARA BRUNI DARUSSALAM
Tel: 673-2-2000-7026711

CAMEROON

Senec
S. P. 23
DOUALA
Tel: 420153
Telex: 5351

CANADA

Alberta
Hewlett-Packard (Canada) Ltd.
3030 3rd Avenue N.E.
CALGARY, Alberta T2A 617
Tel: (403) 255-3100

Hewlett-Packard (Canada) Ltd.
11120-178th Street
EDMONTON, Alberta T5S 1P2
Tel: (403) 486-8666

British Columbia

Hewlett-Packard (Canada) Ltd.
10891 Shelburne Way
RICHMOND,
British Columbia V6X 2W8
Tel: (804) 270-2277
Telex: 610-922-5059

Hewlett-Packard (Canada) Ltd.
1211 - 3350 Douglas Street
VICTORIA, British Columbia V8Z 3L1
Tel: (604) 381-6616

Manitoba

Hewlett-Packard (Canada) Ltd.
1825 Inkster Blvd.
WINNIPEG, Manitoba R2X 1R3
Tel: (204) 694-2777

SALES OFFICES

Arranged alphabetically by country (cont'd)

CANADA (Cont'd)

New Brunswick

Hewlett-Packard (Canada) Ltd.
814 Main Street
MONCTON, New Brunswick E1C 1E6
Tel: (506) 855-2841

Nova Scotia

Hewlett-Packard (Canada) Ltd.
Suite 111
900 Windmill Road
DARTMOUTH, Nova Scotia B3B 1P7
Tel: (902) 489-7820

Ontario

Hewlett-Packard (Canada) Ltd.
3322 N. Service Rd., Unit W03
BURLINGTON, Ontario L7N 3G2
Tel: (416) 335-8044

Hewlett-Packard (Canada) Ltd.
552 Newbold Street
LONDON, Ontario N6E 2S5
Tel: (519) 686-9181

Hewlett-Packard (Canada) Ltd.
6871 Goreway Drive
MISSISSAUGA, Ontario L4V 1M8
Tel: (416) 675-9430
Telex: 060-43544

Hewlett-Packard (Canada) Ltd.
2670 Queenovier Dr.
OTTAWA, Ontario K2B 8K1
Tel: (613) 820-6483

Hewlett-Packard (Canada) Ltd.
3790 Victoria Park Ave.
WILLOWDALE, Ontario M2H 3H7
Tel: (416) 499-2550

Quebec

Hewlett-Packard (Canada) Ltd.
17500 Trans Canada Highway
South Service Road
KIRKLAND, Quebec H9J 2X8
Tel: (514) 697-4232
Telex: 056-21521

Hewlett-Packard (Canada) Ltd.
1150 rue Claire Fontaine
QUEBEC CITY, Quebec G1R 5G4
Tel: (418) 648-0726

Saskatchewan

Hewlett-Packard (Canada) Ltd.
130 Robin Crescent
SASKATOON, Saskatchewan S7L 6M7
Tel: (306) 242-3702

CHILE

ASC Ltda.
Austria 2041
SANTIAGO

Tel: 223-5946, 223-6148
Telex: 392-340192 ASC CK

Jorge Calzagni y Cia
Av. Italia 634 Santiago
Casilla 16475
SANTIAGO 9

Tel: 9-011-592-222-0222
Telex: 392440263 JCYCL CZ

Metrolab S.A.
Monteale 454 of. 206
SANTIAGO
Tel: 355752, 398298
Telex: 340886 METLAB CK

Olympic (Chile) Ltda.

Av. Rodrigo de Araya 1045
Casilla 256-V
SANTIAGO 21
Tel: 225-5044
Telex: 340892 OLYMP
Cable: Olimpichile Santiagochile

CHINA, People's Republic of

China Hewlett-Packard Co., Ltd.
22/F Bond Centre, West Tower
89 Queensway, Central
HONG KONG

Tel: 5-8487777
Telex: 76793 HPA HK
Cable: HP ASIA LTD

China Hewlett-Packard Co., Ltd.
P.O. Box 9610, Beijing
4th Floor, 2nd Watch Factory Main
Shuang Yu Shou, Bei San Huan Road
Hai Dian District
BEIJING

Tel: 33-1947 33-7426
Telex: 22801 CTSHP CN
Cable: 1520 Beijing

China Hewlett-Packard Co., Ltd.
CHP Shanghai Branch
23/F Shanghai Union Building
100 Yan An Rd. East
SHANGHAI

Tel: 265550
Telex: 33571 CHPSB CN
Cable: 3416 Shanghai

COLOMBIA

Instrumentacion
H. A. Langebaek & Kier S.A.
Carrera 4A No. 52A-28
Apartado Aereo 6287

BOGOTA 1, D.E.
Tel: 212-1468
Telex: 44400 INST CO
Cable: AARIS Bogota

Neotromedica Ltda.
Calle 123 No. 9B-31
Apartado Aereo 100-958
BOGOTA D.E. 10

Tel: 213-2627, 213-1615
Telex: 43415 HEGAS CO

Consumiendo
Avenida 15 # 107-80
BOGOTA D.E.
Tel: 57-214-4458
Telex: 39642450 COMPU CO

Carvajal, S.A.
Calle 29 Norte No. 6A-40
Apartado Aereo 46
CALI

Tel: 9-011-57-3-621888
Telex: 38655650 CUJCL CO

CONGO

Stelic-Comp
B. P. 2105
BRAZZAVILLE

Tel: 815034
Telex: 5262

COSTA RICA

Cientifica Costarricense S.A.
Avenida 2, Calle 5
San Pedro de Montes de Oca
Apartado 10159
SAN JOSE

Tel: 9-011-506-243-820
Telex: 3032367 GALGUR CR

O. Fischer R. Y. Cia. S.A.
Apartados 434-10174
SAN JOSE

Tel: 23-72-44
Telex: 2378
Cable: OFRI

CYPRUS
Telepsia Ltd.
P.O. Box 1192
Valentine House
8 Stassandrou St.

NICOSIA
Tel: 45 628, 62 698
Telex: 5945 trlx cy

DENMARK

Hewlett-Packard A/S
Kongensvej 25
DK-2450 BIKESROD
Tel: 45-02-81-6640
Telex: 37409 hpas dk

Hewlett-Packard A/S
Rølgødsvej 32
DK-8240 RISSKOV, Aarhus
Tel: 45-06-17-6000
Telex: 37409 hpas dk

DOMINICAN REPUBLIC
Microprog S.A.
Juan Tomás Mejía y Cotes No. 60
Arroyo Honda

SANTO DOMINGO
Tel: 565-6268
Telex: 4510 ARENTA DR (PCA)

ECUADOR

CYEDE Cia. Ltda.
Avenida Eloy Alfaro 1749
y Belgica
Casilla 8423 CCI

QUITO
Tel: 9-011-593-2-450975
Telex: 38322548 CYEDE ED

Medtronica
Valladolid 524 Madrid
P.O. 9171, QUITO
Tel: 2-238-951
Telex: 2298 ECUAME ED

Hospitalar S.A.
Riobes 825
Casilla 3590
QUITO

Tel: 545-250, 545-122
Telex: 2485 HOSPTL ED
Cable: HOSPITALAR-Quito

Ecuador Overseas Agencies C.A.
Calle 9 de Octubre 8018
P.O. Box 1296, Guayaquil
QUITO

Tel: 39343673 ECUOVE ED
Telex: 3381 PRCGYE ED

EGYPT

Sakro Enterprises
P.O. Box 259
ALEXANDRIA
Tel: 802908, 308020, 805302
Telex: 54333

International Engineering Associates
6 El Gamma Street
Agouza
CAIRO

Tel: 71-21-88134-80-840
Telex: 90930 IEA UN
Cable: INTEGASSO

Sakro Enterprises
70 Mosaadik Street
Dokki, Giza
CAIRO

Tel: 706 440, 701 087
Telex: 9337

S.S.C. Medical
40 Gazarat El Arab Street
Mohandessin
CAIRO

Tel: 803844, 805998, 810263
Telex: 20503 SSC UN

EL SALVADOR
IPESA de El Salvador S.A.
29 Avenida Norte 1223
SAN SALVADOR

Tel: 9-011-503-266-858
Telex: 301 29539 IPESA SAL

ETHIOPIA

Serc-Ethiopia
P.O. Box 2754
ADDIS ABABA
Tel: 185 114
Telex: 21150

FINLAND

Hewlett-Packard Finland
Field Oy
Nittilympölkä 10
00620 HELSINKI

Tel: (90) 757-1011
Telex: 122022 Field SF

Hewlett-Packard Oy
Propankalliontie 17
02200 ESPOO
Tel: (90) 867-21
Telex: 121553 HEWPA SF

FRANCE

Hewlett-Packard France
2,1. Mercure B
Rue Berthelet
13763 Les Mille Cedex
AUX-LES-PROVENCE

Tel: 33-42-58-4102
Telex: 410770F

Hewlett-Packard France
84, Rue Marchand Saillant
F-61000 ALENCON
Tel: (33) 29 04 42

Hewlett-Packard France
Batiment Levitan
2365, route de Grassa
Strelle Autoroute
06600 ANTIBES
Tel: (93) 74-59-19

Hewlett-Packard France
28 Rue de la République
Boite Postale 503
25206 BESANCON CEDEX, FRANCE
Tel: (81) 83-15-22
Telex: 361157

Hewlett-Packard France
ZA Kergaradec
Rue Fernand Forest
F-29239 GOUERNOU
Tel: (96) 41-87-90

Hewlett-Packard France
Chemin des Mouilles
Boite Postale 162
69131 ECUILLY Cedex (Lyon)
Tel: 33-78-33-8125
Telex: 310617F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F

Hewlett-Packard France
Parc d'activités du Bois Briard
7 Avenue du Lac
F-91040 EVRY Cedex
Tel: 01/60 77-83-83
Telex: 692315F



Hewlett-Packard France
125, Rue de Faubourg Barmer
45000 ORLEANS
Tel: 33-38-62-2031

Hewlett-Packard France
Zone Industrielle de Courtabouf
Avenue des Tropiques
91947 LES ULIS Cedex (Orsay)
Tel: 33-6-807-7825
Telex: 600048F

Hewlett-Packard France
15, Avenue de L'Amiral-Brux
75782 PARIS Cedex 16
Tel: 33-15-02-1220
Telex: 613663F

Hewlett-Packard France
P.O. Box 89
LIBREVILLE
242 Ter, Ave J Mermoz
64000 PAU
Tel: 33-59-63-3802
Telex: 556365F

Hewlett-Packard France
6, Place Sainte Croix
86000 POTTIERS
Tel: 33-49-41-2707
Telex: 792335F

Hewlett-Packard France
47, Rue de Chailvaise
51100 REMS
Tel: 33-26-86-6910

Hewlett-Packard France
Parc d'activités de la Polarie
Rue Louis Keraudren-Boitel
35000 RENNES
Tel: 33-99-51-4244
Telex: 749127F

Hewlett-Packard France
98 Avenue de Bretagne
76 100 ROUEN
Tel: 33-35-63-5766
Telex: 770035F

Hewlett-Packard France
4, Rue Thomas-Mann
Boite Postale 56
67033 STRASBOURG Cedex
Tel: (88) 28-56-46
Telex: 800141F

Hewlett-Packard France
Le Péripole III
3, Chemin du Pigeonnier de la Cèdre
31051 TOULOUSE Cedex
Tel: 33-61-40-1112
Telex: 531638F

Hewlett-Packard France
Les Cardouines
Bâtiment B2
Route des Dolines
Parc d'activités de Valbonne
Sophia Antipolis
06560 VALBONNE (Nice)
Tel: (93) 85-39-40

Hewlett-Packard France
9, Rue Baudin
26000 VALENCE
Tel: 33-79-42-7616

Hewlett-Packard France
Carlor
ZAC de Bois Briand
57640 VIGY (Metz)
Tel: (81) 71 20 22

Hewlett-Packard France
Parc d'activités des Prés
1, Rue Pégiv Cedex
59658 VILLENEUVE D'ASCQ
Tel: 33-20-91-4125
Telex: 160124F

Hewlett-Packard France
Parc d'activités Paris-Nord 11
Boite Postale 60020
95971 Rosny-Charles de Gaulle
VILLEPITE
Tel: (1) 48 63 80 80
Telex: 211032F

GABON
Sho Gabon
P.O. Box 89
LIBREVILLE
Tel: 721 484
Telex: 5230

GERMAN FEDERAL REPUBLIC

Hewlett-Packard GmbH
Vertriebszentrale Deutschland
Hewlett-Packard-Strasse
Postfach 1641
D-6300 BAD HONBURG v.d.H
Tel: (06 172) 400-0
Telex: 410 844 hpohg

Hewlett-Packard GmbH
Geschäftsstelle
Kathenstrasse 2-4
D-1000 BERLIN 30
Tel: (030) 21 99 04-0
Telex: 018 3405 hpbin d

Hewlett-Packard GmbH
Verbindungsstelle Bonn
Friedrich-Ebert-Allee 26
5300 BONN
Tel: (0228) 234001
Telex: 8889421

Hewlett-Packard GmbH
Vertriebszentrum Südwest
D-7030 BÖBLINGEN
Postfach 1427
Tel: (07031) 645-0
Telex: 7265 743 hep

Hewlett-Packard GmbH
Zentralbereich Mitg
Herenberger Strasse 130
D-7030 BÖBLINGEN
Tel: (07031) 14-0
Telex: 7265739 hep

Hewlett-Packard GmbH
Geschäftsstelle
Schneefstr. 28a
D-4600 DORTMUND-41
Tel: (0231) 4500-1
Telex: 822888 hpvtd

Hewlett-Packard GmbH
Reparaturzentrum Frankfurt
Bernstrasse 117
6000 FRANKFURT/MAIN 60
Tel: (069) 500001-0
Telex: 413249 hpflm

Hewlett-Packard GmbH
Vertriebszentrum Nord
Kopstadtring 5
D-2000 HAMBURG 60
Tel: 49-40-63-804-0
Telex: 021 63 032 hpgh d

Hewlett-Packard GmbH
Geschäftsstelle
Hedding 37-39
D-3000 HAMNOVER 61
Tel: (0511) 5706-0
Telex: 002 3259 hphn

Hewlett-Packard GmbH
Geschäftsstelle
Rosa-Luxemburg Weg 2-4
D-5000 MANNHEIM
Tel: 49-0621-70-45-0
Telex: 0462105 hpntm

Hewlett-Packard GmbH
Geschäftsstelle
Messerschmittstrasse 7
D-7910 MULLHEIM
Tel: 49-0731-70-73-0
Telex: 0712818 HP ULM-D

Hewlett-Packard GmbH
Geschäftsstelle
Emmericher Strasse 13
D-8500 MÜNCHEN 10
Tel: (089) 5205-0
Telex: 062 880 hpmbg

Hewlett-Packard GmbH
Vertriebszentrum Ratingen
Belliner Strasse 111
D-4030 RATINGEN 4
Postfach 31 12
Tel: (02102) 494-0
Telex: 589 070 hpard

Hewlett-Packard GmbH
Vertriebszentrum München
Eichenwiese 5
D-8028 TAUFIRCHEN
Tel: 49-89-61-2070
Telex: 0524963 hpmdh

Hewlett-Packard GmbH
Geschäftsstelle
Erdmattlee
7517 WALDBRONN 2
Postfach 1251
Tel: (07243) 602-0
Telex: 792 838 hep

GREAT BRITAIN
See United Kingdom

GREECE

Hewlett-Packard A.E.
176, Kifissias Avenue
6th Floor
Halandri-ATHENS
Greece
Tel: 301116473 360, 301116726 090
Telex: 221 286 HPHLGR

Kostas Karayannis S.A.
8, Dimosio Street
ATHENS 133
Tel: 32 50 303, 32 37 371
Telex: 215962 RKAR GR

Impact
Intellect Div.
209 Mesogion
11525 ATHENS
Tel: 64744812
Telex: 218266

Hari Company
38, Mithakopoulou
ATHENS 612
Tel: 7236071
Telex: 216767

Helienco
P.O. Box 87528
16007 PUEBLO
Tel: 4827049
Telex: 241441

GUATEMALA
IPESA DE GUATEMALA
Avenida Reforma 3-48, Zona 9
GUATEMALA CITY
Tel: 316677, 317853, 66471/5
9-011-502-2-318627
Telex: 3055765 IPESA G

HONG KONG
Hewlett-Packard Asia, Ltd.
227 Bond Centre, West Tower
89 Queenway Central
HONG KONG
Tel: 5 848 7177
Telex: 76793 HPA HX
Cable: HEWPACK HONG KONG

CET Ltd.
10th Floor, Hua Asia Bldg
64-66 Gloucester Road
HONG KONG
Tel: (5) 200922
Telex: 85148 CET HX

Schmidt & Co. (Hong Kong) Ltd.
18th Floor, Great Eagle Centre
23 Harbour Road, Wanchai
HONG KONG
Tel: 5-830222
Telex: 74786 SCHMC HX

ICELAND
Hewlett-Packard Island
Höfðabakka 9
112 REYKJAVIK
Tel: 354-1-67-1000
Telex: 57409

INDIA
Computer products are sold through
Blue Star Ltd. All computer repairs
and maintenance service is done
through Computer Maintenance Corp.

Blue Star Ltd.
B. D. Patel House
Near Sardar Patel Colony
AHMEDABAD 380 014
Tel: 403531, 403532
Telex: 0121-234
Cable: BLUE FROST

Blue Star Ltd.
40/4 Lewis Road
BANGALORE 560 001
Tel: 57881, 867780
Telex: 0845-430 BSLBIN
Cable: BLUESTAR

Blue Star Ltd.
Bard Box House
Prabhadevi
BOMBAY 400 025
Tel: 4933101, 4833222
Cable: BLUESTAR

Blue Star Ltd.
115, Sarojini Devi Road
BOMBAY 400 003
Tel: 310-184, 345-774
Telex: 031-2960

Hewlett-Packard India
Meridian Commercial Complex
8th Floor
8 Windsor Place
Jalgaon
NEW DELHI 110 001
INDIA
Tel: 91-11384911
Telex: 31-4935 HPINDN

Blue Star Ltd.
Sahis
414/2 Vr Savarkar Marg
Prabhadevi
BOMBAY 400 025
Tel: 422-6155
Telex: 011-71193 BSSS IN
Cable: PROSTAR

Blue Star Ltd.
Kalyan, 19 Vishwas Colony
Alkapur, BARODA, 390 005
Tel: 65235, 65236
Cable: BLUE STAR

Blue Star Ltd.
7 Hare Street
P.O. Box 506
CALCUTTA 700 001
Tel: 230131, 230132
Telex: 031-61120 BSNF IN
Cable: BLUESTAR

Blue Star Ltd.
133 Kodambakkam High Road
MAADRAS 500 034
Tel: 472056, 472036
Telex: 041-379
Cable: BLUESTAR

Blue Star Ltd.
13 Community Center
New Friends Colony
NEW DELHI 110 006
Tel: 852647
Telex: 031-2463
Cable: BLUEFROST

Blue Star Ltd.
15/16 C Wellesley Rd
PUNE 411 011
Tel: 22775
Cable: BLUE STAR

Blue Star Ltd.
2-2-47/1105 Salarum Rd
SECUNDERABAD 500 003
Tel: 72057, 72058
Telex: 0155-459
Cable: BLUEFROST

Blue Star Ltd.
T.C. 7/603 Poomina
Manipalokathi
TRIVANDRUM 695 013
Tel: 65789, 65820
Telex: 0884-259
Cable: BLUESTAR

Computer Maintenance Corporation
Ltd.
115, Sarojini Devi Road
SECUNDERABAD 500 003
Tel: 310-184, 345-774
Telex: 031-2960

Hewlett-Packard India
Meridian Commercial Complex
8th Floor
8 Windsor Place
Jalgaon
NEW DELHI 110 001
INDIA
Tel: 91-11384911
Telex: 31-4935 HPINDN

4 SALES OFFICES
Arranged alphabetically by country (cont'd)

INDONESIA

BERCA Indonesia P.T.
P.O. Box 496/Jkt.
Jl. Abdi Muis 62
JAKARTA
Tel: 21-373009
Telex: 46748 BERSAL IA
Cable: BERSAL JAKARTA
BERCA Indonesia P.T.
P.O. Box 2497/Jkt
Antara Bldg., 12th Floor
Jl. Medan Merdeka Selatan 17
JAKARTA-PUSAT
Tel: 21-340417
Telex: 46748 BERSAL IA
BERCA Indonesia P.T.
Jalan Kulia 24
SURABAYA
Tel: 81118
Telex: 31146 BERSAL SB
Cable: BERSAL SURABAYA

IRAQ

Hewlett-Packard Trading S.A.
Service Operation
Al Mansour City 9B/3/7
BAGHDAD
Tel: 55149-73
Telex: 212-55 HEPARAO IK

IRELAND

Hewlett-Packard Ireland Ltd.
Temple House, Temple Road
Blackrock, Co. DUBLIN
Tel: 88/333-99
Telex: 30439
Hewlett-Packard Ltd.
75 Belfast Rd., Carrickfergus
Belfast BT38 8PH
NORTHERN IRELAND
Tel: 0963-87333
Telex: 747628

ISRAEL

Elder Electronic Instrument Ltd.
P.O. Box 1270
JERUSALEM 91000
16, Ohalev St.
JERUSALEM 94467
Tel: 533 221 553 242
Telex: 25231 AB/PAKRO IL
Computation and Measurement
Systems (CMS) Ltd.
11 Messad Street
61060
TEL-AVIV
Tel: 388 388
Telex: 33589 MOTH IL

ITALY

Hewlett-Packard Italiana S.p.A.
Traversa 99C
Via Giulio Perrom, 19
I-70124 **BARI**
Tel: (080) 41-07-44
Hewlett-Packard Italiana S.p.A.
Via Emilia, 51/C
I-40011 **BOLOGNA** Anzola Dell'Emilia
Tel: 39-051-731061
Telex: 511630

Hewlett-Packard Italiana S.p.A.

Via Principe Nicola 43G/C
I-95126 **CATANIA**
Tel: (095) 37-10-87
Telex: 970291
Hewlett-Packard Italiana S.p.A.
Via G. di Vittorio 10
20094 **CORSICO** (Milano)
Tel: 39-02-4403351
Hewlett-Packard Italiana S.p.A.
Viale Brigata Bisagno 2
16129 **GENOVA**
Tel: 39-19-541141
Telex: 215236
Hewlett-Packard Italiana S.p.A.
Viale G. Modugno 33
I-16156 **GENOVA PEGLI**
Tel: (010) 68-37-07
Telex: 215236
Hewlett-Packard Italiana S.p.A.
Via G. di Vittorio 9
20063 **COMASO** Sul
Naviglio
MILANO
Tel: (02) 923891
Telex: 334632
Hewlett-Packard Italiana S.p.A.
Via Nuova Rivoltana 95
20090 **LIBNO** (Milano)
Tel: 02-92761

Hewlett-Packard Italiana S.p.A.

Via Orsino 16
89122 **NAPOLI**
Tel: (081) 7611444
Telex: 710688
Hewlett-Packard Italiana S.p.A.
Via Pellizzo 15
35126 **PADOVA**
Tel: 39-49-664-888
Telex: 439315
Hewlett-Packard Italiana S.p.A.
Viale G. Pirelli 340
I-00144 **ROMA EUR**
Tel: 39-65-48-31
Telex: 610514
Hewlett-Packard Italiana S.p.A.
Via di Casellina 57/C
500519 **SCANDICCI-FIRENZE**
Tel: 39-55-753863

Hewlett-Packard Italiana S.p.A.

Viale G. Pirelli 340
I-00144 **ROMA EUR**
Tel: 39-65-48-31
Telex: 610514
Hewlett-Packard Italiana S.p.A.
Via di Casellina 57/C
500519 **SCANDICCI-FIRENZE**
Tel: 39-55-753863

Hewlett-Packard Italiana S.p.A.

Viale G. Pirelli 340
I-00144 **ROMA EUR**
Tel: 39-65-48-31
Telex: 610514
Hewlett-Packard Italiana S.p.A.
Via di Casellina 57/C
500519 **SCANDICCI-FIRENZE**
Tel: 39-55-753863

IVORY COAST

S.I.T.E.L.
Societe Ivoirienne de
Telecommunications
Bd. Glacard d'Estaing
Carrefour Marcey
Zone 4 A.
Boite postale 2580
ABIDJAN 01
Tel: 353600
Telex: 43175
S.I.T.I.
Immeuble "Le General"
Av. du General de Gaulle
01 BP 161
ABIDJAN 01
Tel: 321227
Telex: 22149

JAPAN

Yokogawa-Hewlett-Packard Ltd.
152-1, Onna
ATSUBU, Kanagawa, 243
Tel: (0482) 25-0031
Yokogawa-Hewlett-Packard Ltd.
Meiji-Seimei Bldg. 6F
3-1-1 Motochiba-Cho
CHIBA, 280
Tel: (0472) 25 7701
Yokogawa-Hewlett-Packard Ltd.
Yasuda-Seimei Hiroshima Bldg.
5-11, Hon-dori, Naka-ku
HIROSHIMA, 730
Tel: (082) 241-0611
Yokogawa-Hewlett-Packard Ltd.
Towa Building
2-2-3 Kaigan-dori, Chuo-ku
KOBE, 650
Tel: (078) 392-4781
Yokogawa-Hewlett-Packard Ltd.
Kunagaya Asahi 82 Bldg.
3-4 Tsukuba
KUMAGAYA, Saitama 380
Tel: (0485) 24-8563
Yokogawa-Hewlett-Packard Ltd.
Asahi Shinbun Daichi Seimei Bldg.
Shinjuku-ku
KUJIMOTOYO, 860
Tel: 96-354-7311
Yokogawa-Hewlett-Packard Ltd.
Shin-Kyoto Center Bldg.
614, Higashi-Shiojiri-cho
Karasuma-Nahiru
KYOTO, 600
Tel: 075-343-0921
Yokogawa-Hewlett-Packard Ltd.
7-8 Kokubun, 1 Chome, Sendai
MIYAGI, 980
Tel: (0222) 25-1011
Yokogawa-Hewlett-Packard Ltd.
GoHda Bldg. 2F
1-2-10 Gohda Okaya-Shi
Okaya-Shi
NAGANO, 384
Tel: (0268) 25 0851

Yokogawa-Hewlett-Packard Ltd.
Nagoya Kokusai Center Building
1-47-1, Nagoya, Nakamura-ku
NAGOYA, AICHI 450
Tel: (052) 571-5171

Yokogawa-Hewlett-Packard Ltd.
Sai-Kyo-Rien Building
1-2 Dole-cho
OMIYA-SHI BAITAMA 330
Tel: (0486) 45-8031

Yokogawa-Hewlett-Packard Ltd.
Chuo Bldg., 5-4-20 Nishi-Nakajima
4-20 Nishinakajima, 5 Chome,
Yokogawa-ku
OSAKA, 532
Tel: (06) 304-6021
Telex: YHPOSA 523-3624
Yokogawa-Hewlett-Packard Ltd.
1-27-15, Yabe
SAGAMIHARA Kanagawa, 229
Tel: 0427 58-1311

Yokogawa-Hewlett-Packard Ltd.
Haramitsu Motochiba-Cho Daichi
Seimei Bldg 219-21, Motochiba-Cho
Hamamatsu-shi
SHIZUOKA, 430
Tel: (0534) 56 1771
Yokogawa-Hewlett-Packard Ltd.
Shinjuku Daichi Seimei Bldg.
2-7-1, Nishi Shinjuku
Shinjuku-ku **TKYTO** 163
Tel: 03-348-4511
Yokogawa-Hewlett-Packard Ltd.
9-1, Takakura-cho
Hachioji-shi, **TKYTO**, 192
Tel: 81-426-42-1231

Yokogawa-Hewlett-Packard Ltd.
25-21 Takado-Higashi, 3-chome
Suginami-ku **TKYTO** 168
Tel: (03) 331-6111
Telex: 232-0224 YHPTOK
Yokogawa Hokushin Electric Corp.
(YEW)
Shinjuku-NS Bldg. 10F
9-32 Nishicho 2 Chome
Shinjuku-ku
TKYTO, 163
Tel: (03) 349-1859
Telex: J27584
Yokogawa-Hewlett-Packard Ltd.
Meiji-Seimei
Utsunomiya Odori Building
1-5 Odori, 2 Chome
UTSUNOMIYA, Tochigi 320
Tel: (0286) 33-1153

Yokogawa-Hewlett-Packard Ltd.
Yasuda Seimei Nishiguchi Bldg.
30-4 Tsuruy-cho, 3 Chome
Kanagawa-ku **YOKOHAMA** 221
Tel: (045) 312-1252

JORDAN

Scientific and Medical Supplies Co.
P.O. Box 1387
AMMAN
Tel: 24907, 39907
Telex: 21456 SABCO JO

KENYA

ADCOM Ltd. Inc., Kenya
P.O. Box 30070
NAIROBI
Tel: 331965
Telex: 22639

KOREA

Samsung Hewlett-Packard Co. Ltd.
Dongbang Yeeouido Building
12-16th Floor
36-1 Yeeouido-Dong
Youngdeungpo-Ku
SEOUL
Tel: 784-4666, 784-2666
Telex: 25186 SAMSAN K
Young In Scientific Co. Ltd.
Youngwha Building
547 Shinnae Dong, Kangnam-Ku
SEOUL 135
Tel: 546-7771
Telex: K23457 GINSCO

Dongbang Healthcare
Products Co. Ltd.
Suite 301 Medical Supply Center
Bldg. 1-31 Dongsungdong
Jong Ro-gu, **SEOUL**
Tel: 764-1171, 741-1641
Telex: K25706 TKBKCO
Cable: TKBEPCO

KUWAIT

Al-Khaldia Trading & Contracting
P.O. Box 830
SAFAT
Tel: 424810, 411726
Telex: 22481 AREEG KT
Cable: VISCOUNT
Gulf Compuling Systems
P.O. Box 25125
SAFAT
Tel: 439969
Telex: 23648
Photo & Cine Equipment
P.O. Box 270
SAFAT
Tel: 2445111
Telex: 22247 MATIN KT
Cable: MATIN KUWAIT
W. J. Towell Computer Services
P.O. Box 5897
SAFAT
Tel: 302640/1
Tel: 302636 TOWELL KT

LEBANON

Computer Information Systems S.A.L.
Chammais Building
P.O. Box 11-6274 Dora
BEIRUT
Tel: 89 40 73
Telex: 42309 checo le

LIBERIA

Unichemicals inc.
P.O. Box 4508
MONROVIA
Tel: 224282
Telex: 4508

LUXEMBOURG

Hewlett-Packard Belgium S.A./N.V.
Blvd de la Woluwe, 100
Woluwedal
B-1200 BRUSSELS
Tel: (02) 762-32-00
Telex: 23-494 paoben br

MADAGASCAR

Technique et Precision
12, rue de Nice
P.O. Box 1227
101 ANTANANARIVO
Tel: 22090
Telex: 22255

MALAYSIA

Hewlett-Packard Sales (Malaysia)
Sdn. Bhd.
9th Floor
Chung Kheaw Bank Building
48, Jalan Raja Laut
50738 KUALA LUMPUR, MALAYSIA
Tel: 63-296555
Telex: 31011 HPSM MA
Protel Engineering
P.O. Box 1917
Lot 8624, Section 64
2314 Pending Road
Kuching, SARAWAK
Tel: 35299
Telex: 70904 PROMAL MA
Cable: PROTELENG

MALTA

Phillip Toledo Ltd.
Kirkkara P.O. Box 11
Notabile Rd.
MIRABEL
Tel: 447 47 455 66, 49 15 25
Telex: Media MW 849

MAURITIUS

Blanche Birger Co. Ltd.
18, James Koenig Street
PORT LOUIS
Tel: 20828
Telex: 4296

MEXICO

Hewlett-Packard de Mexico,
S.A. de C.V.
Rio No. No. 4049 Desp. 12
FRACC. Cordoba
JIMANEZ, Mexico
Tel: 151-3-15-62
Hewlett-Packard de Mexico,
S.A. de C.V.
Condominio Kadereya
Circulo del Mazon No. 166 Desp. 6
Col. Del Prado - 78000
QRO, Mexico
Tel: 483-4-02-71
Hewlett-Packard de Mexico,
S.A. de C.V.
Monte Morelos No. 299
Fraccionamiento Loma Bonita 45060
QUADALAJARA, Jalisco
Tel: 38-31-48-00
Telex: 0654 186 ECOMEX

Hewlett-Packard de Mexico,
S.A. de C.V.
Monte Morelos No. 111
Lomas de Chapultepec
11000 MEXICO, D.F.
Tel: (005) 386-79-33
Telex: 17-74-507 HEWPAC MEX

Hewlett-Packard de Mexico,
S.A. de C.V.
Czda. del Valle
409 Ote. 4th Piso
Colonia del Valle
Municipio de Garcia
86200 NUEVO LECHE
Tel: 83-78-42-40
Telex: 382410 HPMY

MOROCCO

Etablissement Hubert Dolbeau & Fils
81 rue Karatchi
B.P. 11153
CASABLANCA
Tel: 3041-82, 3088-38
Telex: 23051, 22822
Gerep
2, rue Agadir
Bordj Portail 156
CASABLANCA 01
Tel: 272093, 272095
Telex: 23 739
Sema-Moroc
Dept. Senc
8, rue Lagabla
CASABLANCA
Tel: 250980
Telex: 21841

MOROCCO

Etablissement Hubert Dolbeau & Fils
81 rue Karatchi
B.P. 11153
CASABLANCA
Tel: 3041-82, 3088-38
Telex: 23051, 22822
Gerep
2, rue Agadir
Bordj Portail 156
CASABLANCA 01
Tel: 272093, 272095
Telex: 23 739
Sema-Moroc
Dept. Senc
8, rue Lagabla
CASABLANCA
Tel: 250980
Telex: 21841

NETHERLANDS

Hewlett-Packard Nederland B.V.
Startbasen 16
NL-1187 XR AMSTELVEEN
P.O. Box 667
NL-1180 AR AMSTELVEEN
Tel: (020) 547-6911
Telex: 33 216 HEPAN NL
Hewlett-Packard Nederland B.V.
Bongerd 2
P.O. Box 41
NL 2900AA CAPELLE A/D IJSEL
Tel: 31-20-51-6444
Telex: 21261 HEPAC NL
Hewlett-Packard Nederland B.V.
Pastoor-Peterstraat: 134-136
P.O. Box 2342
NL 5800 CH EINDHOVEN
Tel: 31-40-32-6911
Telex: 51464 hepaa nl

NEW ZEALAND

Hewlett-Packard (N.Z.) Ltd.
5 Owen Road
P.O. Box 26-189
Epsom, AUCKLAND
Tel: 64-9-687-1195
Cable: HCWPAK Auckland

Hewlett-Packard (N.Z.) Ltd.
184-180 Willis Street
WELLINGTON
P.O. Box 9443
Courtenay Place, WELLINGTON 3
Tel: 877 199
Cable: HEWPAC Wellington

NEW ZEALAND

Northrop Instruments & Systems Ltd.
131 Khyber Pass Road
Northrup House - 2nd Floor
Private Bag
Newmarket, AUCKLAND
Tel: 794-091
Telex: 50505
Northrop Instruments & Systems Ltd.
110 Mandeville St.
P.O. Box 8386
CHRISTCHURCH
Tel: 488-873
Telex: 4203

NEW ZEALAND

Northrop Instruments & Systems Ltd.
Sturdee House
85-87 Otago Street
P.O. Box 2406
WELLINGTON
Tel: 850-091
Telex: NZ 3380
NIGERIA
Elmecc Nigeria Ltd.
45 Saka Tirubri St.
Victoria Island
LAGOS
Tel: 61-98-94
Telex: 20-117

NORTHERN IRELAND

See United Kingdom

NORWAY

Hewlett-Packard Norway A/S
Oestermøllen 16-18
P.O. Box 34
N-1345 ØSTERÅS
Tel: 47-2-24-6000
Telex: 78821 hpnas n
Hewlett-Packard Norway A/S
Boomerget 42
Box 2470
N-5037 BOLHEIMSVIK
Tel: 0047/5/29 00 90
Hewlett-Packard Norway A/S
Bændet 2
N-4006 BIVANGER
Tel: 47-4-52-29-03
Tel: 47-4-52-09-39
Hewlett-Packard Norway A/S
Suppenn 5
P.O. Box 1508, Nittervoll
N-7002 TRONDHEIM
Tel: 47-7-98-47-75
Telex: 47-7-98-47-76

OMAN

Khaimji Baidas
P.O. Box 19
MUSCAT/SULTANATE OF OMAN
Tel: 795 901
Telex: 3489 BROKER MB MUSCAT

Suhail & Saud Bahwan
P.O. Box 189
MUSCAT/SULTANATE OF OMAN
Tel: 734 201-3
Telex: 5274 BAHWAN MB
Imtac LLC
P.O. Box 9196
MMA AL FANAL/SULTANATE
OF OMAN
Tel: 70-77-27, 70-77-23
Telex: 3855 Tawoos On

OMAN

Mushko & Company Ltd.
House No. 16, Street No. 16
Sector F-6/3
ISLAMABAD
Tel: 624545
Telex: 54001 Mushko Pk
Cable: FEMUS Islamabad
Mushko & Company Ltd.
Cosmas Chambers
Abdullah-Haroon Road
KARACHI 6302
Tel: 524131, 524132
Telex: 2894 MUSKO PK
Cable: COOPERATOR Karachi

OMAN

Mushko & Company Ltd.
House No. 16, Street No. 16
Sector F-6/3
ISLAMABAD
Tel: 624545
Telex: 54001 Mushko Pk
Cable: FEMUS Islamabad
Mushko & Company Ltd.
Cosmas Chambers
Abdullah-Haroon Road
KARACHI 6302
Tel: 524131, 524132
Telex: 2894 MUSKO PK
Cable: COOPERATOR Karachi

PANAMA

Electronico Balboa, S.A.
Calle Samuel Lewis, Ed. Alfa
Apartado 4929
PANAMA CITY
Tel: 9-011-507-436613
Telex: 368 3483 ELECTRON PG
PERU
Cia Electro Médica S.A. (ERMED)
Los Flamingos 145, Otc. 301/2
San Isidro
Castilla 1030
LIMA 1 Peru
Tel: 9-011-511-4-414325, 41-3705
Telex: 39425257 PE PB SIS
SAMS S.A.
Avenida Republica de Panama 3534
San Isidro, LIMA
Tel: 9-011-511-4-229332/413964/
413226
Telex: 39420450 PE LIBERTAD

PANAMA

Electronico Balboa, S.A.
Calle Samuel Lewis, Ed. Alfa
Apartado 4929
PANAMA CITY
Tel: 9-011-507-436613
Telex: 368 3483 ELECTRON PG
PERU
Cia Electro Médica S.A. (ERMED)
Los Flamingos 145, Otc. 301/2
San Isidro
Castilla 1030
LIMA 1 Peru
Tel: 9-011-511-4-414325, 41-3705
Telex: 39425257 PE PB SIS
SAMS S.A.
Avenida Republica de Panama 3534
San Isidro, LIMA
Tel: 9-011-511-4-229332/413964/
413226
Telex: 39420450 PE LIBERTAD

PHILIPPINES

The Online Advanced Systems Corp.
2nd Floor, Electric House
115-117 Esteban Street
P.O. Box 1510
Lagassi Village, Makati
Metro MANILA
Tel: 815-35-10 (up to 16)
Telex: 63274 ONLINE PN

PORTUGAL

Mundinter Intercombio
Mundial de Comercio S.A.R.L.
Av. Antonio Augusto Aguiar 138
Apartado 2761
LISBON
Tel: (19) 53-21-01, 53-21-37
Telex: 16601 munter p

Sogimica
Av. da Liberdade, 220-2
1298 LISBOA Codex
Tel: 58-21-82
Telex: 13316 SABASA

PORTUGAL

Telectra-Empresa Técnica de
Equipamentos Eléctricos S.A.R.L.
Rua Rodrigo da Fonseca 103
P.O. Box 25031
LISBON 1
Tel: (19) 60-60-72
Telex: 12596
C.P.C.S.I.
Rua de Costa Cabral 575
4200 PORTO
P.O. Box 499174/495173
Telex: 26054

PORTUGAL

Telectra-Empresa Técnica de
Equipamentos Eléctricos S.A.R.L.
Rua Rodrigo da Fonseca 103
P.O. Box 25031
LISBON 1
Tel: (19) 60-60-72
Telex: 12596
C.P.C.S.I.
Rua de Costa Cabral 575
4200 PORTO
P.O. Box 499174/495173
Telex: 26054

PUERTO RICO

Hewlett-Packard Puerto Rico
101 Muñoz Rivera Av.
Esu. Calle Ocho
HATO REY, Puerto Rico 00918
Tel: (809) 754-7800

QATAR

Computer Arabia
P.O. Box 2750
DONIA
Tel: 428555
Telex: 4586 CHPRAB
Haseer Trading & Contracting
P.O. Box 1565
DONIA
Tel: 422170
Telex: 4439 NASSER DH

QATAR

Computer Arabia
P.O. Box 2750
DONIA
Tel: 428555
Telex: 4586 CHPRAB
Haseer Trading & Contracting
P.O. Box 1565
DONIA
Tel: 422170
Telex: 4439 NASSER DH

SAUDI ARABIA

Modern Electronics Establishment
Hewlett-Packard Division
P.O. Box 281
Thuabali
AL-KHOBAR 31952
Tel: 895-1700, 895-1764
Telex: 6711 106 HPMEEK SJ
Cable: ELECTA AL-KHOBAR
Modern Electronics Establishment
Hewlett-Packard Division
P.O. Box 1228
Rodeo Plaza, 6th Floor
JEDDAH
Tel: 644 96 28
Telex: 4027 12 FARNAS SJ
Cable: ELECTA JEDDAH
Modern Electronics Establishment
Hewlett-Packard Division
P.O. Box 22315
RIYADH 11465
Tel: 491-97 15, 491-83 87
Telex: 202048 MEERYD SJ

SAUDI ARABIA

Modern Electronics Establishment
Hewlett-Packard Division
P.O. Box 281
Thuabali
AL-KHOBAR 31952
Tel: 895-1700, 895-1764
Telex: 6711 106 HPMEEK SJ
Cable: ELECTA AL-KHOBAR
Modern Electronics Establishment
Hewlett-Packard Division
P.O. Box 1228
Rodeo Plaza, 6th Floor
JEDDAH
Tel: 644 96 28
Telex: 4027 12 FARNAS SJ
Cable: ELECTA JEDDAH
Modern Electronics Establishment
Hewlett-Packard Division
P.O. Box 22315
RIYADH 11465
Tel: 491-97 15, 491-83 87
Telex: 202048 MEERYD SJ

SALES OFFICES

Arranged alphabetically by country (cont'd)

SAUDI ARABIA (Cont'd)

Abdul Qhadi El Ajo Corp.
P.O. Box 78
RIYADH
Tel: 40 41 717
Telex: 200 532 EL AJOU

SCOTLAND See United Kingdom

SENEGAL

Societe Husson Ayad & Cie
76, Avenue Georges Pompidou
B.P. 305
DAKAR
Tel: 32339
Cable: AYAD Dakar

Monoger Distribution S.A.
1, Rue Parent
B.P. 146
DAKAR
Tel: 215 671
Telex: 587

Systeme Service Conseil (SSC)
14, Avenue du Parachosis
DAKAR ETIOLE
Tel: 21 9976
Telex: 577

Singapore
Hewlett-Packard Singapore (Sales)
Pte. Ltd.
1180 Depot Road
SINGAPORE, 0410
Tel: 273 7388
Telex: 34209 HPSGSO RS
Cable: HEWPACK, Singapore

Dynamar International Ltd.
Unit 05-11 Block 8
Kohlan Ayer Industrial Estate
SINGAPORE, 1334
Tel: 747-6188
Telex: 26283 RS

SINGAPORE

Hewlett-Packard Sverige AB
Ostra Tulgatan 3
S-20011 **MALMO**
Box 6132
Tel: 46-40-702-70
Telex: (854) 17886 (via Spanga office)

Hewlett-Packard Sverige AB
Elementvagen 16
S-7022 **OREBRO**
Tel: 49-019-10-4820
Telex: (854) 17886 (via Spanga office)

Hewlett-Packard Sverige AB
Skaalholmgatan 9, Kista
P.O. Box 19
S-16383 **SPANGA**
Tel: (08) 750-2000
Telex: (854) 17886
Teletex: (08) 7527781

Hewlett-Packard Sverige AB
Topasgatan 1A
S-42 123 **VASTRA-FRÖLUNDA**
(Göteborg)
Tel: 46-031-89-1000
Telex: (854) 17886 (via Spanga office)

SWEDEN

Hewlett-Packard Sverige AB
Ostra Tulgatan 3
S-20011 **MALMO**
Box 6132
Tel: 46-40-702-70
Telex: (854) 17886 (via Spanga office)

Hewlett-Packard Sverige AB
Elementvagen 16
S-7022 **OREBRO**
Tel: 49-019-10-4820
Telex: (854) 17886 (via Spanga office)

Hewlett-Packard Sverige AB
Skaalholmgatan 9, Kista
P.O. Box 19
S-16383 **SPANGA**
Tel: (08) 750-2000
Telex: (854) 17886
Teletex: (08) 7527781

Hewlett-Packard Sverige AB
Topasgatan 1A
S-42 123 **VASTRA-FRÖLUNDA**
(Göteborg)
Tel: 46-031-89-1000
Telex: (854) 17886 (via Spanga office)

Hewlett-Packard So Africa (Pty.) Ltd.
2nd Floor Juniper House
92 Overport Drive
DURBAN 4067
Tel: 27-31-28-4178
Telex: 6-22954

Hewlett-Packard So Africa (Pty.) Ltd.
Shop 6 Linton Arcade
511 Cape Road
Linton Grange
PORT ELIZABETH 6001
Tel: 27 141 130 1201
Telex: 24-2916

Hewlett-Packard So Africa (Pty.) Ltd.
Fountain Center
Kalkoen Str.
Monument Park Ext 2
PRETORIA 0105
Tel: (012) 45 5725
Telex: 32163

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

Hewlett-Packard So Africa (Pty.) Ltd.
Private Bag Wendywood
BANDTOWN 2144
Tel: 27-11-802-5111, 27-11-802-5125
Telex: 4-20877 SA
Cable: HEWPACK, Johannesburg

SPAIN

Hewlett-Packard Española, S.A.
Calle Entenza, 321
E-BARCELONA 29
Tel: 31222 24 51, 321 73 54
Telex: 52803 hpsoee

Hewlett-Packard Española, S.A.
Calle San Vicente S/N
Edificio Albia 16-7B
48001 **BILBAO**
Tel: 41423 83 06

Hewlett-Packard Española, S.A.
Ctra. N-VI, Km. 16, 400
Las Rozas
E-MADRID
Tel: 116 637 00 11
Telex: 23516 HPE

Hewlett-Packard Española, S.A.
Avda. S. Francisco Javier, S/N
Planta 10, Edificio Sevilla 2
E-SEVILLA 3, SPAIN
Tel: 54164 44 54
Telex: 72933

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

Hewlett-Packard Española, S.A.
Edificio La Católica, 8
E-46004 **VALENCIA**
Tel: 34-6-361 1354
Telex: 63435

Hewlett-Packard Española, S.A.
Av. de Zugazarte, 8
Las Arenas-Guecho
E-48930 **VIZCAYA**
VIZCAYA
Tel: 34-423-83 06
Telex: 33032

SUDAN

Mediterranean Engineering
& Trading Co. Ltd.
P.O. Box 1025
KHARTOUM
Tel: 41 164
Telex: 24052

SWITZERLAND

Hewlett-Packard (Schweiz) AG
Clarastrasse 12
CH-4050 **BASEL**
Tel: 41-61-83-5920

Hewlett-Packard (Schweiz) AG
7, rue du Bois-du-Lan
Case postale 365-1366
CH-1217 **MEYRIN 1**
Tel: (0041) 22-83-8-11
Telex: 27353 HPAG CH

Hewlett-Packard (Schweiz) AG
Aimand 2
CH-8567 **WIDEN**
Tel: 41-57-31-2111
Telex: 53933 hpag ch
Cable: HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-315-8181
Telex: 823 537 HPAG CH

Hewlett-Packard (Schweiz) AG
Schwamendingenstrasse 10
CH-8050 **ZÜRICH**
Tel: 41-1-31

Hewlett-Packard Ltd.
9 Bridwell Place
LONDON EC4V 6DS
Tel: 44-01-583-6565
Telex: 294163

Hewlett-Packard Ltd
Postelact Road
NORMANTON
West Yorkshire WF6 1RN
Tel: 44-924-855 596
Telex: 537355

Hewlett-Packard Ltd.
The Quadrangle
106-116 Station Road
REDHILL, Surrey RH1 1PS
Tel: 44-737-666-55
Telex: 947234

Hewlett-Packard Ltd.
Avon House
435 Stratford Road
Shirley, SOLIHULL, West Midlands
B90 4BL
Tel: 44-21-745-8800
Telex: 339105

Hewlett-Packard Ltd
Heathside Park Road
Chesham Heath, Stockport
SK3 0RB, United Kingdom
Tel: 44-061-428-0828
Telex: 668066

Hewlett-Packard Ltd.
Harman House
No. 1 George Street
LIVERPOOL, Merseyside UB8 1YH
Tel: 895 720 20
Telex: 892134/5

Hewlett-Packard Ltd
King Street Lane
Winnipeg, WOKINGHAM
Surrey RH1 1SR
Tel: 44-734-777-626
Telex: 8471789

Hewlett-Packard Ltd.
113 Springham Place
College Milton North
EAST KILBRIDE, G74 5NU
Tel: 041-332-6232
Telex: 779615

Hewlett-Packard Ltd.
7405 Hollister Ave. #A
GOLETA, CA 93117
Tel: (805) 665-6100
Fax: (805) 665-6163

Hewlett-Packard Co.
9800 Marlands Ave.
IRVINE, CA 92718
Tel: (714) 472-3000
Fax: (714) 581-3607

Hewlett-Packard Co.
1421 S. Manhattan Av.
FULLERTON, CA 92631
Tel: (714) 999-6700
Fax: (714) 778-3033

Hewlett-Packard Co.
353 Lakeside Dr
FOSTER CITY, CA 94404
Tel: (415) 378-8400
Fax: (415) 378-8405

Hewlett-Packard Co.
1907 North Gateway Blvd
FRESNO, CA 93727
Tel: (209) 252-9652
Fax: (209) 456-9302

Hewlett-Packard Co.
3087 Parway Lane
Suite 300
WORCROSS, GA 30092
Tel: (404) 448-1894
Fax: (404) 248-5206

Hewlett-Packard Co.
3087 Parway Lane
Suite 300
WORCROSS, GA 30092
Tel: (404) 448-1894
Fax: (404) 248-5206

Hewlett-Packard Co.
2945 Center Green Court South
Suite A
BOULDER, CO 80301
Tel: (303) 499-6655
Fax: (303) 938-3025

Hewlett-Packard Co.
24 Inverness Place, East
ENGLEWOOD, CO 80112
Tel: (303) 649-5000
Fax: (303) 649-5787

Hewlett-Packard Co.
3 Parkland Dr
DANIEL, CT 06620
Tel: (203) 656-0040
Fax: (203) 656-3563

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
2525 Grand Avenue
LONG BEACH, CA 90815
Tel: (213) 498-1111
Fax: (213) 494-1886

Hewlett-Packard Co.
5651 West Manchester Ave.
LOS ANGELES, CA 90009
Tel: (213) 537-8000
Fax: (213) 537-8338

Hewlett-Packard Co.
321 E. Evelyn Ave.
Bldg 330
MOUNTAIN VIEW, CA 94039
Tel: (415) 694-2000
Fax: (415) 694-0600

Hewlett-Packard Co.
5181 Lankenham Blvd
NORTH HOLLYWOOD, CA 91601
Tel: (818) 505-5600
Fax: (818) 505-5875

Hewlett-Packard Co.
5725 W. Las Positas Blvd
PLEASANTON, CA 94586
Tel: (415) 480-0262
Fax: (415) 469-0713

Hewlett-Packard Co.
4244 So. Market Court, Suite A
SACRAMENTO, CA 95852
Tel: (916) 929-7222
Fax: (916) 927-7152

Hewlett-Packard Co.
9606 Aero Drive
SAN DIEGO, CA 92123
Tel: (619) 273-2200
Fax: (619) 541-7376

Hewlett-Packard Co.
50 Fremont St. Suite 200
SAN FRANCISCO, CA 94105
Tel: (415) 882-6800
Fax: (415) 882-6605

Hewlett-Packard Co.
3003 Scott Boulevard
SANTA CLARA, CA 95054
Tel: (408) 986-7000
Fax: (408) 986-7103

Hewlett-Packard Co.
5280 Valentine Rd. Suite 205
VENTURA, CA 93003
Tel: (805) 656-8899
Fax: (805) 656-0721

Hewlett-Packard Co.
2945 Center Green Court South
Suite A
BOULDER, CO 80301
Tel: (303) 499-6655
Fax: (303) 938-3025

Hewlett-Packard Co.
24 Inverness Place, East
ENGLEWOOD, CO 80112
Tel: (303) 649-5000
Fax: (303) 649-5787

Hewlett-Packard Co.
3 Parkland Dr
DANIEL, CT 06620
Tel: (203) 656-0040
Fax: (203) 656-3563

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
GLASTONBURY, CT 06033
Tel: (203) 633-8100
Fax: (203) 639-6087

Hewlett-Packard Co.
5900 N. Andrews, Suite 100
FORT LAUDERDALE, FL 33309
Tel: (352) 936-8800
Fax: (352) 936-2293

Hewlett-Packard Co.
6600 South Point Parkway
Suite 301
JACKSONVILLE, FL 32216
Tel: (904) 636-9965
Fax: (904) 636-9955

Hewlett-Packard Co.
255 East Drive, Suite B
MELBOURNE, FL 32901
Tel: (407) 729-0704
Fax: (407) 723-4557

Hewlett-Packard Co.
5177 Lake Eleanor Drive
ORLANDO, FL 32809
Tel: (407) 659-2906
Fax: (407) 628-8309 (2)

Hewlett-Packard Co.
4700 Bayou Blvd.
Building 5
PENSACOLA, FL 32503
Tel: (904) 476-8422
Fax: (904) 476-4116

Hewlett-Packard Co.
5550 Kiewit, #150
TAMPA, FL 33634
Tel: (813) 884-3282
Fax: (813) 889-4445

Hewlett-Packard Co.
2015 South Park Place
ATLANTA, GA 30339
Tel: (404) 955-1500
Fax: (404) 900-7669

Hewlett-Packard Co.
3807 Parway Lane
Suite 300
WORCROSS, GA 30092
Tel: (404) 448-1894
Fax: (404) 248-5206

Hewlett-Packard Co.
1001 Bishop St.
Suite 2400
HONOLULU, HI 96813
Tel: (808) 526-1555
Fax: (808) 536-7873

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
GLASTONBURY, CT 06033
Tel: (203) 633-8100
Fax: (203) 639-6087

Hewlett-Packard Co.
5900 N. Andrews, Suite 100
FORT LAUDERDALE, FL 33309
Tel: (352) 936-8800
Fax: (352) 936-2293

Hewlett-Packard Co.
6600 South Point Parkway
Suite 301
JACKSONVILLE, FL 32216
Tel: (904) 636-9965
Fax: (904) 636-9955

Hewlett-Packard Co.
255 East Drive, Suite B
MELBOURNE, FL 32901
Tel: (407) 729-0704
Fax: (407) 723-4557

Hewlett-Packard Co.
5177 Lake Eleanor Drive
ORLANDO, FL 32809
Tel: (407) 659-2906
Fax: (407) 628-8309 (2)

Hewlett-Packard Co.
4700 Bayou Blvd.
Building 5
PENSACOLA, FL 32503
Tel: (904) 476-8422
Fax: (904) 476-4116

Hewlett-Packard Co.
5550 Kiewit, #150
TAMPA, FL 33634
Tel: (813) 884-3282
Fax: (813) 889-4445

Hewlett-Packard Co.
2015 South Park Place
ATLANTA, GA 30339
Tel: (404) 955-1500
Fax: (404) 900-7669

Hewlett-Packard Co.
3807 Parway Lane
Suite 300
WORCROSS, GA 30092
Tel: (404) 448-1894
Fax: (404) 248-5206

Hewlett-Packard Co.
1001 Bishop St.
Suite 2400
HONOLULU, HI 96813
Tel: (808) 526-1555
Fax: (808) 536-7873

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
2205 E. Empire St
BLOOMINGTON, IL 61704
Tel: (309) 662-9411
Fax: (309) 662-0351

Hewlett-Packard Co.
525 W. Monroe St., Suite 1308
CHICAGO, IL 60606
Tel: (312) 936-0010
Fax: (312) 936-0886

Hewlett-Packard Co.
1200 East Dahl Road
NAPEVILLE, IL 60566
Tel: (312) 357-8800
Fax: (312) 357-9896

Hewlett-Packard Co.
5201 Tishine Drive
ROLLING MEADOWS, IL 60008
Tel: (312) 255-8800
Fax: (312) 259-5878

Hewlett-Packard Co.
11911 N. Meridian St.
CARMEL, IN 46022
Tel: (317) 844-4100
Fax: (317) 844-1291

Hewlett-Packard Co.
111 E. Ludwig Road
Suite 108
FT. WAYNE, IN 46825
Tel: (219) 482-4283
Fax: (219) 482-9907

Hewlett-Packard Co.
4950 River Courts Dr
CEDAR RAPIDS, IA 52402
Tel: (319) 393-0606
Fax: (319) 378-1024

Hewlett-Packard Co.
4201 Corporate Dr
WEST DES MOINES, IA 50265
Tel: (515) 224-1425
Fax: (515) 224-1870

Hewlett-Packard Co.
North Rock Business Park
2456 N. Rock Rd
Suite 300
WICHITA, KS 67226
Tel: (316) 658-4040
Fax: (316) 652-8155

Hewlett-Packard Co.
305 N. Humboldt Lane,
Suite 100
LOUISVILLE, KY 40222
Tel: (502) 426-0100
Fax: (502) 426-0322

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
160 James Drive East
ST. ROSE, LA 70087
Tel: (504) 467-4100
Fax: (504) 467-4100 x 5886

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

Hewlett-Packard Co.
11500 Chinden Blvd
BOISE, ID 83707
Tel: (208) 323-2700
Fax: (208) 323-2528

SALES OFFICES

Arranged alphabetically by country (cont'd)

UNITED STATES (Cont'd)

Maryland

Hewlett-Packard Co.
3701 Koppers Street
BALTIMORE, MD 21227
Tel: (301) 544-5800
Fax: (301) 362-7650

Hewlett-Packard Co.
2 Choke Cherry Road
ROCKVILLE, MD 20850
Tel: (301) 948-8370
Fax: (301) 258-5988

Massachusetts

Hewlett-Packard Co.
1775 Minuteman Road
ANDOVER, MA 01810
Tel: (617) 682-1500
Fax: (617) 682-1500 x 2619

Hewlett-Packard Co.
29 Burlington Mall Rd
BURLINGTON, MA 01803-4514
Tel: (617) 270-7000
Fax: (617) 221-5240

Michigan

Hewlett-Packard Co.
3333 Orchard Vista S.E.
GRAND RAPIDS, MI 49506
Tel: (616) 957-1970
Fax: (616) 955-9022

Hewlett-Packard Co.
39550 Orchard Hill Place Drive
NOVI, MI 48050
Tel: (313) 349-9200
Fax: (313) 349-9240

Hewlett-Packard Co.
553 Kears Rd.
Suite 101
TROY, MI 48064
Tel: (313) 362-5180
Fax: (313) 362-3028

Minnesota

Hewlett-Packard Co.
2025 W. Larpenteur Ave.
ST. PAUL, MN 55113
Tel: (612) 644-1100
Fax: (612) 344-5273

Mississippi

Hewlett-Packard Co.
1675 Lakeland Dr., Suite 102
JACKSON, MS 39216
Tel: (601) 982-3055
Fax: (601) 982-8958

Missouri

Hewlett-Packard Co.
6813 Westchester Ave.
KANSAS CITY, MO 64131
Tel: (816) 737-0071
Fax: (816) 737-4590

Hewlett-Packard Co.
13001 Hokenberg Drive
BRIDGETON, MO 63044
Tel: (314) 344-5100
Fax: (314) 344-5273

Nebraska

Hewlett-Packard
11626 Nicholas St.
OMAHA, NE 68134
Tel: (402) 493-0300
Fax: (402) 493-4334

New Jersey

Hewlett-Packard Co.
123 W. Century Road
PARAMUS, NJ 07652
Tel: (201) 265-5000
Fax: (201) 999-5382

Hewlett-Packard Co.
10 Silyn Way
PARSIPpany, NJ 07054
Tel: (401) 682-4000
Fax: (401) 682-4001

Hewlett-Packard Co.
20 New England Av. West
PISCATAWAY, NJ 08854
Tel: (201) 562-6100
Fax: (201) 562-6246

New Mexico

Hewlett-Packard Co.
7801 Jefferson N.E.
ALBUQUERQUE, NM 87109
Tel: (505) 823-6100
Fax: (505) 823-1243

Hewlett-Packard Co.
1362-C Trinity Dr.
LOS ALAMOS, NM 87544
Tel: (505) 662-6700
Fax: (505) 662-4312

New York

Hewlett-Packard Co.
5 Computer Drive South
ALBANY, NY 12205
Tel: (518) 458-1550
Fax: (518) 458-1550 x 0393

Hewlett-Packard Co.
130 John Muir Dr.
AMHERST, NY 14226
Tel: (716) 689-3003
Fax: (716) 636-7034

Hewlett-Packard Co.
200 Cross Keys Office Park
FAIRPORT, NY 14450
Tel: (716) 223-9950
Fax: (716) 223-6031

Hewlett-Packard Co.
7841 Henry Clay Blvd.
LIVERPOOL, NY 13068
Tel: (315) 451-1820
Fax: (315) 451-1820 x 255

Hewlett-Packard Co.
No. 1 Pennsylvania Plaza
25th Floor
34th Street & 7th Avenue
MANHATTAN, NY 10119
Tel: (212) 971-0800
Fax: (212) 330-6967

Hewlett-Packard Co.
Executive Square Office Bldg.
66 Middlebush Rd.
WAPPINGERS FALLS, NY 12590
Tel: (914) 298-8125
Fax: (914) 298-9154

Hewlett-Packard Co.
2875 Westchester Ave
PURCHASE, NY 10577
Tel: (914) 935-6300
Fax: (914) 935-6697

Hewlett-Packard Co.
3 Crossways Park West
WOODBURY, NY 11797
Tel: (516) 662-7800
Fax: (516) 662-7808 (2)

North Carolina

Hewlett-Packard Co.
305 Gregson Dr.
CARY, NC 27511
Tel: (919) 461-6600
Fax: (919) 469-8441

Hewlett-Packard Co.
9401 Arrow Point Blvd
Suite 100
CHARLOTTE, NC 28217
Tel: (704) 527-8780
Fax: (704) 523-7657

Hewlett-Packard Co.
6605 Roanoke Way
GREENSBORO, NC 27420
Tel: (919) 852-1800
Fax: (919) 547-1997

Ohio

Hewlett-Packard Co.
2717 S. Arlington Road
AKRON, OH 44312
Tel: (216) 644-2270
Fax: (216) 644-7415

Hewlett-Packard Co.
4501 Eskine Road
CINCINNATI, OH 45242
Tel: (513) 891-9870
Fax: (513) 891-0033

Hewlett-Packard Co.
15885 Sprague Road
STRONGSVILLE, OH 44136
Tel: (216) 243-7300
Fax: (216) 234-7230

Hewlett-Packard Co.
9060 Springboro Pike
MIAMSBURG, OH 45342
Tel: (513) 433-2223
Fax: (513) 433-3630

Hewlett-Packard Co.
One Maritime Plaza, 5th Floor
720 Water Street
TOLEDO, OH 43604
Tel: (419) 242-2200
Fax: (419) 241-7655

Hewlett-Packard Co.
673 Brockage Blvd.
WESTERVILLE, OH 43081
Tel: (614) 891-3344
Fax: (614) 891-1476

Oklahoma

Hewlett-Packard Co.
3525 N.W. 56th St.
Suite C-100
OKLAHOMA CITY, OK 73112
Tel: (405) 946-5489
Fax: (405) 942-1127

Hewlett-Packard Co.
6655 South Lewis,
Suite 105
TULSA, OK 74138
Tel: (918) 481-6700
Fax: (918) 481-2250

Oregon

Hewlett-Packard Co.
9255 S. W. Pioneer Court
WILSONVILLE, OR 97070
Tel: (503) 682-8000
Fax: (503) 682-8155

Pennsylvania

Hewlett-Packard Co.
Heatherwood Industrial Park
50 Dorchester Rd.
HARRISBURG, PA 17112
Tel: (717) 657-5900
Fax: (717) 657-5946

Hewlett-Packard Co.
111 Zeta Drive
PITTSBURGH, PA 15238
Tel: (412) 782-0400
Fax: (412) 963-1300

Hewlett-Packard Co.
2350 Monroe Boulevard
VALLEY Forge, PA 19422
Tel: (215) 666-9000
Fax: (215) 666-2034

South Carolina

Hewlett-Packard Co.
Brookside Park, Suite 122
1 Harborson Way
COLUMBIA, SC 29210
Tel: (803) 732-0400
Fax: (803) 732-0606

Hewlett-Packard Co.
545 N. Pleasantburg Dr.
Suite 100
GREENVILLE, SC 29607
Tel: (803) 232-6002
Fax: (803) 232-6738

Tennessee

Hewlett-Packard Co.
One Energy Cntr., Suite 200
Pellissippi Pkwy.
KNOXVILLE, TN 37932
Tel: (615) 966-4747
Fax: (615) 966-4747 x 138

Hewlett-Packard Co.
889 Ridge Lake Blvd.,
Suite 100
MEMPHIS, TN 38119
Tel: (901) 763-4747
Fax: (901) 762-9723

Hewlett-Packard Co.
44 Vantage Way,
Suite 160
NASHVILLE, TN 37228
Tel: (615) 255-1271
Fax: (615) 726-2310

Texas

Hewlett-Packard Co.
1825-P Kramer Lane
AUSTIN, TX 78758
Tel: (512) 835-6771
Fax: (512) 835-6739

Hewlett-Packard Co.
5700 Cromo Dr
EL PASO, TX 79912
Tel: (915) 833-4400
Fax: (915) 581-8097

Houston

Hewlett-Packard Co.
10535 Harmon Drive
HOUSTON, TX 77036
Tel: (713) 776-6400
Fax: (713) 776-6495

Hewlett-Packard Co.
3301 West Royal Lane
IRVING, TX 75063
Tel: (214) 869-3377
Fax: (214) 830-8951

Hewlett-Packard Co.
109 E. Toronto, Suite 100
MCALLEN, TX 78501
Tel: (512) 630-3030
Fax: (512) 630-1355

Hewlett-Packard Co.
930 E. Campbell Rd.
RICHARDSON, TX 75081
Tel: (214) 231-6101
Fax: (214) 699-4437

Hewlett-Packard Co.
14100 San Pedro Ave., Suite 100
SAN ANTONIO, TX 78233
Tel: (512) 494-9336
Fax: (512) 491-1299

Utah

Hewlett-Packard Co.
2930 W. 2100 South St.
SALT LAKE CITY, UT 84130
Tel: (801) 974-1700
Fax: (801) 974-1780

Virginia

Hewlett-Packard Co.
840 Greenbrier Circle
Suite 101
CHESAPEAKE, VA 23320
Tel: (804) 424-7105
Fax: (804) 424-1694

Hewlett-Packard Co.
4305 Cox Road
GLENN ALLEN, VA 23060
Tel: (804) 747-7750
Fax: (804) 747-6580

Hewlett-Packard Co.
2800 Electric Road Suite 100
ROANOKE, VA 24019
Tel: (703) 774-5444
Fax: (703) 989-6049

Washington

Hewlett-Packard Co.
1515 S.E. 31st Street
BELLEVUE, WA 98006
Tel: (206) 643-4000
Fax: (206) 643-8748

Hewlett-Packard Co.
N. 1225 Argonne Rd
SPOKANE, WA 99212
Tel: (509) 922-7000
Fax: (509) 922-6236

West Virginia

Hewlett-Packard Co.
501 56th Street
CHARLESTON, WV 25304
Tel: (304) 925-0492
Fax: (304) 925-1910

Wisconsin

Hewlett-Packard Co.
275 N. Corporate Dr.
BROOKFIELD, WI 53005
Tel: (414) 792-8800
Fax: (414) 792-0218

URUGUAY

Pablo Ferrando S.A.C. e l.
Avenida Italia 2877
MONTEVIDEO
Casilla de Correo 370
Tel: 58-82-802-586
Telex: 398802568

Olympia de Uruguay S.A.
Maquinas de Oficina
Avenida del Libertador 1997
Casilla de Correo 6644
MONTEVIDEO
Tel: 91-1809, 88-3807
Telex: 8342 OROU UY

VENEZUELA

Hewlett-Packard de Venezuela C.A.
3A Transversal Los Ruices Norte
Edificio Segre 1-2 8 3
Apartado 50933
CARACAS 1050
Tel: (582) 239-5664
Telex: 251046 HENPACK
Analytical Supplies, CA
Quinta #103 Impermes
Av El Centro
Los Chorros
Apartado 75472
CARACAS
Tel: 364964, 2394047
Telex: 28274 CAB/C

Tecnologica Medica del Caribe, C.A.
Multicentro Empresarial del Este
Av. Libertador
Edif. Libertador
Nucleo "C" - Oficina 51-52
CARACAS
Tel: 339867/333780

Hewlett-Packard de Venezuela C.A.
Residencial Tia Betty Local 1
Avenida 3 Y con Calle 75
MARACAIBO, Estado Zulia
Apartado 2646
Tel: 586175869
Telex: 62464 HPMAR

Hewlett-Packard de Venezuela C.A.
Urb. Lomas de Este
Torre Trebol - Pao 11
VALENCIA, Estado Carabobo
Apartado 3347
Tel: (5841) 222992

YUGOSLAVIA

Do Hermes
General Zdanova 4
YU-11000 **BEOGRAD**
Tel: (011) 342 841
Telex: 11433

Do Hermes
Golovska 73
YU-61000 **LJUBLJANA**
Tel: (061) 553 170
Telex: 31580
Elektronstena
Tilova 51
YU-61000 **LJUBLJANA**

Do Hermes
Kralja Tomislava 1
YU-11000 **SARAJEVO**
Tel: (071) 35 859
Telex: 41634

ZAIRE

Computer & Industrial Engineering
25, Avenue de la Justice
B.P. 12797
KINSHASA, Gombe
Tel: 32063
Telex: 21552

ZAMBIA

R.J. Tibury (Zambia) Ltd.
P.O. Box 32792
LUSAKA
Tel: 215590
Telex: 40128

ZIMBABWE

Field Technical Sales (Private) Limited
45, Kelvin Road North
P.O. Box 3458
SALISBURY
Tel: 705 231
Telex: 4-122 RH
September 1988

