

HP LaserJet Fax

Product No. C1740A

Addendum to Product Brief

Additional Features

HP LaserJet fax adds sophisticated fax functions to your PC and HP LaserJet printer:

Autodial stations:

40 autodial stations can be programmed easily by typing names and fax numbers from the keyboard using the HP LaserJet fax software.

Broadcast:

From the HP LaserJet fax software, fax up to 50 files (PCL, PCX, TIFF, or ASCII) to up to 50 destinations automatically. Each destination can be a distribution list with up to 100 members, therefore 5000 destinations is the theoretical limit, but the practical limit is available system memory.

Fax memory:

The standard 256 kb fax memory buffers a fax of up to 13 pages of the CCITT standard page #1. Add a HP LaserJet printer 1-Mbyte Memory Board (PN HP33474B) to buffer a fax of up to 70 standard pages. The CCITT #1 standard is a simple text page. More complex pages with graphics, less white space, or higher resolution use more memory.

Multiple faxes:

If the printer is turned off, out of paper, or being used by the computer when you receive a fax, HP LaserJet fax will store the incoming fax in its internal memory. HP LaserJet fax will wait until this fax has been printed before answering another fax call. If you expect to receive multiple faxes, leave your printer and HP LaserJet fax turned on.


Phonebooks:

In the HP LaserJet fax software, create phone books with up to 1000 entries in each file, limited only by disk space. Create phonebooks and distribution lists easily by typing in names and fax numbers from the keyboard using the HP LaserJet fax software.

Paper requirements for the Automatic Document Feeder:

	Minimum	Maximum
Width:	5.9 inches 148.0 mm	8.66 inches 220.00 mm
Length:	2.9 inches 73.0 mm	39.40 inches 1000.00 mm
Weight:	16.0 lbs 60.0 g/m ²	28.00 lbs 105.00 g/m ²

Documents with a reflective, glossy, or coated finish may not correctly feed through the document feeder and alter the image quality. Documents longer than 14" (Legal Size) are not recommended.

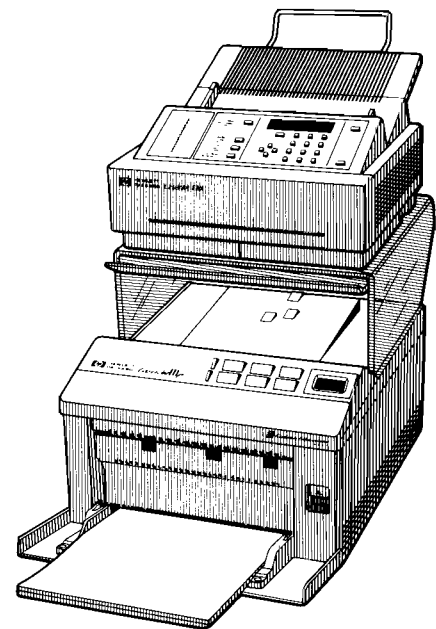

HP Computer Museum
www.hpmuseum.net

For research and education purposes only.

Power requirements:

Minimum Operating Voltage
(Vac): 108
Maximum Operating Voltage
(Vac): 132
Rated Line Current
(Amps): 0.8

Warranty:

1 year

**Using the HP LaserJet fax
Software:**

Once you install the software, you'll find it very easy to use. The process follows the same steps you use from the control panel to fax a printed page:

1. Select the file(s) you want to fax
2. Enter the destination(s)
3. Select "Go."

The HP FIRST document 3912, "Converting Application Files for HP LaserJet Fax Transmission," will show you how to prepare your files in a variety of popular applications so they are ready to fax.

Font Support:

The HP LaserJet fax software runs under DOS 3.3 and above. With it, you can fax complex documents with their true HP fonts, formatting and graphics right from the PC. By comparison, many PC fax cards support only basic fonts. With the standard HP LaserJet fax software, you can fax a document that uses any internal font of the HP LaserJet IIP printer or downloadable soft fonts.

**HP LaserJet Fax Font
Accessory Kit (PN C1741A)**

If you need a ProCollection, Microsoft, Polished Worksheets or WordPerfect font cartridge in order to print your document, then you need this optional font software package to fax the document directly from the PC.

The HP LaserJet Fax Font Accessory Kit is software on disks, not a cartridge. You install the additional fonts using "configure Fonts" in the Toolbox menu under Utilities in the HP LaserJet fax software. Once you install the optional software, you can fax documents directly from the PC using any of the cartridge fonts or soft fonts you install or the HP LaserJet IIP printer internal fonts.

More Information:

HP FIRST (Fax Information Retrieval Support Technology) is Hewlett-Packard's fax information line. Pick up the handset of your fax machine and dial (208) 344-4809 from the fax keypad. Follow the instructions and the information will be sent to your fax machine.

These documents are available:

- #3900** HP LaserJet Fax Product Brief
- #3910** Using a Shared Printer Environment
- #3911** Optimizing Fax Output Quality
- #3912** Converting Application Files for HP LaserJet Fax Transmission
- #3913** Customer Replaceable Parts

Free and Easy Fax Demo:

To receive a free sample fax on your current fax device:

1. Lift the handset of your fax device
2. Dial 1-800-LJFAX 01 (1-800-553-2901) from the fax keypad
3. Follow the instructions for a great looking fax sample sent directly to your current fax device. The sample shows the quality you can fax from your PC using HP LaserJet fax.

Technical information in this document is subject to change without notice.

Copyright ©1991
Hewlett-Packard Company

Printed in U.S.A. 7/91
5091-1418E

