


Using the Hewlett-Packard Persuasive Presentations Font Cartridge



HP Computer Museum
www.hpmuseum.net

For research and education purposes only.

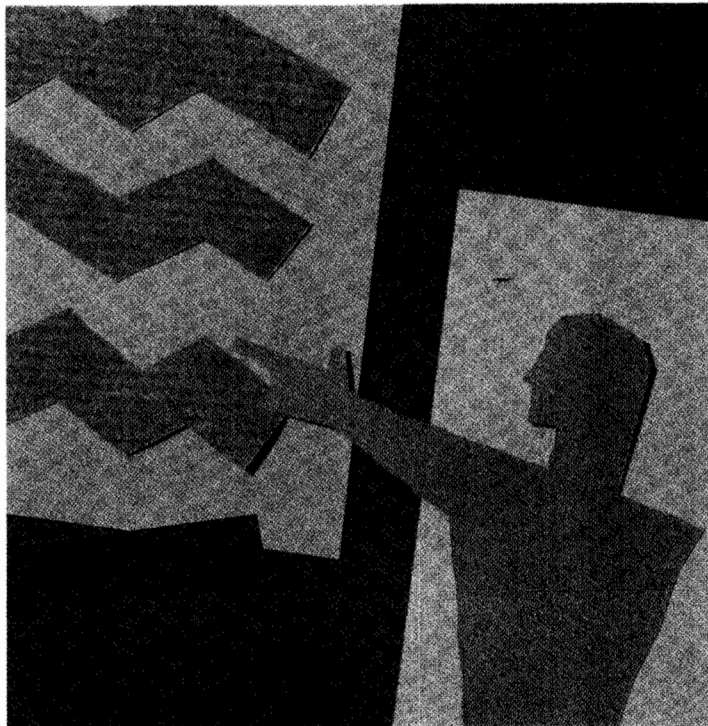

HP C2053A #C04

**Using the Hewlett-Packard
Persuasive Presentations
Font Cartridge**

C2053-90904
Printed in USA 06/89

Notice

The information in this document is subject to change without notice.

HEWLETT-PACKARD MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Hewlett-Packard shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Copyright © Hewlett-Packard Company 1989.

All rights are reserved. Reproduction, adaptation, or distribution of copies of this document is prohibited.

Ventura Publisher is a trademark of Ventura Software, Incorporated.

HP LaserJet and *PCL* are trademarks of Hewlett-Packard Company.

Serifa is a trademark of Fundicion Tipographica Neufville, SA.

MS Windows is a trademark of Microsoft Corporation.

Printing History

First Edition - June, 1989

This manual was created on a Hewlett-Packard Vectra Personal Computer using Ventura Publisher. The camera-ready text was generated on a Hewlett-Packard LaserJet IID printer.

Table of Contents

About the Persuasive Presentations Font Cartridge	1
Overhead Transparencies	2
Letter Gothic	2
Presentation	3
Serifa	4
Helv Outline	4
Line Draw	5
PC Line	5
Persuasive Presentations Font Cartridge Installation	6
Inserting the Persuasive Presentations Font Cartridge	6
About Printer Drivers	7
In Case of Difficulty	8
Helpful Hints	8
Incorrect Fonts	9
FE Error	10
Calling for Help	10
Reference Information	11
Keyboard Layout	11
Keyboards other than US English	12
Symbol Set Charts	15
Printer Commands	20
Font Characteristic Charts	23
Hewlett-Packard Custom Font Services	27
Ordering Fonts	28

About the Persuasive Presentations Font Cartridge

Thank you for purchasing the **HP Persuasive Presentations** font cartridge. This cartridge is designed to aid in creating great-looking, effective presentations. You can choose from large proportional or fixed pitch fonts to print truly professional looking presentations that are exciting, informative and easy to read.

The **HP Persuasive Presentations** font cartridge offers the following special features:

- Letter Gothic, Presentation, Helv Outline and Serifa typefaces which are offered in a variety of large point sizes in both portrait and landscape orientation.
- PC Line and Line Draw fonts offer a variety of vertical and horizontal lines which make it possible to create boxes, borders and charts.
- Compatible with all LaserJet printers except the LaserJet (2686A), LaserJet PLUS and LaserJet 500 PLUS printers.

This manual describes the contents and how to effectively use the **HP Persuasive Presentations** font cartridge.

Note

If the software package you are using does not allow you to select the **HP Persuasive Presentations** font cartridge, contact your software vendor and ask for a update to your software package.

With the **HP Persuasive Presentations** font cartridge installed, you can print with any of the fonts shown and described on the following pages. The fonts can be used in addition to, or in combination with your printer's internal fonts or any other HP fonts, assuming your software supports them.

Overhead Transparencies

The fonts on the **HP Persuasive Presentations** font cartridge can be used to prepare professional-looking presentations, and can be printed directly on overhead transparencies with your LaserJet printer.

Specially treated film is available. Order HP Part Number 92285J. This film is specifically designed with a coating that dries quickly so your transparencies are ready to use the second they are printed.

Letter Gothic

Letter Gothic is a fixed pitch, sans serif typewriter typeface. Letter Gothic's large, 14 point font offered in the **HP Persuasive Presentations** cartridge has a clean and modern appearance which makes text easy to read at a glance.

Figure 1 shows the Letter Gothic fonts available in the **HP Persuasive Presentations** font cartridge.

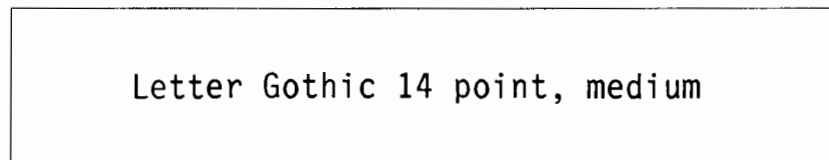


Figure 1. Letter Gothic Sample

Presentation

Presentation is a bold, upright, fixed pitch typeface that lends itself well to headings and listings for overhead presentations. Its lower-case letters are displayed as small capital letters which makes Presentation an excellent choice for presenting information on slides and displays. The fonts are available in 14, 16, 18 and 24 point sizes which are exceptionally legible from a distance.

Figure 2 shows the Presentation fonts available in the HP Persuasive Presentations font cartridge.

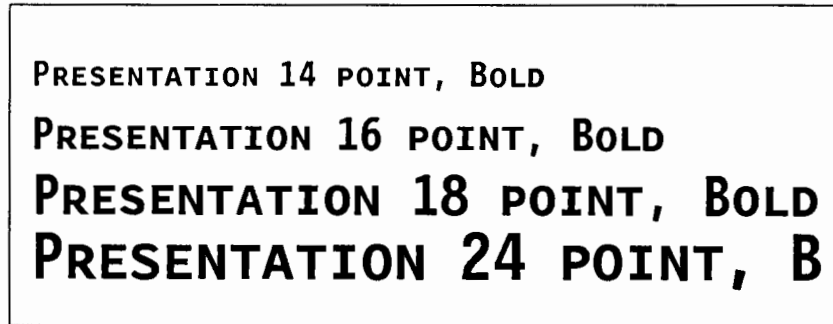


Figure 2. Presentation Sample

Serifa

Serifa is an upright, proportionally spaced typeface that is ideally suited for headings in display ads, slides and signs. The black weight adds to its attention-grabbing appearance. The large, 24 point size font is distinctive and lends itself well to applications needing powerful headings.



Figure 3. Serifa Sample

Helv Outline

Helv Outline is a sans serif, proportionally spaced typeface that is ideally suited for display heads, flyer ads and mailers, signs, forms and packaging. The bold 24 point outline design makes an excellent typeface for eye-catching headings for an overhead display or emphasizing a word within a line of text. You might consider coloring within the outline to “spice up” your presentation.



Figure 4. Helv Outline Sample

Line Draw

Line Draw font offers a variety of vertical and horizontal lines which can be combined to create boxes, borders and charts.

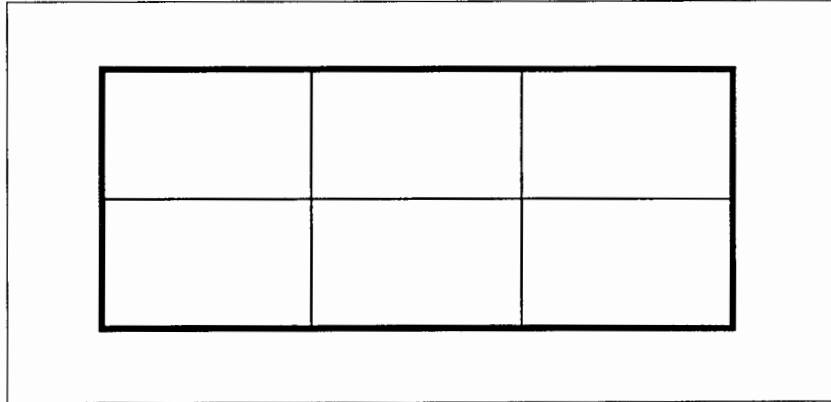


Figure 5. Line Draw Sample

PC Line

Similar to Line Draw, the PC Line font contains individual line and shading elements that can be combined to create boxes and borders.

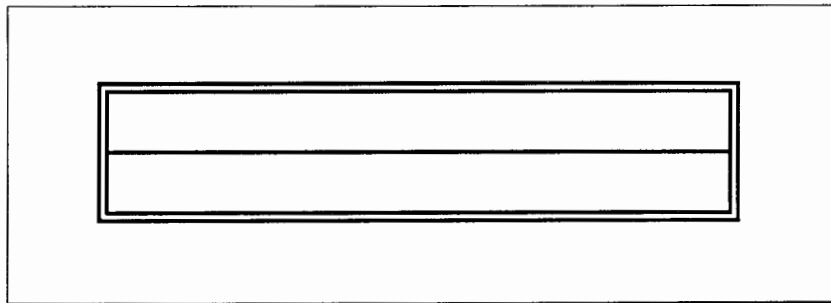


Figure 5. PC Line Sample

Persuasive Presentations Font Cartridge Installation



Inserting the Persuasive Presentations Font Cartridge

To insert the **HP Persuasive Presentations** font cartridge in the printer, complete the following steps:

Caution

If the font cartridge is inserted or removed while the printer is on-line, you will receive an **FE CARTRIDGE** error message. Turn your printer **OFF** and then back **ON** to clear the **FE CARTRIDGE** message.

-
1. Press the [**On Line**] key to take the printer off-line. The on-line indicator light should be off.

Note

If you are inserting the **HP Persuasive Presentations** font cartridge into the LaserJet 2000 printer, the term “off-line”, as used in these instructions, indicates that the printer should be powered off.

-
2. Insert the **HP Persuasive Presentations** font cartridge, label side up, into an available cartridge slot on your printer.

Press the cartridge in firmly until it snaps into place. Make sure that the cartridge is solidly seated in the cartridge slot.

3. Press the [**On Line**] key to return the printer on-line. The on-line indicator should be on.

To remove the font cartridge, press the [**On Line**] key to take the printer off-line (light off). Grasp the edges of the cartridge and pull it out. Press the [**On Line**] key to return the printer on-line (light on).

About Printer Drivers

Most software applications send printer commands by using software drivers that are included with their programs. If you are using this type of software application, you generally do not see the printer commands displayed on the screen. This is because the software automatically send the commands to the printer for you.

Printer drivers are programs that your software developers create to send job and page set-up commands (including descriptions of fonts) to the printer. Drivers work automatically so you do not have to enter the commands yourself.

If your software package does not have a specific printer driver for the **HP Persuasive Presentations** font cartridge, you should contact your software vendor and request a driver.

If you want to select the Letter Gothic and Presentation fonts, and don't have a driver for this cartridge, you can select the HP 92286R font cartridge driver (for these fonts only). To access Serifa and Helv Outline, a new **HP Persuasive Presentations** driver is required.

In Case of Difficulty

This section provides information pertaining to some of the common problems you may encounter while using the **HP Persuasive Presentations** font cartridge with the LaserJet printer and their possible causes and solutions. First, read the helpful hint section which aids in isolating the problem. Then, scan the left headings until you find the cause of the problem and then perform the recommended solution.

Helpful Hints

- Is the **HP Persuasive Presentations** font cartridge firmly seated in the slot? Take the printer off-line. Push the font cartridge in until it snaps in place. Be sure that the cartridge is firmly seated. Return the printer on-line. Perform a print fonts test to verify that the printer recognizes the font cartridge (refer to the Printer's User Manual).
- Is the correct driver selected? See **Software Driver Availability** for instructions. Look at the printer selection menu within your software package to select the **HP Persuasive Presentations** font cartridge.

If your software program does not allow you to select the driver for the **HP Persuasive Presentations** font cartridge, contact your software manufacturer regarding the availability of a printer driver, or refer to your software manual for instructions on how to embed printer commands (escape sequences) to select the desired font.

Incorrect Fonts

If your document, or a portion of it, is not printing in the correct font, ask yourself these questions and try the solution.

Cause 1. Is the font cartridge properly installed?

Solution 1. Take the printer off-line, remove the font cartridge and press the cartridge in firmly until it snaps into place. Perform a print fonts test to verify that the printer recognizes the font cartridge (refer to the Printer's User Manual). Place the printer on-line and try printing again.

Cause 2. Did you install the correct printer definition and fonts?

Solution 2. Repeat the installation procedures described in this manual. (Refer to your Software Application Manual for instructions on installing your printer).

Cause 3. When selecting fonts, are you specifying the desired font, or simply specifying the size?

Solution 3. Refer to the sections in your software application manual that explains how to select a font within your software package.

FE Cartridge Error

Cause: Did you insert or remove the font cartridge while the printer was on-line?

Solution: Turn your printer OFF and then back ON.

Calling for Help

If you are having trouble accessing fonts from this cartridge, make sure you have followed the procedures outlined in this manual correctly. If your software is not accessing the correct fonts, contact your software company for assistance.

If you are having trouble with the **HP Persuasive Presentations** font cartridge and are in need of assistance, you can call the authorized HP dealer where you purchased your **HP Persuasive Presentations** font cartridge.

If you are having trouble with your LaserJet printer, Hewlett-Packard offers support through the Personal Peripheral Assist Line. A customer assistance operator can offer advice to help solve your technical problems. The Personal Peripheral Assist Line number is:

(208) 323-2551

The Personal Peripheral Assist Line is open from 7:00 a.m. to 6:00 p.m. (Mountain Standard Time), except for Wednesday, when it is open from 7:00 a.m. to 4:00 p.m.

Reference Information

The information presented in this section is of special interest to those users who require additional information for regarding accessing characters using the Line Draw and PC Line Keystroke Equivalent Charts, ASCII, Legal, Line Draw and PC Line symbol set tables, using printer commands and a complete table listing of **HP Persuasive Presentations** cartridge font characteristics.

Keyboard Layouts

Included in this manual are keyboard layouts designed for US English keyboards. Using these layouts, you can quickly identify the location of the Line Draw and PC Line symbols.

The keyboard layout shows which Line Draw or PC Line symbols are assigned to each key. To familiarize yourself with accessing the Line Draw characters refer to the Keystroke Layout Charts on page 13-14 and try the following example.

Example-Using the Keystroke Layout Chart

In this example you will access and print the **┌** (upper-left corner) symbol from the Line Draw Symbol Set.

1. Using your application software, open a new document and select the Line Draw, medium, 10 pitch, 14 point font with the Line Draw Symbol Set.
2. Refer to the Line Draw Keystroke Layout Chart on page 13.
3. Locate the **┌** upper-left corner symbol (under the upper case Q).

All the Line Draw and PC Line Draw symbols are directly accessible through the US English keyboard.

4. Type a "Q".

Although the **┌** (upper-left corner) symbol will not appear on your monitor screen, the left corner symbol will appear correctly when you print your document.

5. Print the document.

Keyboards other than US English

If you are using a computer with anything other than a US English keyboard, you will not be able to use the keyboard layouts. Different keyboards designed for use with languages other than US English map their keys to different ASCII locations.

For most software applications, use the [Alt] key to access all of the Line Draw or PC Line symbols by typing in the three-digit* decimal value on your numeric keypad.

Example-Using the Symbol Set Charts

To access the **┌** (upper-left corner) symbol from the Line Draw symbol set using a non-US English keyboard follow these steps:


1. Using your application software, open a new document and select the Line Draw font, medium, 10 pitch, 14 point font with the Line Draw Symbol Set.
2. Refer to the Line Draw symbol set table on page 19.
3. Locate the **┌** upper-left corner symbol (number 81).
4. Hold down the [Alt] key and type in "081" using your numeric keypad.*
5. Release the [ALT] key.

Although the **┌** symbol will not appear on your monitor screen, the left corner symbol will appear correctly when you print your document.

6. Print the document.

*Refer to your software manual for information about accessing extended or special characters. MS Windows software applications require a leading zero, therefore four digits are required.

Line Draw Keystroke Equivalents Chart

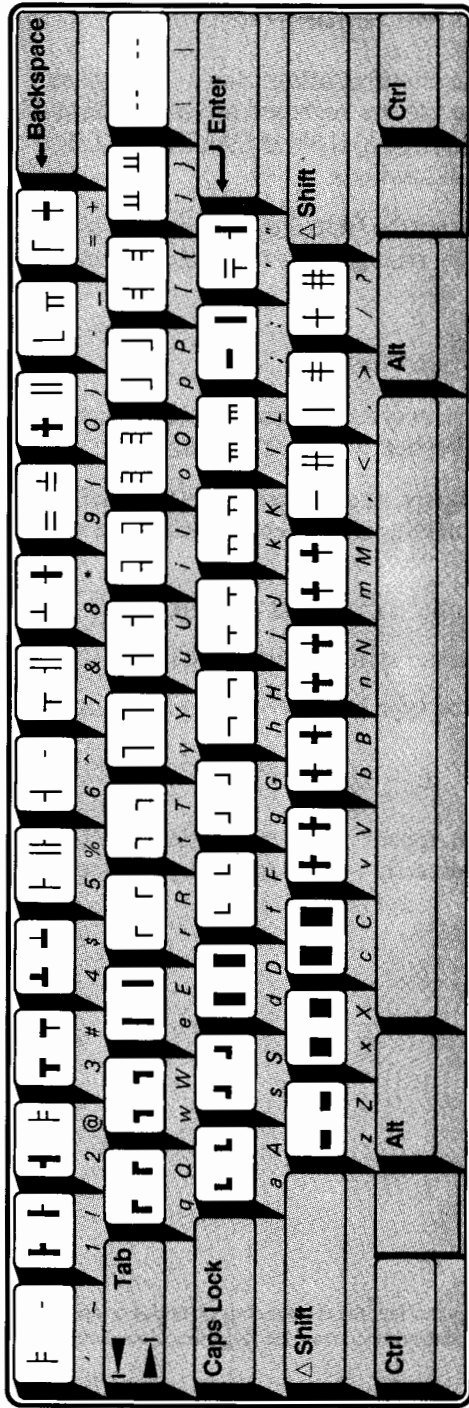

Character/Symbol

ASCII Keystroke

Character/Symbol

ASCII Keystroke


Character/Symbol

ASCII Keystroke

Character/Symbol	! " # \$ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 : ; < = > ?
ASCII Keystroke	! " # \$ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 : ; < = > ?
Character/Symbol	@ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _
ASCII Keystroke	@ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _
Character/Symbol	, a b c d e f g h i j k l m n o p q r s t u v w x y z { } ~
ASCII Keystroke	, a b c d e f g h i j k l m n o p q r s t u v w x y z { } ~

Copy, fold and place this chart near your computer keyboard for quick reference.

PC Line Keystroke Equivalents Chart

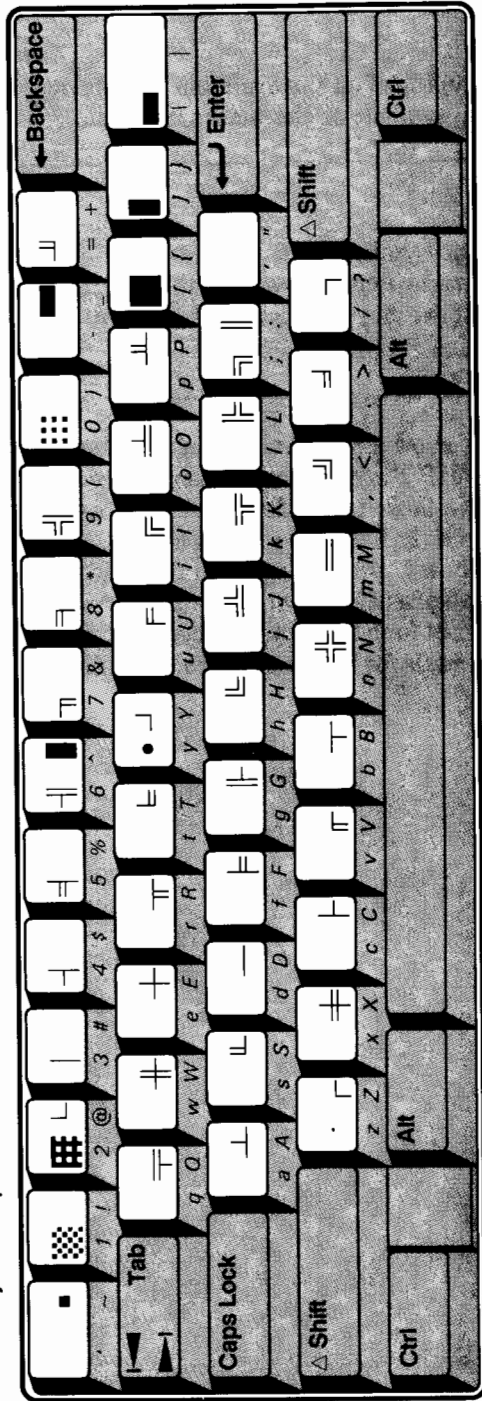

Character/Symbol	ASCII Keystroke
! " # \$ % & ' () * + , - . / 0 1 2 3 4 5 6 7 8 9 : ; < = > ?	
Character/Symbol	ASCII Keystroke
@ A B C D E F G H I J K L M N O P Q R S T U V W X Y Z [\] ^ _	
Character/Symbol	ASCII Keystroke
` a b c d e f g h i j k l m n o p q r s t u v w x y z { } ~	

Copy, fold and place this chart near your computer keyboard for quick reference.

Symbol Set Charts

A symbol set is a unique sub-grouping of all the available alphabetic, numeric, punctuation and special symbols or characters in a font.

Note

Not all special characters or symbols will appear on your monitor screen when they are selected, however, the special characters or symbols will appear on your document when you print.

The tables on the following pages show and identify all of the characters and symbols available in the **HP Persuasive Presentations** font cartridge. The shaded areas in these tables denote printer control code areas. The characters on the right half of the tables are not usually found on a computer keyboard. Depending upon the kind of computer or software program you are using, there may be several ways to print characters that are not found on your keyboard. Refer to your computer or software manuals for information on printing them.

Table 1. ASCII Symbol Set.

NUL 0	DLE 16	SP 32	0 48	@ 64	P 80	' 96	p 112			160	176	192	208	224	240
SOH 1	DC1 17	!	1 49	A 65	Q 81	a 97	q 113			161	177	193	209	225	241
STX 2	DC2 18	"	2 50	B 66	R 82	b 98	r 114			162	178	194	210	226	242
ETX 3	DC3 19	#	3 51	C 67	S 83	c 99	s 115			163	179	195	211	227	243
EOT 4	DC4 20	\$	4 52	D 68	T 84	d 100	t 116			164	180	196	212	228	244
ENQ 5	NAK 21	%	5 53	E 69	U 85	e 101	u 117			165	181	197	213	229	245
ACK 6	SYN 22	&	6 54	F 70	V 86	f 102	v 118			166	182	198	214	230	246
BEL 7	ETB 23	'	7 55	G 71	W 87	g 103	w 119			167	183	199	215	231	247
BS 8	CAN 24	(8 56	H 72	X 88	h 104	x 120			168	184	200	216	232	248
HT 9	EM 25)	9 57	I 73	Y 89	i 105	y 121			169	185	201	217	233	249
LF 10	SUB 26	*	:	J 74	Z 90	j 106	z 122			170	186	202	218	234	250
VT 11	ESC 27	+	;	K 75	[91	k 107	{ 123			171	187	203	219	235	251
FF 12	FS 28	,	<	L 76	\ 92	l 108	 124			172	188	204	220	236	252
CR 13	GS 29	-	=	M 77] 93	m 109	} 125			173	189	205	221	237	253
SO 14	RS 30	.	>	N 78	^ 94	n 110	~ 126			174	190	206	222	238	254
SI 15	US 31	/	?	O 79	_ 95	o 111	☐ 127			175	191	207	223	239	255



Table 2. Legal Symbol Set.

NUL 0	DLE 16	SP 32	0 48	@ 64	P 80	° 96	p 112			160	176	192	208	224	240
SOH 1	DC1 17	!	1 49	A 65	Q 81	a 97	q 113			161	177	193	209	225	241
STX 2	DC2 18	"	2 50	B 66	R 82	b 98	r 114			162	178	194	210	226	242
ETX 3	DC3 19	#	3 51	C 67	S 83	c 99	s 115			163	179	195	211	227	243
EOT 4	DC4 20	\$	4 52	D 68	T 84	d 100	t 116			164	180	196	212	228	244
ENO 5	NAK 21	%	5 53	E 69	U 85	e 101	u 117			165	181	197	213	229	245
ACK 6	SYN 22	&	6 54	F 70	V 86	f 102	v 118			166	182	198	214	230	246
BEL 7	ETB 23	'	7 55	G 71	W 87	g 103	w 119			167	183	199	215	231	247
BS 8	CAN 24	(8 56	H 72	X 88	h 104	x 120			168	184	200	216	232	248
HT 9	EM 25)	9 57	I 73	Y 89	i 105	y 121			169	185	201	217	233	249
LF 10	SUB 26	*	10 58	J 74	Z 90	j 106	z 122			170	186	202	218	234	250
VT 11	ESC 27	+	11 59	K 75	[91	k 107	§ 123			171	187	203	219	235	251
FF 12	FS 28	,	12 60	L 76	® 92	l 108	¶ 124			172	188	204	220	236	252
CR 13	GS 29	-	13 61	M 77] 93	m 109	† 125			173	189	205	221	237	253
SO 14	RS 30	.	14 62	N 78	© 94	n 110	™ 126			174	190	206	222	238	254
SI 15	US 31	/	15 63	O 79	— 95	o 111	☒ 127			175	191	207	223	239	255

Table 3. PC Line Symbol Set.

































NUL 0	DLE 16	SP 32			64	80	96	112											160	176	192	208	224	240
SOH 1	DC1 17	33			65	81	97	113											161	177	193	209	225	241
STX 2	DC2 18	34			66	82	98	114											162	178	194	210	226	242
ETX 3	DC3 19	35			67	83	99	115											163	179	195	211	227	243
EOT 4	DC4 20	36			68	84	100	116											164	180	196	212	228	244
ENC 5	NAK 21	37			69	85	101	117											165	181	197	213	229	245
ACK 6	SYN 22	38			70	86	102	118											166	182	198	214	230	246
BEL 7	ETB 23	39			71	87	103	119											167	183	199	215	231	247
BS 8	CAN 24	40			72	88	104	120											168	184	200	216	232	248
HT 9	EM 25	41			73	89	105	121											169	185	201	217	233	249
LF 10	SUB 26	42			74	90	106	122											170	186	202	218	234	250
VT 11	ESC 27	43			75	91	107	123											171	187	203	219	235	251
FF 12	FS 28	44			76	92	108	124											172	188	204	220	236	252
CR 13	GS 29	45			77	93	109	125											173	189	205	221	237	253
SO 14	RS 30	46			78	94	110	126											174	190	206	222	238	254
SI 15	US 31	47			79	95	111	127											175	191	207	223	239	255

Table 4. Line Draw Symbol Set.

NUL 0	DLE 16	SP 32	48	64	80	96	112			160	176	192	208	224	240
SOH 1	DC1 17	33	49	65	81	97	113			161	177	193	209	225	241
STX 2	DC2 18	34	50	66	82	98	114			162	178	194	210	226	242
ETX 3	DC3 19	35	51	67	83	99	115			163	179	195	211	227	243
EOT 4	DC4 20	36	52	68	84	100	116			164	180	196	212	228	244
ENQ 5	NAK 21	37	53	69	85	101	117			165	181	197	213	229	245
ACK 6	SYN 22	38	54	70	86	102	118			166	182	198	214	230	246
BEL 7	ETB 23	39	55	71	87	103	119			167	183	199	215	231	247
BS 8	CAN 24	40	56	72	88	104	120			168	184	200	216	232	248
HT 9	EM 25	41	57	73	89	105	121			169	185	201	217	233	249
LF 10	SUB 26	42	58	74	90	106	122			170	186	202	218	234	250
VT 11	ESC 27	43	59	75	91	107	123			171	187	203	219	235	251
FF 12	FS 28	44	60	76	92	108	124			172	188	204	220	236	252
CR 13	GS 29	45	61	77	93	109	125			173	189	205	221	237	253
SO 14	RS 30	46	62	78	94	110	126			174	190	206	222	238	254
SI 15	US 31	47	63	79	95	111	127			175	191	207	223	239	255

Printer Commands

If your software package does not have a selection the **HP Persuasive Presentations** font cartridge contact your software vendor regarding the availability of a driver. Drivers automatically send printer commands for font selections.

If a driver is not available, you can access the fonts on the **HP Persuasive Presentations** font cartridge using printer commands, if your software package allows you to embed these commands into your files. Look in the “printing” section of your software manual to see how your software works with the printer.

Tables 5, 6, 7, 8 and 9 show the typeface, orientation, symbol set, spacing (pitch), point size, style, weight and full printer command for each of the ASCII, Legal, PC Line and Line Draw fonts available in the **HP Persuasive Presentations** font cartridge.

Read the following instructions before selecting fonts using the printer commands:

- Use of the full printer command ensures correct font selection for any application. For further information on printer commands see the User’s Manual or Technical Reference Manual for your printer.
- Printer commands (escape sequence) always begin with the escape character ^c . The escape character is followed by a unique series of letters and numbers that tell the printer what to do.
- The escape character ^c is often represented by either **1B** (hexadecimal) or **027** (decimal).

- Before using printer commands, take a moment to compare these characters:

Lower-case l - ℓ

Upper-case O - O

Number one - 1

Number zero - 0

Don't let the differences between these characters confuse you. Many printer commands use the lower-case l (ℓ) and the number one (1), or the upper-case O (O) and the number zero (0). These characters may not appear on your screen as shown below.

- Use `^C&ℓ0O` to specify portrait orientation.
- Use `^C&ℓ1O` to specify the landscape orientation.

Figure 12 shows the difference between portrait and landscape orientation.

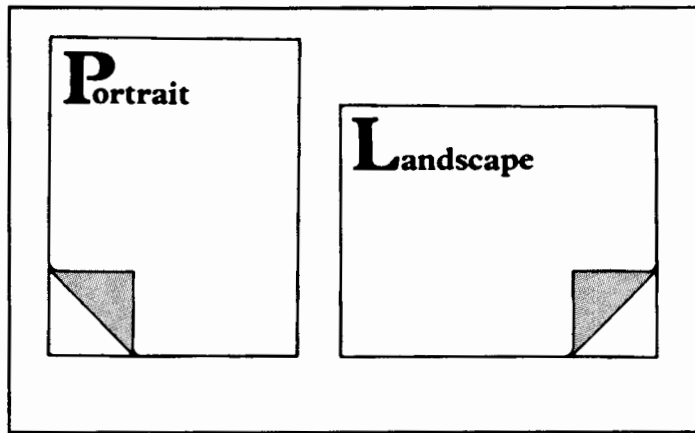


Figure 12. Portrait and Landscape Orientation.

Examples-Selecting Printer Commands

The following example shows how to select the Letter Gothic (typeface), portrait (orientation), ASCII (symbol set), fixed-spacing, 10 pitch, 14 point, upright, medium font:

```
^C&@O^C(OU^C(s0p10h14v0s0b6T
```

The following example shows how to select the Presentation (typeface), landscape (orientation), Legal (symbol set), fixed-spacing, 8.1 pitch, 16 point, upright, bold font:

```
^C&@1O^C(1U^C(s0p8.1h16v0s3b11T
```

Refer to your printer's User's Manual or Technical Reference Manual for additional information on printer commands.

Table 5. Letter Gothic Font Characteristics

TYPEFACE	ORIENTATION	SYMBOL SET	SPACING	POINT SIZE	STYLE	WEIGHT	PRINTER COMMAND
Letter Gothic	Portrait	ASCII	10	14	Upright	Medium	$E_c \& \ell \theta O_{E_c}(\theta U_{E_c}(s\theta p1\theta h14y\theta s\theta b\theta T$
Letter Gothic	Landscape	ASCII	10	14	Upright	Medium	$E_c \& \ell \theta O_{E_c}(\theta U_{E_c}(s\theta p1\theta h14y\theta s\theta b\theta T$
Letter Gothic	Portrait	Legal	10	14	Upright	Medium	$E_c \& \ell \theta O_{E_c}(1U_{E_c}(s\theta p1\theta h14y\theta s\theta b\theta T$
Letter Gothic	Landscape	Legal	10	14	Upright	Medium	$E_c \& \ell \theta O_{E_c}(1U_{E_c}(s\theta p1\theta h14y\theta s\theta b\theta T$

Table 7. Helv Outline Font Characteristics

TYPEFACE	ORIENTATION	SYMBOL SET	SPACING	POINT SIZE	STYLE	WEIGHT	PRINTER COMMAND
Helv Outline	Portrait	ASCII	Prop	24	Upright	Black	$E_c \& \emptyset \emptyset E_c (\emptyset U^{E_c} (s1p24v\emptyset s5b25T$
Helv Outline	Landscape	ASCII	Prop	24	Upright	Black	$E_c \& \emptyset 1 O^{E_c} (\emptyset U^{E_c} (s1p24v\emptyset s5b25T$
Helv Outline	Portrait	Legal	Prop	24	Upright	Black	$E_c \& \emptyset \emptyset O^{E_c} (1 U^{E_c} (s1p24v\emptyset s5b25T$
Helv Outline	Landscape	Legal	Prop	24	Upright	Black	$E_c \& \emptyset 1 O^{E_c} (1 U^{E_c} (s1p24v\emptyset s5b25T$

Table 8. Serifa Font Characteristics

TYPEFACE	ORIENTATION	SYMBOL SET	SPACING	POINT SIZE	STYLE	WEIGHT	PRINTER COMMAND
Serifa	Portrait	ASCII	Prop	24	Upright	Black	$E_c \& \emptyset \emptyset O^{E_c} (\emptyset U^{E_c} (s1p24v\emptyset s5b13T$
Serifa	Landscape	ASCII	Prop	24	Upright	Black	$E_c \& \emptyset 1 O^{E_c} (\emptyset U^{E_c} (s1p24v\emptyset s5b13T$
Serifa	Portrait	Legal	Prop	24	Upright	Black	$E_c \& \emptyset \emptyset O^{E_c} (1 U^{E_c} (s1p24v\emptyset s5b13T$
Serifa	Landscape	Legal	Prop	24	Upright	Black	$E_c \& \emptyset 1 O^{E_c} (1 U^{E_c} (s1p24v\emptyset s5b13T$

Table 9. Line Draw Font Characteristics

TYPEFACE	ORIENTATION	SYMBOL SET	SPACING	POINT SIZE	STYLE	WEIGHT	PRINTER COMMAND
Line Draw	Portrait	Line	10	14	Upright	Medium	$E_C \& \& \& \& O_{E_C}(\& B_{E_C}(s \& p \& 1 \& h \& 1 \& 4 \& v \& 0 \& s \& 0 \& b \& 0 \& T$
		Draw					
Line Draw	Landscape	Line	10	14	Upright	Medium	$E_C \& \& \& \& 1 O_{E_C}(\& B_{E_C}(s \& p \& 1 \& 0 \& h \& 1 \& 4 \& v \& 0 \& s \& 0 \& b \& 0 \& T$
		Draw					

Table 9. PC Line Font Characteristics

TYPEFACE	ORIENTATION	SYMBOL SET	SPACING	POINT SIZE	STYLE	WEIGHT	PRINTER COMMAND
PC Line	Portrait	PC Line	10	14	Upright	Bold	$E_C \& \& \& \& \& O_{E_C}(4 Q_{E_C}(s \& p \& 1 \& 0 \& h \& 1 \& 4 \& v \& 0 \& s \& 3 \& b \& 0 \& T$
PC Line	Landscape	PC Line	10	14	Upright	Bold	$E_C \& \& \& \& \& 1 O_{E_C}(4 Q_{E_C}(s \& p \& 1 \& 0 \& h \& 1 \& 4 \& v \& 0 \& s \& 3 \& b \& 0 \& T$

Hewlett-Packard Custom Font Services

Hewlett-Packard Custom Font Cartridges and Soft Fonts are now available.

Design your own custom font cartridge or soft font package to fit your particular needs. Choose from the following font options:

- Any font from an existing Hewlett-Packard standard font cartridge product.
- Any font from the Hewlett-Packard AC-AG, DA, DC or EA Soft Font Collection.
- Arabic, Hebrew and Cyrillic typefaces.
- Bar codes including 3 of 9, Codabar, UPC and others.
- Custom symbol set mappings.
- Signatures.
- Soft font site licensing.

For information on these services, contact Hewlett-Packard Boise Division Product Specials, 11311 Chinden Blvd., MS 159, Boise, Idaho 83714, (208) 323-3684.

Ordering Fonts

Hewlett-Packard offers a growing library of different font cartridges.

Check with your authorized HP dealer to see which new font products are available.

To locate the dealer nearest you, call:

USA - 1-800-752-0900

Canada - 1-800-387-3867

Other countries: contact an authorized HP dealer or local HP sales office.

If your dealer is temporarily out of stock, call HP DIRECT:

USA - 1-800-538-8787

Canada

Toronto - 416-671-8383

Ontario/Quebec - 1-800-387-3417

Other Provinces - 1-800-387-3154

For additional product information call:

CIC (Customer Information Center) 1-800-752-0900



Persuasive Presentations



Cartridge Contents

Typeface	Point Size	Pitch	Portrait	Landscape	Symbol Set
Letter Gothic	14	10	•	•	ASCII, Legal
PRESENTATION	14, 16, 18, 24	10, 8.1, 6.5, 5.7	•	•	ASCII, Legal
Helv Outline®	24	Proportional	•	•	ASCII, Legal
Serifa™	24	Proportional	•	•	ASCII, Legal
Line Draw	14	10	•	•	Line Draw
PC Line	14	10	•	•	PC Line

© Copyright Hewlett-Packard Company 1989
 Contents made in Puerto Rico

Supports the HP LaserJet printer family, excluding the HP LaserJet 2886A, LaserJet PLUS and LaserJet 500 PLUS printers.

Serifa is a registered trademark of Fundicion Tipografica Neufville SA.